

# SVI Trucks

## **STAFF PROFILE AND EXPERIENCE**

A list of key staff personnel who will work on this project including a photo and number of years of work experience in their particular field shall be provided with proposal. This list will include but not be limited to key; Sales, Contract Administration, Purchasing, Engineering, Fabrication, Electrical Systems including IT, Finish, and Warranty/Service support personnel.

## **LIABILITY INSURANCE**

The manufacturer shall furnish with the bid a certificate of insurance for;

Workman's Compensation and Employer's Liability Insurance covering for all employees.

General Liability (each occurrence) of \$1,000,000.00. General Aggregate coverage of \$2,000,000.00. Products Completed / Operations Aggregate coverage of \$2,000,000.00. Medical Expense coverage of \$5,000 (any one person). Personal Injury of \$1,000,000.00.

Automobile liability of \$1,000,000.00 combined single limit (each accident), including any auto, all owned autos, scheduled autos, hired autos, non-owned autos, and garage liability.

Excess Umbrella Liability coverage of \$4,000,000.00 each occurrence, Aggregate of \$4,000,000.00. Garage Keepers Liability coverage of \$4,500,000.00 combined limit.

All insurance policies must be;

- Maintained for the life of the contract,
- Must provide ten (10) days notice before cancellation,
- Must cover all operations of the contractor, or anyone employed by them.

## **INTERNET IN-PROCESS SITE**

The manufacturer shall post and maintain a website where the Henderson Fire Department will be able to view digital images of their apparatus as its being built. The digital images shall be posted once a week starting when the body begins production or when the cab/chassis arrives and shall continue until the final completion of unit.

## **ENGINEERING DRAWINGS**

The evaluation of bids shall also be based on design, engineering reliability, and completeness of drawings. No Bidder's proposal shall be considered unless complete engineering drawings to these specifications are submitted with the request for proposal package. Failure to submit factory prepared blueprints with bid shall result in automatic rejection. Submission of "bid drawings" are in addition to "production drawings" which must be submitted for Henderson Fire Department approval prior to construction. Bid drawings shall allow the Henderson Fire Department the ability to fully evaluate required product.

The engineering drawings shall be produced on computer aided design (CAD) equipment to assure critical tolerance and detail only available with CAD equipment. The drawings shall be on "B" size paper, 17" x 11" in size, and views must be 1/4" = 1' - 0" scale. This shall allow the Henderson Fire Department the ability to compare drawings of all manufacturers on an "equal" basis. The drawings shall be completed only by the body manufacturer, and must be exactly to Henderson Fire Department specifications. Submission of "similar to" drawings or "statements referring to later submission of drawings after award of contract" shall be automatically

# SVI Trucks

rejected.

Since the request for proposal package will require extensive evaluation by Henderson Fire Department, all Bidders must submit exactly the same engineering drawings at the same scale, on the same size paper. For easy comparison of drawings, they must be on a 17" x 11" sheet as follows:

- All bid drawings will be stamped BID DRAWING.
- All items shown on the drawing will be pre-designed with regards to layout and functionality prior to the completion of the BID DRAWING.
- Two (2) 17" x 11" color drawings will be supplied with the bid proposal. Black and white or blue line drawings will not be accepted.
- There shall be five (5) views of the truck with the doors closed (Top, Left, Right, Front, Rear), four (4) views of the truck with the doors open (Top, Left, Right, Rear) and four (4) views of any walk-in area (Top, Left, Right, Rear).
- All compartment door openings and usable space shall be clearly shown in inches.
- The trucks overall length, height, width, wheelbase and cab-to-axle dimensions shall be clearly shown.
- The angles of approach and departure shall be shown in the maximum loaded condition to the nearest degree.
- All lighting packages will be clearly shown on the drawing and verified accurate per the most current NFPA standards (when applicable).
- The exterior view shall show all scene lights, marker lights, speakers, horns, exhaust, tow points, exterior outlets, windows, winch receivers, tow hitches, exterior ladders and any other item important to the function of the vehicle.
- The open view shall show all trays, shelves, air system components, hydraulic components, tool boards, storage modules and any other items important to the function of the vehicle.
- The interior view for all walk-in areas shall show all seating positions, desks, cabinets, windows, tech equipment, radio locations and any other item important to the function of the vehicle.
- Any changes to the BID drawing will require a revision which will be clearly annotated in the upper right hand side of the drawing showing the revision number, reason for the revision, date and who made the changes.

Text Block Items;

- Purchaser's name.
- Body size and material type.
- Chassis manufacturer and model number.
- Unit description.
- Wheelbase (WB) , Cab-to-axle (CA) distance.
- Overall length (OAL), Overall width, (OAW), Overall height (OAH).
- Scale, date, drawn by, drawing number and sheet number.

## **PERSONNEL PROTECTION**

Guards, shields, or other protection shall be provided where necessary in order to prevent injury of personnel by hot, moving, or rotating parts during non maintenance operations.

Electrical insulation or isolation shall be provided where necessary in order to prevent electrical shock from onboard electrical systems.

Vehicular workmanship shall ensure an operating environment free of accessible sharp projections and edges.

# SVI Trucks

## Table of Contents

<b>LIABILITY INSURANCE</b> .....	1
<b>INTERNET IN-PROCESS SITE</b> .....	1
<b>ENGINEERING DRAWINGS</b> .....	1
<b>PERSONNEL PROTECTION</b> .....	2
<b>CONTROLS AND INSTRUCTIONS</b> .....	9
<b>COMPONENT PROTECTION</b> .....	9
The fire apparatus shall meet the requirements of this standard in ambient temperature conditions between 32°F (0°C) and 110°F (43°C).....	10
<b>HIGHWAY PERFORMANCE</b> .....	10
<b>SERVICEABILITY</b> .....	10
<b>FIRE APPARATUS DOCUMENTATION</b> .....	11
<b>OPERATIONS AND SERVICE DOCUMENTATION</b> .....	12
<b>NFPA REQUIRED DOCUMENTATION FORMAT - USB FLASH DRIVE</b> .....	13
<b>STATEMENT OF EXCEPTIONS</b> .....	13
<b>CARRYING CAPACITY</b> .....	13
<b>TESTING</b> .....	14
<b>ROAD TEST</b> .....	15
<b>LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST</b> .....	15
<b>TEST SEQUENCE</b> .....	15
<b>1. RESERVE CAPACITY TEST</b> .....	15
<b>2. ALTERNATOR PERFORMANCE TEST</b> .....	15
<b>TEST AT IDLE</b> .....	16
<b>TEST AT FULL LOAD</b> .....	16
<b>3. LOW VOLTAGE ALARM TEST</b> .....	16
<b>LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST</b> .....	16
<b>DOCUMENTATION</b> .....	16
<b>UL 120/240 VAC CERTIFICATION</b> .....	16
<b>DIELECTRIC VOLTAGE WITHSTAND TEST</b> .....	18
<b>PERFORMANCE BOND</b> .....	18
<b>WARRANTY</b> .....	18

# SVI Trucks

<b>GENERAL LIMITED WARRANTY - TWO (2) YEARS</b> .....	19
<b>LOW VOLTAGE ELECTRICAL WARRANTY - FIVE (5) YEARS</b> .....	19
<b>STRUCTURAL WARRANTY - TEN (10) YEARS</b> .....	19
<b>UNDERCOAT WARRANTY</b> .....	19
<b>PAINT LIMITED WARRANTY - TEN (10) YEARS</b> .....	19
<b>GRAPHICS LIMITED WARRANTY</b> .....	19
<b>CONSTRUCTION PERIOD</b> .....	19
<b>OVERALL HEIGHT REQUIREMENT</b> .....	19
<b>OVERALL LENGTH REQUIREMENT</b> .....	20
<b>OVERALL WIDTH</b> .....	20
<b>DELIVERY AND DEMONSTRATION</b> .....	20
<b>CAB/CHASSIS PREPAYMENT</b> .....	63
<b>CHASSIS MODIFICATIONS</b> .....	63
<b>LUBRICATION AND TIRE DATA PLATE</b> .....	63
<b>VEHICLE DATA PLATE</b> .....	63
<b>OVERALL HEIGHT, LENGTH DATA PLATE (US)</b> .....	64
<b>FRONT BUMPER</b> .....	65
<b>BUMPER GRAVELSHIELD</b> .....	65
<b>AIR HORN(S)</b> .....	66
<b>FRONT TOW PROVISIONS</b> .....	66
<b>EXHAUST</b> .....	66
<b>GPS / OPTICOM ANTENNA INSTALLATION</b> .....	66
<b>MDT ANTENNA INSTALLATION</b> .....	66
<b>RADIO/ANTENNA INSTALLATION</b> .....	67
<b>SEAT BELT COLOR</b> .....	67
<b>SEAT BELT WEB LENGTH - CUSTOM CAB</b> .....	67
<b>SEAT BELT / VDR SYSTEM - CUSTOM CAB</b> .....	67
<b>HELMET STORAGE</b> .....	67
<b>HELMET STORAGE</b> .....	67
<b>CAB CRASH TEST CERTIFICATION</b> .....	68
<b>CAB MIRRORS, DRIVER ADJUSTABLE</b> .....	68

# SVI Trucks

<b>MUDFLAPS</b> .....	68
<b>AIR BRAKE SYSTEM QUICK BUILD-UP</b> .....	68
<b>ROAD EMERGENCY SAFETY KIT</b> .....	68
<b>REAR CAB DESK LAYOUT</b> .....	68
<b>REAR CAB DESK - "L" SHAPED</b> .....	68
<b>DESKTOP COMPONENT CONSOLE</b> .....	69
<b>MAP LIGHT</b> .....	69
<b>CAB INTERIOR CABINET - OVERHEAD</b> .....	69
<b>INTERIOR UNDER CABINET LED LIGHTS</b> .....	69
<b>INTERIOR PEDESTAL SEAT</b> .....	69
<b>CAB INTERIOR CABINET - CURBSIDE REAR WALL</b> .....	70
<b>AIR CONDITIONER - HEATER</b> .....	71
<b>FUEL FILL</b> .....	71
<b>BODY DESIGN</b> .....	71
<b>EXTERIOR ALUMINUM BODY</b> .....	72
<b>ROOF CONSTRUCTION</b> .....	73
<b>BODY SUBFRAME</b> .....	73
<b>BODY MOUNTING</b> .....	73
<b>18" REAR STEP BUMPER</b> .....	73
<b>REAR TOW EYES</b> .....	74
<b>GROUND LIGHTS</b> .....	74
<b>WHEEL WELL EXTERIOR PANEL</b> .....	74
<b>STAINLESS STEEL BODY FENDERS</b> .....	74
<b>WHEEL WELL LINERS</b> .....	74
<b>SCBA CYLINDER COMPARTMENTS</b> .....	74
<b>BODY PAINT SPECIFICATIONS</b> .....	74
<b>BODY PAINT PREPARATION</b> .....	74
<b>PAINT PROCESS</b> .....	75
<b>BODY UNDERCOATING</b> .....	76
<b>UNDERCOAT WARRANTY</b> .....	76
<b>PAINT WARRANTY</b> .....	76

# SVI Trucks

<b>COMPARTMENT INTERIOR FINISH</b> .....	76
<b>REFLECTIVE STRIPE REQUIREMENTS</b> .....	76
<b>REFLECTIVE STRIPE - CAB SIDE</b> .....	77
<b>REFLECTIVE STRIPE - CAB FRONT</b> .....	77
<b>REFLECTIVE STRIPE - CAB DOOR INTERIOR</b> .....	77
<b>REFLECTIVE STRIPE - BODY SIDES</b> .....	78
<b>CHEVRON REFLECTIVE STRIPE - REAR SIDES PANELS</b> .....	78
<b>LETTERING</b> .....	78
<b>EXTERIOR COMPARTMENT DOORS</b> .....	78
<b>ROLL-UP DOOR CONSTRUCTION - ROBINSON (ROM)</b> .....	78
<b>BODY HEIGHT MEASUREMENTS</b> .....	79
<b>ROOF ACCESS STAIRWAY</b> .....	81
<b>STEP COMPARTMENT - UPPER</b> .....	82
<b>FOLD-DOWN STEP</b> .....	82
<b>REAR BODY HANDRAILS</b> .....	82
<b>BODY WIDTH DIMENSIONS</b> .....	82
<b>STREETSIDE COMPARTMENT - FRONT (S1)</b> .....	82
<b>COMPARTMENT LAYOUT</b> .....	83
<b>STREETSIDE COMPARTMENT - AHEAD OF REAR WHEELS (S2)</b> .....	83
<b>COMPARTMENT LAYOUT</b> .....	84
<b>STREETSIDE COMPARTMENT - ABOVE REAR WHEELS (S3)</b> .....	85
<b>COMPARTMENT LAYOUT</b> .....	85
<b>STREETSIDE COMPARTMENT - REAR (S4)</b> .....	86
<b>COMPARTMENT LAYOUT</b> .....	86
<b>CURBSIDE COMPARTMENT - FRONT (C1)</b> .....	87
<b>COMPARTMENT LAYOUT</b> .....	87
<ul style="list-style-type: none"> <li>• There shall be one (1) 100 amp Blue Sea Systems ST Series blade type fuse block with screw type terminals for both positive and negative buss with cover provided for distribution of up to six (6) 30 amp, 12 VDC circuits. Fuse block shall be located per required circuits and be protected from damage.</li> </ul>	
88	
<b>CURBSIDE COMPARTMENT - AHEAD OF REAR WHEEL (C2)</b> .....	88

# SVI Trucks

<b>COMPARTMENT LAYOUT</b> .....	89
<ul style="list-style-type: none"> <li>• There shall be one (1) 100 amp Blue Sea Systems ST Series blade type fuse block with screw type terminals for both positive and negative buss with cover provided for distribution of up to six (6) 30 amp, 12 VDC circuits. Fuse block shall be located per required circuits and be protected from damage.</li> </ul>	
90	
<b>CURBSIDE COMPARTMENT - ABOVE REAR WHEEL (C3)</b> .....	90
<b>COMPARTMENT LAYOUT</b> .....	91
<b>CURBSIDE COMPARTMENT - REAR (C4)</b> .....	91
<b>COMPARTMENT LAYOUT</b> .....	92
<b>ROOF ACCESS STAIRWAY</b> .....	93
<b>STAIRWAY HANDRAILS</b> .....	93
<b>LOW VOLTAGE ELECTRICAL SYSTEM- 12 VDC</b> .....	94
<b>12 VOLT MULTIPLEX CONTROL CENTER</b> .....	97
<b>MULTIPLEX SYSTEM INTERFACE DISPLAY</b> .....	97
<b>BATTERY SWITCH</b> .....	98
<b>BATTERY SOLENOID</b> .....	99
<b>BATTERY CHARGER</b> .....	99
One (1) Newmar model PT-80 battery charger shall be provided ideal for charging multiple battery bank systems. The Newmar Phase Three “Smart” battery charging technology provides significant benefits over traditional float chargers whose output voltage droops under heavy loads, and fails to attain proper voltage levels recommended by battery manufactures as part of a proper charge cycle. These issues are particular significant in Emergency Vehicle applications where rapid recharge is required while powering DC loads, and reliable service life of batteries is critical. PT Series chargers feature multiple isolated outputs to charge independent battery banks.....	99
<b>ENGINE COMPARTMENT LIGHT</b> .....	99
<b>CAB HAZARD WARNING LIGHT</b> .....	99
<b>BACK-UP ALARM</b> .....	100
<b>REAR VIEW CAMERA</b> .....	100
<b>INTERIOR LED LIGHTS</b> .....	100
<b>TAIL LIGHTS</b> .....	100
<b>MIDSHIP MARKER/TURN SIGNAL</b> .....	101
<b>MARKER LIGHTS</b> .....	101
<b>CAB STEP LIGHTS / GROUND LIGHTS</b> .....	101

# SVI Trucks

<b>LICENSE PLATE MOUNTING BRACKET</b> .....	101
<b>ELECTRONIC SIREN</b> .....	101
<b>SIREN SPEAKER</b> .....	101
<b>SIDE SCENE LIGHTS</b> .....	101
<b>REAR SCENE LIGHTS</b> .....	102
<b>DAVID CLARK INTERCOM SYSTEM</b> .....	102
<b>INTERCOM SYSTEM INSTALLATION</b> .....	102
<b>WARNING LIGHT PACKAGE</b> .....	102
<b>UPPER LEVEL OPTICAL WARNING DEVICES</b> .....	103
<b>LOWER LEVEL OPTICAL WARNING DEVICES</b> .....	105
<b>GENERATOR MOUNTING</b> .....	107
<b>FUEL SYSTEM</b> .....	107
<b>STARTING SYSTEM</b> .....	108
<b>COOLING</b> .....	108
<b>EXHAUST SYSTEM</b> .....	108
<b>MANUALS AND SCHEMATICS</b> .....	108
<b>GENERATOR COMPARTMENT INSULATION</b> .....	108
<b>GENERATOR CONTROLS</b> .....	108
<b>LOADCENTER</b> .....	109
<b>GENERATOR MONITORING PANEL</b> .....	109
<b>SHORE POWER INLET - BATTERY CHARGER</b> .....	109
<b>OUTLETS AND CIRCUITS</b> .....	109
<b>INVERTER</b> .....	109
<b>INVERTER BATTERY SUPPLY</b> .....	110
<b>INVERTER BATTERY SUPPLY - VSR</b> .....	110
<b>SHORE POWER INLET - INVERTER</b> .....	110
<b>LINE VOLTAGE ELECTRICAL SYSTEM</b> .....	111
<b>GENERAL REQUIREMENTS</b> .....	111
<b>120/240 VAC SCENE LIGHTING</b> .....	119
<b>SIDE UPPER RECESSED SCENE LIGHTS</b> .....	119
<b>COMMAND LIGHT TOWER - PRE-WIRE</b> .....	119

# SVI Trucks

<b>PRE-WIRE COMMAND CAMERA SYSTEM</b> .....	124
<b>PRE-WIRE TELESCOPING PNEUMATIC MAST</b> .....	124
<b>MAST MOUNTING - EXTERNAL</b> .....	124
<b>EQUIPMENT PAYLOAD WEIGHT ALLOWANCE</b> .....	125
<b>EQUIPMENT</b> .....	126
<b>REMAINING NFPA MINOR EQUIPMENT BY PURCHASER</b> .....	126

Safety signs with text shall conform to the general principles of ANSI/NEMA Z535.4, *Product Safety Signs and Labels*. Safety signs without text shall conform to the general principles for two-panel safety signs of ISO 9244, *Earth-moving machinery — Machine safety labels — General principles*.

Apparatus built for sale in the United States shall employ safety signage that complies with ANSI/NEMA Z535.4.

Apparatus built for sale outside the United States shall employ safety signage that complies with either ANSI/NEMA Z535.4 or ISO 9244.

Safety signs referenced in this standard beginning with the letters FAMA shall conform to the text and graphics of the referenced safety sign number found in FAMA TC010, *Standard Product Safety Sign Catalog for Automotive Fire Apparatus*.

## **CONTROLS AND INSTRUCTIONS**

Illumination shall be provided for controls, switches, instruction plates, labels, gauges, and instruments necessary for the operation of the apparatus and the equipment provided on it.

If external illumination is provided, it shall be a minimum of 5 fc (50 lx) on the face of the device.

If internal illumination is provided, it shall be a minimum of 4 footlamberts (14 cd/m<sup>2</sup>).

All required signs, instruction plates and labels shall be permanent in nature and securely attached and shall meet the requirements of NFPA and UL 969, *Standard for Marking and Labeling Systems*.

The signs, instruction plates, and labels shall have resistance to damage from temperatures between –30°F and 176°F (–35°C and 80°C) and exposure to oil, fuel, water, hydraulic fluids or other fluids used on the apparatus.

The exterior mounted labels relating to safety or critical operational instructions shall be reflective or illuminated as required by NFPA.

The centerline of any gauge or visual display required by this standard shall be no more than 84 in. (2130 mm) above the level where the operator stands to read the instrument.

The central midpoint or centerline of any control shall be no more than 72 in. (1830 mm) vertically above the ground or platform that is designed to serve as the operator's standing position.

## **COMPONENT PROTECTION**

Hydraulic hose lines, air system tubing, control cords and electrical harnesses shall be mechanically attached to

# SVI Trucks

the frame or body structure of the apparatus with protective looms, grommets or other devices at each point where they pass through body panels or structural members or wherever they lie against a sharp metal edge.

A through-the-frame connector shall be permitted to be used in place of protective looms or grommets.

## **VEHICLE STABILITY SUPPLIED WITH CAB/CHASSIS**

The cab/chassis shall be equipped with a stability control system. The system shall have, at a minimum, a steering wheel position sensor, a vehicle yaw sensor, a lateral accelerometer and individual wheel brake controls.

## **FIRE APPARATUS PERFORMANCE**

The fire apparatus shall meet the requirements of this standard at elevations of 2000 ft (600 m) above sea level.

The fire apparatus shall meet all the requirements of this standard while stationary on a grade of 6 percent in any direction.

The fire apparatus shall meet the requirements of this standard in ambient temperature conditions between 32°F (0°C) and 110°F (43°C).

## **HIGHWAY PERFORMANCE**

The apparatus, when loaded to its estimated in-service weight, shall be capable of the following performance while on dry, paved roads that are in good condition:

- 1) Accelerating from 0 to 35 mph (55 km/hr) within 25 seconds on a 0 percent grade
- 2) Attaining a speed of 50 mph (80 km/hr) on a 0 percent grade
- 3) Maintaining a speed of at least 20 mph (32 km/hr) on any grade up to and including 6 percent

The maximum top speed of fire apparatus with a GVWR over 26,000 lb (11,800 kg) shall not exceed either 68 mph (109 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

If the combined water tank and foam agent tank capacities on the fire apparatus exceed 1250 gal (4732 L), or the GVWR of the vehicle is over 50,000 lb (22,680 kg), the maximum top speed of the apparatus shall not exceed either 60 mph (95 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

## **SERVICEABILITY**

The fire apparatus shall be designed to allow the manufacturer's recommended routine maintenance checks of lubricant and fluid levels to be performed by the operator without lifting the cab of a tilt-cab apparatus or without the need for hand tools.

Where special tools are required for routine service on any component of the apparatus, such tools shall be provided with the apparatus.

Apparatus components that interfere with repair or removal of other major components shall be attached with fasteners, such as cap screws and nuts, so that the components can be removed and installed with ordinary hand tools. These components shall not be welded or otherwise permanently secured into place.

# SVI Trucks

## **FIRE APPARATUS DOCUMENTATION**

The contractor shall supply, at the time of delivery, at least one (1) copy of the following documents:

- 1) The manufacturers record of apparatus construction details, including the following documents:
  - b) Owner's name and address
  - c) Apparatus manufacturer, model, and serial number
  - d) Chassis make, model, and serial number
  - e) GAWR of front and rear axles and GVWR
  - f) Front tire size and total rated capacity in pounds (kilograms)
  - g) Rear tire size and total rated capacity in pounds (kilograms)
  - h) Chassis weight distribution in pounds (kilograms) with water and manufacturer-mounted equipment (front and rear)
  - i) Engine make, model, serial number, rated horsepower and related speed, and governed speed; and if so equipped, engine transmission PTO(s) make, model, and gear ratio
  - j) Type of fuel and fuel tank capacity
  - k) Electrical system voltage and alternator output in amps
  - l) Battery make, model, and capacity in cold cranking amps (CCA)
  - m) Chassis transmission make, model, and serial number; and if so equipped, chassis transmission PTO(s) make, model, and gear ratio
  - n) Ratios of all driving axles
  - o) Maximum governed road speed
  - p) Pump make, model, rated capacity in gallons per minute (liters per minute where applicable), maximum discharge pressure capability rating, and serial number
  - q) Pump transmission make, model, serial number, and gear ratio
  - r) Auxiliary pump make, model, rated capacity in gallons per minute (liters per minute where applicable), and serial number
  - s) Water tank certified capacity in gallons or liters
  - t) Foam tank (if provided) certified capacity in gallons (liters)
  - u) Aerial device type, rated vertical height in feet (meters), rated horizontal reach in feet (meters), and rated capacity in pounds (kilograms)
  - v) Paint manufacturer and paint number(s)
  - w) Company name and signature of responsible company representative
  - x) Weight documents from a certified scale showing actual loading on the front axle, rear axle(s), and overall fire apparatus (with the water tank full but without personnel, equipment, and hose)
- 2) Certification of compliance of the optical warning system (*see 13.8.16*)
- 3) Siren manufacturer's certification of the siren (*see 13.9.1.1*)
- 4) Written load analysis and results of the electrical system performance tests (*see 13.14.1 and Section 13.15*)
- 5) Certification of slip resistance of all stepping, standing, and walking surfaces (*see 15.7.4.5*)
- 6) If the apparatus has a fire pump, the pump manufacturer's certification of suction capability (*see 16.2.4.1*)
- 7) If the apparatus is equipped with a fire pump and special conditions are specified by the purchaser, the pump manufacturer's certification of suction capacity under the special conditions (*see 16.2.4.2*)
- 8) If the apparatus has a fire pump, a copy of the apparatus manufacturer's approval for stationary pumping applications (*see 16.3.1*)
- 9) If the apparatus has a fire pump, the engine manufacturer's certified brake horsepower curve for the engine furnished, showing the maximum governed speed (*see 16.3.2.2*)
- 10) If the apparatus has a fire pump, the pump manufacturer's certification of the hydrostatic test (*see 16.5.2.2*)
- 11) If the apparatus has a fire pump with a maximum discharge pressure capability rating that exceeds the hydrostatic test pressure of 16.5.2.1, the pump manufacturer's certification of the hydrodynamic test

# SVI Trucks

- 12) If the apparatus has a fire pump, the certification of inspection and test for the fire pump (see 16.13.1.1.5 or 16.13.1.2.4 as applicable)
- 13) If the apparatus is equipped with an auxiliary pump, the apparatus manufacturer's certification of the hydrostatic test (see Section 17.13)
- 14) When the apparatus is equipped with a water tank, the certification of water tank capacity (see Section 18.6)
- 15) If the apparatus has an aerial device, the certification of inspection and test for the aerial device (see Section 19.24)
- 16) If the apparatus has an aerial device, all the technical information required for inspections to comply with NFPA 1911
- 17) If the apparatus has a foam proportioning system, the foam proportioning system manufacturer's certification of accuracy (see 20.10.4.2) and the final installer's certification the foam proportioning system meets this standard (see 20.11.2)
- 18) If the system has a CAFS, the documentation of the manufacturer's pre delivery tests (see Section 21.9)
- 19) If the apparatus has a line voltage power source, the certification of the test for the power source (see 22.15.7.2)
- 20) If the apparatus is equipped with an air system, air tank certificates (see 24.5.1.2), the SCBA fill station certification (see 24.9.6), and the results of the testing of the air system installation (see 24.14.5 and 24.15.4)
- 21) Any other required manufacturer test data or reports

## **OPERATIONS AND SERVICE DOCUMENTATION**

The contractor shall deliver with the fire apparatus complete operation and service documentation covering the completed apparatus as delivered and accepted.

The documentation shall address at least the inspection, service, and operations of the fire apparatus and all major components thereof.

The contractor shall also deliver with the fire apparatus the following documentation for the entire apparatus and each major operating system or major component of the apparatus:

- 1) Manufacturer's name and address
- 2) Country of manufacture
- 3) Source for service and technical information
- 4) Parts replacement information
- 5) Descriptions, specifications, and ratings of the chassis, pump (if applicable), and aerial device (if applicable)
- 6) Wiring diagrams for low voltage and line voltage systems to include the following information:
  - a) Pictorial representations of circuit logic for all electrical components and wiring
  - b) Circuit identification
  - c) Connector pin identification
  - d) Zone location of electrical components
  - e) Safety interlocks
  - f) Alternator–battery power distribution circuits
  - g) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems
- 7) Lubrication charts
- 8) Operating instructions for the chassis, any major components such as a pump or aerial device, and any auxiliary systems
- 9) Precautions related to multiple configurations of aerial devices, if applicable
- 10) Instructions regarding the frequency and procedure for recommended maintenance
- 11) Overall apparatus operating instructions
- 12) Safety considerations
- 13) Limitations of use
- 14) Inspection procedures

# SVI Trucks

- 15) Recommended service procedures
- 16) Troubleshooting guide
- 17) Apparatus body, chassis and other component manufacturer's warranties
- 18) Special data required by this standard
- 19) A material safety data sheet (MSDS) for any fluid that is specified for use on the apparatus
- 20) One copy of the latest edition of FAMA's *Fire Apparatus Safety Guide*

The contractor shall deliver with the apparatus all manufacturer's operations and service documents supplied with components and equipment that are installed or supplied by the contractor.

## **NFPA REQUIRED DOCUMENTATION FORMAT - USB FLASH DRIVE**

The vehicle construction details and the operations and service documentation as required per NFPA 1901 latest edition shall be provided on a USB Flash Drive. These manuals shall be divided into sections for ease of reference. There shall be two (2) USB flash drives provided with the completed vehicle.

## **STATEMENT OF EXCEPTIONS**

The final-stage manufacturer shall deliver with the fire apparatus either a certification that the apparatus fully complies with all requirements of this standard or alternatively, a Statement of Exceptions specifically describing each aspect of the completed apparatus that is not fully compliant with the requirements of this standard at the time of delivery.

The Statement of Exceptions shall contain, for each noncompliant aspect of the apparatus or missing required item, the following information:

- 1) A separate specification of the section of the applicable standard for which compliance is lacking
- 2) A description of the particular aspect of the apparatus that is not in compliance therewith or required equipment that is missing
- 3) A description of the further changes or modifications to the delivered apparatus that must be completed to achieve full compliance
- 4) Identification of the entity that will be responsible for making the necessary post delivery changes or modifications or for supplying and installing any missing required equipment to the apparatus to achieve full compliance with this standard

Prior to or at the time of delivery of the apparatus, the Statement of Exceptions shall be signed by an authorized agent of the entity responsible for final assembly of the apparatus and by an authorized agent of the purchasing entity, indicating mutual understanding and agreement between the parties regarding the substance thereof.

## **CARRYING CAPACITY**

The GAWR and the GCWR or GVWR of the chassis shall be adequate to carry the weight of the completed vehicle when loaded to its estimated in-service weight. The Body Manufacturer shall establish the estimated in service weight during the design of the vehicle

The estimated in-service weight shall include the following:

1. The chassis, body and tank(s)
2. Full fuel, lubricant, and other chassis or component fluid tanks or reservoirs
3. Full water and other agent tanks
4. \*250 lb (114 kg) in each seating position
5. Fixed equipment such as pumps, aerial devices, generators, reels and air systems as installed

# SVI Trucks

6. Ground ladders, suction hose, designed hose load in their hose beds and on their reels
7. An allowance for miscellaneous equipment that is the greatest of the following:
  - h) The values shown in Table 12.1.2
  - i) A purchaser-provided list of equipment to be carried with weights
  - j) A purchaser-specified miscellaneous equipment allowance

The manufacturer shall engineer and design the fire apparatus such that the completed apparatus, when loaded to its estimated in-service weight, with all movable weights distributed as close as is practical to their intended in-service configuration, does not exceed the GVWR.

A final manufacturer's certification of the GVWR or GCWR, along with a certification of each GAWR, shall be supplied on a label affixed to the vehicle.

The fire apparatus manufacturer shall permanently affix a high-visibility label in a location visible to the driver while seated.

The label shall show the height of the completed unequipped fire apparatus in feet and inches (meters), the length of the completed fire apparatus in feet and inches (meters), and the GVWR in tons (metric tons).

Wording on the label shall indicate that the information shown was current when the apparatus was manufactured and that, if the overall height changes while the vehicle is in service, the fire department must revise that dimension on the plate.

Apparatus Type	Equip. Storage Area	Apparatus Size	Equipment Allowance	
			lb.	kg.
Special Service Fire Apparatus	Minimum of 120 cu ft (3.4 cu mt) of enclosed compartmentation.	10,000 lb to 15,000 lb (4,500 kg to 7,000 kg) GVWR	2,000	910
		15,001 lb to 20,000 lb (7,001 kg to 9,000 kg) GVWR	2,500	1,135
		20,001 lb to 30,000 lb (9,001 kg to 14,000 kg) GVWR	3,000	1,350
		30,001 lb to 40,000 lb (14,001 kg to 18,000 kg) GVWR	4,000	1,800
		40,001 lb to 50,000 lb (18,001 kg to 23,000 kg) GVWR	6,000	2,700
		50,001 lb to 60,000 lb (23,001 kg to 27,000 kg) GVWR	8,000	3,600
		60,001 lb and up (27,001 kg) GVWR	10,000	4,500

## TESTING

# SVI Trucks

## **ROAD TEST**

Road test shall be conducted in accordance with this section to verify that the completed apparatus is capable of compliance with Roadability Section.

The tests shall be conducted at a location and in a manner that does not violate local, state or provincial or federal traffic laws.

The tests shall be conducted on dry, level, paved roads that are in good condition. The apparatus shall be loaded to its estimated in service weight.

The engine shall not operate in excess of the maximum governed speed. Acceleration tests shall consist of two runs in opposite directions over the same route. The fire apparatus shall attain a speed of 35 mph (55 km/hr) from a standing start within 25 seconds. The fire apparatus shall attain a minimum top speed of 50 mph (80 km/hr).

If the apparatus is equipped with an auxiliary braking system, the Body Manufacturer shall road test the system to confirm that the system is functioning as intended by the auxiliary braking system manufacturer.

If the apparatus is equipped with an air brake system, the service brakes shall bring the apparatus, when loaded to its GVWR, to a complete stop from an initial speed of 20 mph (32.2 km/hr) in a distance not exceeding 35 ft (10.7 m) by actual measurement on a paved, level, dry surface road that is free of loose material, oil or grease.

If the apparatus is equipped with a hydraulic brake system, the service brakes shall bring the apparatus, when loaded to its GVWR, to a complete stop from an initial speed of 30 mph (48.2 km/hr) in a distance not exceeding 88 ft (26.8 m) by actual measurement on a paved, level, dry surface road that is free of loose material, oil or grease.

## **LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST**

The vehicles low voltage electrical system shall be tested and certified by the manufacturer. The certified test results shall be delivered with the completed vehicle. Tests shall be performed when the air temperature is between 0°F and 110°F (-18°C and 43°C).

## **TEST SEQUENCE**

The following three (3) tests shall be performed in the order in which they appear below. Before each test, the batteries shall be fully charged until the voltage stabilizes at the voltage regulator set point and the lowest charge current is maintained for ten (10) minutes. Failure of any of these tests shall require a repeat of the sequence.

### **1. RESERVE CAPACITY TEST**

The engine shall be started and kept running until the engine and engine compartment temperatures are stabilized at normal operating temperatures and the battery system is fully charged. The engine shall be shut off and the minimum continuous electrical load shall be activated for ten (10) minutes.

All electrical loads shall be turned off prior to attempting to restart the engine. The battery system shall then be capable of restarting the engine. Failure to restart the engine shall be considered a test failure of the battery system.

### **2. ALTERNATOR PERFORMANCE TEST**

# SVI Trucks

## **TEST AT IDLE**

The minimum continuous electrical load shall be activated with the engine running at idle speed. The engine temperature shall be stabilized at normal operating temperature. The battery system shall be tested to detect the presence of battery discharge current. The detection of battery discharge current shall be considered a test failure.

## **TEST AT FULL LOAD**

The total continuous electrical load shall be activated with the engine running up to the engine manufacturer's governed speed. The test duration shall be a minimum of two (2) hours. Activation of the load management system shall be permitted during this test.

An alarm sounded by excessive battery discharge, as detected by the warning system required in 13.3.4, or a system voltage of less than 11.8 V dc for a 12 V nominal system, 23.6 V dc for a 24 V nominal system, or 35.4 V dc for a 42 V nominal system for more than 120 seconds shall be considered a test failure.

## **3. LOW VOLTAGE ALARM TEST**

The following test shall be started with the engine off and the battery voltage at or above 12 V for a 12 V nominal system, 24 V for a 24 V nominal system or 36 V for a 42 V nominal system.

With the engine shut off, the total continuous electrical load shall be activated and shall continue to be applied until the excessive battery discharge alarm activates. The battery voltage shall be measured at the battery terminals.

The test shall be considered a failure if the alarm does not sound in less than 140 seconds after the voltage drops to 11.70 V for a 12 V nominal system, 23.4 V dc for a 24 V nominal system, or 35.1 V for a 42 V nominal system.

The battery system shall then be able to restart the engine. Failure to restart the engine shall be considered a test failure.

## **LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST**

### **DOCUMENTATION**

The manufacturer shall deliver the following with the fire apparatus:

- 1) Documentation of the electrical system performance tests
- 2) A written electrical load analysis, including the following:
  - a) The nameplate rating of the alternator
  - b) The alternator rating
  - c) Each of the component loads specified that make up the minimum continuous electrical load
  - d) Additional electrical loads that, when added to the minimum continuous electrical load, determine the total continuous electrical load
  - e) Each individual intermittent electrical load

### **UL 120/240 VAC CERTIFICATION**

The 120/240 volt electrical system shall be third-party, independent, audit-certified through Underwriters Laboratory (UL) to the current edition of NFPA 1901 to perform as listed below;

# SVI Trucks

The prime mover shall be started from a cold start condition, and the unloaded voltage and frequency shall be recorded.

The line voltage electrical system shall be loaded to at least 100% of the continuous rated wattage stated on the power source specification label. Testing with a resistive load bank shall be permitted.

The power source shall be operated in the manner specified by the apparatus manufacturer as documented on instruction plates or in operation manuals. The power source shall be operated at a minimum of 100% of the continuous rated wattage as stated on the power source specification label for a minimum of two (2) hours.

The load shall be adjusted to maintain the output wattage at or above the continuous rated wattage during the entire 2-hour test.

The following conditions shall be recorded at least every 1/2 hour during the test:

- 1) The power source output voltage, frequency and amperes
- 2) The prime mover's oil pressure, water temperature and transmission temperature, if applicable
- 3) The power source hydraulic fluid temperature, if applicable
- 4) The ambient temperature and power source air inlet temperature

The following conditions shall be recorded once during the test for power sources driven by dedicated auxiliary internal combustion engines:

- 1) Altitude
- 2) Barometric pressure
- 3) Relative humidity

If the generator is driven by the chassis engine and the generator allows for operation at variable speeds, the chassis engine speed shall be reduced to the lowest rpm allowed for generator operation and the voltage and frequency shall be recorded.

The load shall be removed and the unloaded voltage and frequency shall be recorded.

Voltage shall be maintained within  $\pm 10\%$  of the voltage stated on the power source specification label during the entire test. Frequency shall be maintained within  $\pm 3$  Hz of the frequency stated on the power source specification label during the entire test.

The total continuous electrical loads, excluding those loads associated with the equipment defined in NFPA 22.15.7.3.11.2, shall be applied during the testing unless an auxiliary engine drives the power source.

If the apparatus is equipped with a fire pump, the 2-hour certification test of the power source shall be completed with the fire pump pumping at 100% capacity at 150 psi (1000 kPa) net pump pressure. The test shall be permitted to be run concurrently with the pump certification test.

## **DOCUMENTATION**

The Body Manufacturer shall deliver the following with the fire apparatus:

The results of each test shall be recorded on an appropriate form and provided with the delivery of the fire apparatus.

# SVI Trucks

## **DIELECTRIC VOLTAGE WITHSTAND TEST**

The line voltage wiring and permanently connected devices and equipment shall be subjected to a dielectric voltage withstand test of 900 volts for one (1) minute. The testing shall be performed after all body work has been completed.

The test shall be conducted as follows:

- 1) Isolate the power source from the panel board and disconnect any solid state low voltage components
- 2) Connect one lead of the dielectric tester to all the hot and neutral buses tied together
- 3) Connect the other lead to the fire apparatus frame or body
- 4) Close any switches and circuit breakers in the circuit(s)
- 5) Apply the dielectric voltage for one (1) minute in accordance with the testing equipment manufacturer's instructions

The electrical polarity of all permanently wired equipment, cord reels and receptacles shall be tested to verify that wiring connections have been properly made.

Electrical continuity shall be verified from the chassis or body to all line voltage electrical enclosures, light housings, motor housings, light poles, switch boxes and receptacle ground connections that are accessible to fire fighters in normal operations.

If the apparatus is equipped with a transfer switch, it shall be tested to verify operation and that all non grounded conductors are switched.

Electrical light towers, floodlights, motors, fixed appliances and portable generators shall be operated at their full rating or capacity for 30 minutes to ensure proper operation.

## **PERFORMANCE BOND**

The successful Bidder will be required to provide a 100% performance bond in the amount equivalent to the total amount of its bid including any additional options that may have been given. Performance bond shall be provided within two (2) weeks after notice of award.

If the Bidder to whom the contract is awarded, refuses or neglects to execute or fails to furnish the required 100% performance bond within two (2) weeks after notice, the amount of his deposit may be forfeited and retained by the Henderson Fire Department as liquidated damages.

The terms of the performance bond shall continue one (1) year after completion and delivery of the apparatus. The balance of any warranty, if greater than 12 months, shall continue to be guaranteed solely by Contractor.

## **WARRANTY**

A full statement shall be provided of the warranties for the vehicle(s) being bid. Warranties should clearly describe the terms under which the vehicle manufacturer accepts responsibility for the cost to repair defects caused by faulty design, quality of work or material and for the applicable period of time after delivery.

Cost of repairs refers to all costs related thereto including, but not limited to, the cost of materials and the cost of labor.

The Body Manufacturer shall warrant all materials and accessories used on the vehicle(s), whether fabricated by

# SVI Trucks

manufacturer or purchased from an outside source and will deal directly with the Henderson Fire Department on all warranty work.

## **GENERAL LIMITED WARRANTY - TWO (2) YEARS**

The vehicle shall be free of defects in material and workmanship for a period of two (2) years or 36,000 miles (or 57,936 kilometers), whichever occurs first starting thirty (30) days after the original invoice date.

The Contractor must be the "single source" coordinator of all warranties on the vehicle.

## **LOW VOLTAGE ELECTRICAL WARRANTY - FIVE (5) YEARS**

The vehicle low voltage electrical system shall be free of defects in material and workmanship for a period of five (5) years or 60,000 miles (or 96,561 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

## **STRUCTURAL WARRANTY - TEN (10) YEARS**

The body shall be free of structural or design failure or workmanship for a period of ten (10) years, or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

## **UNDERCOAT WARRANTY**

The body undercoating shall have a warranty provided by the manufacturer for the lifetime of the vehicle or twenty (20) years, whichever occurs first. The warranty shall be transferable between vehicle owners. Should the undercoating material applied to the underside of the body and wheel wells of the vehicle ever flake off, peel, chip or crack due to drying out, the damaged area shall be re-sprayed without charge to the vehicle owner.

## **PAINT LIMITED WARRANTY - TEN (10) YEARS**

The body shall be free of bubbling or peeling as a result of a defect in the method of manufacture for a period of ten (10) years or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date. **Pro-rated warranties will not be acceptable.**

## **GRAPHICS LIMITED WARRANTY**

The 3M graphics installation shall be warranted for a period of two (2) years. The 3M materials installed on completed vehicle shall be warranted for seven (7) years. The 3M Diamond grade film (if specified) shall be warranted for ten (10) years.

## **CONSTRUCTION PERIOD**

The completed vehicle shall be delivered within three hundred sixty (360) days after receipt of a purchase order or contract.

Contractor shall not be held liable for delays of chassis delivery due to accidents, strikes, floods or other events not subject to their control. Contractor shall provide immediate written notice to Henderson Fire Department as to delays and to what extent these delays have in completing vehicle within the stated construction time period.

## **OVERALL HEIGHT REQUIREMENT**

# SVI Trucks

There is no overall height (OAH) restriction for this vehicle.

## **OVERALL LENGTH REQUIREMENT**

There is no overall length (OAL) restriction for this vehicle.

## **OVERALL WIDTH**

The overall width (OAW) of the body at drip rails shall be 102" (8' - 6"), and body shall be 100" (8' - 4").

## **ANGLE OF APPROACH**

The angle of approach for this vehicle shall not be less than eight (8) degrees when it is loaded to the estimated in-service weight as specified by the current edition of NFPA 1901.

## **ANGLE OF DEPARTURE**

The angle of departure for this vehicle shall not be less than eight (8) degrees when it is loaded to the estimated in-service weight as specified by the current edition of NFPA 1901.

## **DELIVERY AND DEMONSTRATION**

The Contractor shall be responsible for the delivery of the completed unit to the Henderson Fire Department's location. On initial delivery of the apparatus, the Contractor shall supply a qualified representative to demonstrate the apparatus and provide initial instruction to representatives of the Henderson Fire Department regarding the operation, care and maintenance of the apparatus and equipment supplied at Henderson Fire Department location.

The Delivery Engineer shall set delivery and instruction schedule with the person appointed by Henderson Fire Department.

After delivery of the apparatus, the Henderson Fire Department shall be responsible for ongoing training of its personnel to proficiency regarding the proper and safe use of the apparatus and associated equipment.

## **MODEL**

The chassis shall be a Metro Star model. The cab and chassis shall include design considerations for multiple emergency vehicle applications, rapid transit and maneuverability. The chassis shall be manufactured for heavy duty service with the strength and capacity to support a fully laden apparatus, one hundred (100) percent of the time.

## **MODEL YEAR**

The chassis shall have a vehicle identification number that reflects a 2017 model year.

## **COUNTRY OF SERVICE**

The chassis shall be put in service in the country of United States of America (USA).

The chassis will meet applicable U.S.A. federal motor vehicle safety standards per CFR Title 49 Chapter V Part 571 as clarified in the incomplete vehicle book per CFR Title 49 Chapter V Part 568 Section 4 which accompanies each chassis. Spartan Chassis is not responsible for compliance to state, regional, or local regulations. Dealers

# SVI Trucks

should identify those regulations and order any necessary optional equipment from Spartan Chassis or their OEM needed to be in compliance with those regulations.

## **CAB AND CHASSIS LABELING LANGUAGE**

The cab and chassis shall include the applicable caution, warning, and safety notice labels with text to be written in English.

## **APPARATUS TYPE**

The apparatus shall be a rescue vehicle designed for emergency service use which shall include the functions of a multipurpose vehicle which primarily provides support services at emergency scenes.

## **VEHICLE TYPE**

The chassis shall be manufactured for use as a straight truck type vehicle and designed for the installation of a permanently mounted apparatus behind the cab. The apparatus of the vehicle shall be supplied and installed by the apparatus manufacturer.

## **AXLE CONFIGURATION**

The chassis shall feature a 4 x 2 axle configuration consisting of a single rear drive axle with a single front steer axle.

## **GROSS AXLE WEIGHT RATINGS FRONT**

The front gross axle weight rating (GAWR) of the chassis shall be 21,500 pounds.

This front gross axle weight rating shall be adequate to carry the weight of the completed apparatus including all equipment and personnel.

## **GROSS AXLE WEIGHT RATINGS REAR**

The rear gross axle weight rating (GAWR) of the chassis shall be 24,000 pounds.

This rear gross axle weight rating shall be adequate to carry the weight of the completed apparatus including all equipment and personnel.

## **CAB STYLE**

The cab shall be a custom, fully enclosed, ELFD model with a 24.00 inch raised roof over the driver, officer, and crew area, designed and built specifically for use as an emergency response vehicle by a company specializing in cab and chassis design for all emergency response applications. The cab shall be designed for heavy-duty service utilizing superior strength and capacity for the application of protecting the occupants of the vehicle. This style of cab shall offer up to ten (10) seating positions.

The cab shall incorporate a fully enclosed design with side wall roof supports, allowing for a spacious cab area with no partition between the front and rear sections of the cab. To provide a superior finish by reducing welds that fatigue cab metal; the roof, the rear wall and side wall panels shall be assembled using a combination of welds and proven industrial adhesives designed specifically for aluminum fabrication for construction.

# SVI Trucks

The cab shall be constructed using multiple aluminum extrusions in conjunction with aluminum plate, which shall provide proven strength and the truest, flattest body surfaces ensuring less expensive paint repairs if needed. All aluminum welding shall be completed to the American Welding Society and ANSI D1.2-96 requirements for structural welding of aluminum.

All interior and exterior seams shall be sealed for optimum noise reduction and to provide the most favorable efficiency for heating and cooling retention.

The cab shall be constructed of 5052-H32 corrosion resistant aluminum plate. The cab shall incorporate tongue and groove fitted 6061-T6 0.13 & 0.19 inch thick aluminum extrusions for extreme duty situations. A single formed, one (1) piece extrusion shall be used for the "A" pillar, adding strength and rigidity to the cab as well as additional roll-over protection. The cab side walls and lower roof skin shall be 0.13 inch thick; the rear wall and raised roof skins shall be 0.09 inch thick; the front cab structure shall be 0.19 inch thick.

The exterior width of the cab shall be 94.00 inches wide with a minimum interior width of 88.00 inches. The overall cab length shall be 151.10 inches with 74.00 inches from the centerline of the front of the axle to the back of the cab.

The cab interior shall be designed to afford the maximum usable interior space and attention to ergonomics with hip and legroom while seated which exceeds industry standards. The crew cab floor shall be flat across the entire walking area for ease of movement inside the cab.

The cab shall offer an interior height of 57.50 inches from the front floor to the headliner and a rear floor to headliner height of 79.00 inches in the raised roof area, at a minimum. The cab shall offer an interior measurement at the floor level from the rear of the engine tunnel to the rear wall of the cab of 71.88 inches. All interior measurements shall include the area within the interior trimmed surfaces and not to any unfinished surface.

The cab shall include a driver and officer area with two (2) cab doors large enough for personnel in full firefighting gear. The front doors shall offer a clear opening of 40.25 inches wide X 53.50 inches high, from the cab floor to the top of the door opening. The cab shall also include a crew area with up to two (2) cab doors, also large enough for personnel in full firefighting gear. The rear doors shall offer a clear opening of 32.25 inches wide X 71.00 inches high, from the cab floor to the top of the door opening.

The cab shall incorporate a progressive two (2) step configuration from the ground to the cab floor at each door opening. The progressive steps are vertically staggered and extend the full width of each step well allowing personnel in full firefighting gear to enter and exit the cab easily and safely.

The first step for the driver and officer area shall measure approximately 11.50 inches deep X 31.13 inches wide. The intermediate step shall measure approximately 8.50 inches deep X 32.50 inches wide. The height from the first step to the intermediate step and the intermediate step to the cab floor shall not exceed 11.00 inches.

The first step for the crew area shall measure approximately 11.50 inches deep X 20.44 inches wide. The intermediate step shall measure approximately 10.25 inches deep X 22.75 inches wide. The height from the first step to the intermediate step and the intermediate step to the cab floor shall not exceed 12.80 inches.

## **CAB FRONT FASCIA**

The front cab fascia shall be constructed of 5052-H32 Marine Grade, 0.13 of an inch thick aluminum plate which shall be an integral part of the cab.

The cab fascia will encompass the entire front of the aluminum cab structure from the bottom of the windshield to the bottom of the cab and shall be the "Classic" design.

# SVI Trucks

The front cab fascia shall include two (2) molded plastic modules on each side accommodating a total of up to four (4) Hi/Low beam headlights and two (2) turn signal lights or up to four (4) warning lights. A chrome plated molded plastic bezel shall be provided on each side around each set of four lamps.

## **FRONT GRILLE**

The front fascia shall include a box style, 304 stainless steel front grille 44.45 inches wide X 33.50 inches high X 1.50 inches deep. The grille shall include a minimum free air intake of 732.00 square inches. The upper portion of the grille shall be hinged to provide service access behind the grille.

## **CAB UNDERCOAT**

There shall be a rubberized undercoating applied to the underside of the cab that provides abrasion protection, sound deadening and corrosion protection.

## **CAB SIDE DRIP RAIL**

There shall be a drip rail along the top radius of each cab side. The drip rails shall help prevent water from the cab roof running down the cab side.

## **CAB PAINT EXTERIOR**

The cab shall be painted prior to the installation of glass accessories and all other cab trim to ensure complete paint coverage and the maximum in corrosion protection of all metal surfaces.

All metal surfaces on the entire cab shall be ground by disc to remove any surface oxidation or surface debris which may hinder the paint adhesion. Once the surface is machine ground a high quality acid etching of base primer shall be applied. Upon the application of body fillers and their preparation, the cab shall be primed with a coating designed for corrosion resistance and surface paint adhesion. The maximum thickness of the primer coat shall be 2.00 mils.

The entire cab shall then be coated with an intermediate solid or epoxy surfacing agent that is designed to fill any minor surface defects, provide an adhesive bond between the primer and the paint and improve the color and gloss retention of the color. The finish to this procedure shall be a sanding of the cab with 360 grit paper followed by sealing the seams with SEM brand seam sealer.

The cab shall then be painted the specific color designated by the customer with an acrylic urethane type system designed to retain color and resist acid rain and most atmospheric chemicals found on the fire ground or emergency scene. The paint shall have a minimum thickness of 2.00 mils, followed by a clear top coat not to exceed 2.00 mils. The entire cab shall then be baked at 180 degrees for one (1) hour to speed the curing process of the coatings.

## **CAB PAINT MANUFACTURER**

The cab shall be painted with PPG Industries paint.

## **CAB PAINT PRIMARY/LOWER COLOR**

The primary/lower paint color shall be:

## **CAB PAINT WARRANTY**

# SVI Trucks

The cab and chassis shall be covered by a limited manufacturer paint warranty which shall be in effect for ten (10) years from the first owner's date of purchase or in service or the first 100,000 actual miles, whichever occurs first.

## **CAB PAINT INTERIOR**

The visible interior cab structure surfaces shall be painted with a multi-tone onyx black texture finish.

## **CAB ENTRY DOORS**

The cab shall include three (3) entry doors, two (2) front doors and one (1) crew on the right side of the cab designed for ease of entering and egress when outfitted with an SCBA. The doors shall be constructed of extruded aluminum with a nominal thickness of 0.13 inch. The exterior skins shall be constructed of 0.13 inch aluminum plate.

The doors shall include a double rolled style automotive rubber seal around the perimeter of each door frame and door edge which ensures a weather tight fit.

All door hinges shall be hidden within flush mounted cab doors for a pleasing smooth appearance and perfect fit along each side of the cab. Each door hinge shall be piano style with a 0.38 inch pin and shall be constructed of stainless steel.

## **CAB ENTRY DOOR TYPE**

All cab entry doors shall be full length in design to fully enclose the lower cab steps.

## **CAB INSULATION**

The cab ceiling and walls shall include 1.00 inch thick foam insulation. The insulation shall act as a barrier absorbing noise as well as assisting in sustaining the desired climate within the cab interior.

## **LH EXTERIOR REAR COMPARTMENT**

The cab shall offer an exterior compartment on the left side of the cab behind the rear door. The compartment opening shall be 17.00 inches wide X 21.19 inches high. The compartment size shall be 17.34 inches wide X 21.19 inches high X 21.19 inches deep. The compartment shall have a 16.63 inch wide, 32.00 inch high and 1.50 inch thick hinged box pan style flush mount door with a bright aluminum tread plate inner panel and a bent D-ring slam latch. There shall be a switch to activate a light inside the compartment and the open compartment warning light in the cab in the event the door is left ajar.

## **LEFT HAND EXTERIOR REAR COMPARTMENT LIGHTING**

There shall be one (1) SoundOff Signal brand LED strip light installed to illuminate the exterior rear compartment on the left side of the cab. The strip light shall be 10.00 inches long and shall include three (3) bright white Gen3 LEDs.

## **LH EXTERIOR COMPARTMENT INTERIOR FINISH**

The interior of the left hand exterior compartment shall have a DA sanded finish.

## **RH EXTERIOR REAR COMPARTMENT**

# SVI Trucks

The cab shall offer an exterior compartment on the right side of the cab behind the rear door. The compartment opening shall be 17.00 inches wide X 21.19 inches high. The compartment size shall be 17.34 inches wide X 21.19 inches high X 21.19 inches deep. The compartment shall have a 16.63 inch wide, 32.00 inch high and 1.50 inch thick hinged box pan style flush mount door with a bright aluminum tread plate inner panel and a bent D-ring slam latch. There shall be a switch to activate a light inside the compartment and the open compartment warning light in the cab in the event the door is left ajar.

## **RIGHT HAND EXTERIOR REAR COMPARTMENT LIGHTING**

There shall be one (1) SoundOff Signal brand LED strip light installed to illuminate the exterior rear compartment on the right side of the cab. The strip light shall be 10.00 inches long and shall include three (3) bright white Gen3 LEDs.

## **RH EXTERIOR COMPARTMENT INTERIOR FINISH**

The interior of the right hand exterior compartment shall have a DA sanded finish.

## **CAB STRUCTURAL WARRANTY**

Summary of Warranty Terms:

THE FOLLOWING IS SUMMARY OF WARRANTY TERMS FOR INFORMATION ONLY. THE ACTUAL LIMITED WARRANTY DOCUMENT, WHICH IS ATTACHED TO THIS OPTION, CONTAINS THE COMPLETE STATEMENT OF THE SPARTAN MOTORS USA LIMITED WARRANTY. SPARTAN'S RESPONSIBILITY IS TO BE ACCORDING TO THE TERMS OF THE COMPLETE LIMITED WARRANTY DOCUMENT.

The cab structure shall be warranted for a period of ten (10) years or one hundred thousand (100,000) miles which ever may occur first. The warranty period shall commence on the date the vehicle is delivered to the first end user.

## **CAB TEST INFORMATION**

The cab shall have successfully completed the preload side impact, static roof load application and frontal impact without encroachment to the occupant survival space when tested in accordance with Section 4 of SAE J2420 COE Frontal Strength Evaluation Dynamic Loading Heavy Trucks, Section 5 of SAE J2422 Cab Roof Strength Evaluation Quasi –Static Loading Heavy Trucks and ECE R29 Uniform Provisions Concerning the Approval of Vehicles with regard to the Protection of the Occupants of the Cab of a Commercial Vehicles Annex 3 Paragraph 5.

The above tests have been witnessed by and attested to by an independent third party. The test results were recorded using cameras, high speed imagers, accelerometers and strain gauges. Documentation of the testing shall be provided upon request.

## **ELECTRICAL SYSTEM**

The chassis shall include a single starting electrical system which shall include a 12 volt direct current Weldon brand of multiplexing system, suppressed per SAE J551. The wiring shall be appropriate gauge cross link with 311 degree Fahrenheit insulation. All SAE wires in the chassis shall be color coded and shall include the circuit number and function where possible. The wiring shall be protected by 275 degree Fahrenheit minimum high temperature flame retardant loom. All nodes and sealed Deutsch connectors shall be waterproof.

## **APPARATUS WIRING PROVISION**

# SVI Trucks

An apparatus wiring panel shall be installed in the center dash area behind the rocker switch panel which shall include eight (8) open circuits consisting of three (3) 20 amp, one (1) 30 amp, three (3) 10 amp, and one (1) 15 amp circuit, with relays and breakers with trigger wires which shall be routed to the rocker switch panel.

## **MULTIPLEX DISPLAY**

The multiplex electrical system shall include a Weldon Vista IV display with interactive touchscreen. The display shall be located on the left side of the dash in the switch panel. The Vista IV shall feature a full color LCD display screen which includes a message bar displaying the time of day and important messages requiring acknowledgement by the user which shall all be displayed on the top of the screen in the order they are received. There shall be eight (8) push button virtual controls, four (4) on each side of the display for the on-board diagnostics. The display screen shall be video ready for back-up cameras, thermal cameras, and DVD.

The Vista IV display shall offer varying fonts and background colors. The display shall be fully programmable to the needs of the customer and shall offer virtually infinite flexibility for screen configuration options.

## **DATA RECORDING SYSTEM**

The chassis shall have a Weldon Vehicle Data Recorder (VDR) system installed. The system shall be designed to meet NFPA 1901 and shall be integrated with the Weldon Multiplex electrical system. The following information shall be recorded:

- Vehicle Speed
- Acceleration
- Deceleration
- Engine Speed
- Engine Throttle Position
- ABS Event
- Seat Occupied Status
- Seat Belt Status
- Master Optical Warning Device Switch Position
- Time
- Date

Each portion of the data shall be recorded at the specified intervals and stored for the specified length of time to meet NFPA 1901 guidelines and shall be retrievable by connecting a laptop computer to the VDR system.

## **ACCESSORY POWER**

The electrical distribution panel shall include two (2) power studs. The studs shall be size #10 and each of the power studs shall be circuit protected with a fuse of the specified amperage. One (1) power stud shall be capable of carrying up to a 40 amp battery direct load. One (1) power stud shall be capable of carrying up to a 15 amp ignition switched load. The two (2) power studs shall share one (1) #10 ground stud. A 225 amp battery direct power and ground stud shall be provided and installed on the chassis near the left hand battery box for OEM body connections.

## **EXTERIOR ELECTRICAL TERMINAL COATING**

All terminals exposed to the elements will be sprayed with a high visibility protective rubberized coating to prevent corrosion.

# SVI Trucks

## **ENGINE**

The chassis engine shall be a Cummins ISL9 engine. The ISL9 engine shall be an in-line six (6) cylinder, four cycle diesel powered engine. The engine shall offer a rating of 450 horse power at 2100 RPM and shall be governed at 2200 RPM. The torque rating shall feature 1250 foot pounds of torque at 1400 RPM with 543 cubic inches (8.9 liters) of displacement.

The ISL9 engine shall feature a VGT™ Turbocharger, a high pressure common rail fuel system, fully integrated electronic controls with an electronic governor, and shall be EPA certified to meet the 2013 emissions standards using cooled exhaust gas recirculation and selective catalytic reduction technology.

The engine shall include an engine mounted combination full flow/by-pass oil filter with replaceable spin on cartridge for use with the engine lubrication system. The engine shall include Citgo brand Citgard 500, or equivalent SAE 15W40 CJ4 low ash engine oil which shall be utilized for proper engine lubrication.

A wiring harness shall be supplied ending at the back of the cab. The harness shall include a connector which shall allow an optional harness for the pump panel. The included circuits shall be provided for a tachometer, oil pressure, engine temperature, hand throttle, high idle and a PSG system. A circuit for J1939 data link shall also be provided at the back of the cab.

## **CAB ENGINE TUNNEL**

The cab interior shall include an integrated engine tunnel constructed of 5052-H32 Marine Grade, 0.19 of an inch thick aluminum. The tunnel shall be a maximum of 41.50 inches wide X 25.50 inches high.

## **DIESEL PARTICULATE FILTER CONTROLS**

There shall be two (2) controls for the diesel particulate filter. One (1) control shall be for regeneration and one (1) control shall be for regeneration inhibit.

## **ENGINE PROGRAMMING HIGH IDLE SPEED**

The engine high idle control shall maintain the engine idle at approximately 1250 RPM when engaged.

## **ENGINE HIGH IDLE CONTROL**

The vehicle shall be equipped with an automatic high-idle speed control. It shall be pre-set so when activated, it will operate the engine at the appropriate RPM to increase alternator output. This device shall operate only when the master switch is activated and the transmission is in neutral with the parking brake set. The device shall disengage when the operator depresses the brake pedal, or the transmission is placed in gear, and shall be available to manually or automatically re-engage when the brake is released, or when the transmission is placed in neutral. There shall be an indicator on the Vista display and control screen for the high idle speed control.

## **ENGINE PROGRAMMING ROAD SPEED GOVERNOR**

The engine shall include programming which will govern the top speed of the vehicle.

## **AUXILIARY ENGINE BRAKE**

A compression brake, for the six (6) cylinder engine shall be provided. A cutout relay shall be installed to disable the compression brake when in pump mode or when an ABS event occurs. The engine compression brake shall activate upon 0% accelerator when in operation mode and actuate the vehicle's brake lights.

# SVI Trucks

The engine shall utilize a variable geometry turbo (VGT) as an integrated auxiliary engine brake to offer a variable rate of exhaust flow, which when activated in conjunction with the compression brake shall enhance the engine's compression braking capabilities.

## **AUXILIARY ENGINE BRAKE CONTROL**

An engine compression brake control device shall be included. The electronic control device shall monitor various conditions and shall activate the engine brake only if all of the following conditions are simultaneously detected:

- A valid gear ratio is detected.
- The driver has requested or enabled engine compression brake operation.
- The throttle is at a minimum engine speed position.
- The electronic controller is not presently attempting to execute an electronically controlled final drive gear shift.

The compression brake shall be controlled via an off/low/medium/high virtual button on the Vista display and control screen. The multiplex system shall remember and default to the last engine brake control setting when the vehicle is shut off and re-started.

## **ELECTRONIC ENGINE OIL LEVEL INDICATOR**

The engine oil shall be monitored electronically and shall send a signal to activate a warning in the instrument panel when levels fall below normal. The warning shall activate in a low oil situation upon turning on the master battery and ignition switches without the engine running.

## **FLUID FILLS**

The front of the chassis shall accommodate fluid fill for the engine oil through the grille. This area shall also accommodate a check for the engine oil. The transmission, power steering, and coolant fluid fills and checks shall be under the cab. The windshield washer fill shall be accessible through the front left side mid step.

## **ENGINE DRAIN PLUG**

The engine shall include an original equipment manufacturer installed oil drain plug.

## **ENGINE WARRANTY**

The Cummins engine shall be warranted for a period of five (5) years or 100,000 miles, whichever occurs first.

## **ENGINE PROGRAMMING REMOTE THROTTLE**

The engine ECM (Electronic Control Module) discreet wire remote throttle circuit shall be turned off for use with a J1939 based pump controller or when the discreet wire remote throttle controls are not required.

## **ENGINE PROGRAMMING IDLE SPEED**

The engine low idle speed will be programmed at 700 rpm.

## **ENGINE FAN DRIVE**

The engine cooling system fan shall incorporate a thermostatically controlled, Horton clutched type fan drive.

# SVI Trucks

When the clutched fan is disengaged it shall facilitate improved vehicle performance, cab heating in cold climates, and fuel economy. The fan clutch design shall be fail safe so that if the clutch drive fails the fan shall engage to prevent engine overheating due to the fan clutch failure.

## **ENGINE COOLING SYSTEM**

There shall be a heavy-duty aluminum cooling system designed to meet the demands of the emergency response industry. The cooling system shall have the capacity to keep the engine properly cooled under all conditions of road and pumping operations. The cooling system shall be designed and tested to meet or exceed the requirements specified by the engine and transmission manufacturer and all EPA requirements. The complete cooling system shall be mounted to isolate the entire system from vibration or stress. The individual cores of the cooling system shall be mounted in a manner to allow expansion and contraction at various rates without inducing stress into the adjoining cores.

The cooling system shall utilize a charge air cooler to radiator serial flow package that provides the maximum cooling capacity for the specified engine as well as serviceability. The main components shall include a surge tank, an air to air charge air cooler bolted to the front of the radiator, recirculation shields, a shroud, a fan, and required tubing.

The radiator shall be a down-flow design constructed with aluminum cores, plastic end tanks, and a steel frame. The radiator shall be equipped with a drain cock to drain the coolant for serviceability.

The cooling system shall include a one piece injection molded polymer eleven (11) blade fan with a fiberglass fan shroud.

The cooling system shall be equipped with a surge tank that is capable of removing entrained air from the system. The surge tank shall be equipped with a low coolant probe and sight glass to monitor the level of the coolant. The surge tank shall have a dual seal cap that meets the engine manufacturer's pressure requirements, and allows for expansion and recovery of coolant into a separate integral expansion chamber.

All radiator tubes shall be formed from aluminized steel tubing. Recirculation shields shall be installed where required to prevent heated air from reentering the cooling package and affecting performance.

The charge air cooler shall be a cross-flow design constructed completely of aluminum with cast tanks. All charge air cooler tubes shall be formed from aluminized steel tubing and installed with silicone hump hoses and stainless steel "constant torque" style clamps meeting the engine manufacturer's requirements.

## **ENGINE COOLING SYSTEM PROTECTION**

The engine cooling system shall include a recirculation shield designed to act as a light duty skid plate below the radiator to provide additional protection for the engine cooling system from light impacts, stones, and road debris. The skid plate shall be painted to match the frame color.

## **ENGINE COOLANT**

The cooling package shall include Extended Life Coolant (ELC). The use of ELC provides longer intervals between coolant changes over standard coolants providing improved performance. The coolant shall contain a 50/50 mix of ethylene glycol and de-ionized water to keep the coolant from freezing to a temperature of -34 degrees Fahrenheit.

Proposals offering supplemental coolant additives (SCA) shall not be considered, as this is part of the extended life coolant makeup.

# SVI Trucks

## **ELECTRONIC COOLANT LEVEL INDICATOR**

The instrument panel shall feature a low engine coolant indicator light which shall be located in the center of the instrument panel. An audible tone alarm shall also be provided to warn of a low coolant incident.

## **COOLANT HOSES**

The cooling system hoses shall be silicone heater hose with rubber hoses in the cab interior. The radiator hoses shall be formed silicone coolant hoses with formed aluminized steel tubing. All heater hose, silicone coolant hose, and tubing shall be secured with stainless steel constant torque band clamps.

## **ENGINE COOLANT OVERFLOW BOTTLE**

A remote engine coolant overflow bottle shall be provided in the case of over filling the coolant system. The overflow bottle shall capture the expansion fluid or overflow rather than allow the fluid to drain on the ground. The overflow bottle provided on the cooling system shall only be a catch bottle and shall not return excess coolant back into the surge tank.

## **ENGINE AIR INTAKE**

The engine air intake system shall include an ember separator behind the right side headlamp. This ember separator shall be designed to protect the downstream air filter from embers using a combination of unique flat and crimped metal screens packaged in a heavy duty galvanized steel frame. This multilayered screen shall trap embers and allow them to burn out before passing through the pack.

The engine air intake system shall also include an air cleaner mounted to the frame beneath the cab on the right side of the vehicle. This air cleaner shall utilize a replaceable dry type filter element designed to prevent dust and debris from being ingested into the engine. A service cover shall be provided on the bottom of the housing, reducing the chance of contaminating the air intake system during air filter service.

The air intake system shall include a restriction indicator light in the warning light cluster on the instrument panel, which shall activate when the air cleaner element requires replacement.

## **AIR INTAKE PROTECTION**

A light duty skid plate shall be supplied for the engine air intake system below the right front side of the cab. The skid plate shall provide protection for the air intake system from light impacts, stones, and road debris. The skid plate shall be painted to match the frame color.

## **ENGINE EXHAUST SYSTEM**

The exhaust system shall include a diesel particulate filter (DPF), a diesel oxidation catalyst, and a selective catalytic reduction catalyst (SCR) to meet current EPA standards. The selective catalytic reduction catalyst utilizes a diesel exhaust fluid solution consisting of urea and purified water to convert NOx into nitrogen, water, and trace amounts of carbon dioxide. The solution shall be injected into the system through the decomposition tube between the DPF and SCR.

The system shall utilize 0.07 inch thick stainless steel exhaust tubing between the engine turbo and the DPF. Zero leak clamps seal all system joints between the turbo and DPF.

# SVI Trucks

The DPF, the decomposition tube, and the SCR canister through the end of the tailpipe shall be connected with zero leak clamps. The discharge shall terminate horizontally on the right side of the vehicle ahead of the rear tires.

The exhaust system shall be mounted below the frame in the inboard position with the SCR canister in line rearward of the DPF.

## **DIESEL EXHAUST FLUID TANK**

The exhaust system shall include a molded cross linked polyethylene tank for Diesel Exhaust Fluid (DEF). The tank shall have a capacity of six (6) usable gallons and shall be mounted on the left hand side of the chassis frame behind the batteries below the frame.

The DEF tank shall be designed with capacity for expansion in case of fluid freezing. Engine coolant, which shall be thermostatically controlled, shall be run through lines in the tank to help prevent the DEF from freezing and to provide a means of thawing the fluid if it should become frozen.

The tank fill tube shall be routed under the rear of the cab with the fill neck and splash guard accessible through the lower left side of the three (3) door cab.

## **ENGINE EXHAUST ACCESSORIES**

An exhaust temperature mitigation device shall be shipped loose for installation by the body manufacturer on the vehicle. The temperature mitigation device shall lower the temperature of the exhaust by combining ambient air with the exhaust gasses at the exhaust outlet.

## **ENGINE EXHAUST WRAP**

The exhaust tubing between the engine turbo and the diesel particulate filter (DPF) shall be wrapped with a thermal cover in order to retain the necessary heat for DPF regeneration. The exhaust wrap shall also help protect surrounding components from radiant heat which can be transferred from the exhaust.

## **TRANSMISSION**

The drive train shall include an Allison model EVS 3000 torque converting, automatic transmission which shall include electronic controls. The transmission shall feature two (2) 10-bolt PTO pads located on the converter housing.

The transmission shall include two (2) internal oil filters and Castrol TranSynd™ synthetic TES 295 transmission fluid which shall be utilized in the lubrication of the EVS transmission. An electronic oil level sensor shall be included with the readout located in the shift selector.

The transmission gear ratios shall be:

1st	3.49:1
2nd	1.86:1
3rd	1.41:1
4th	1.00:1
5th	0.75:1
6th	0.65:1 (if applicable)
Rev	5.03:1

## **TRANSMISSION MODE PROGRAMMING**

# SVI Trucks

The transmission, upon start-up, will select a six (6) speed operation without the need to press the mode button.

## **TRANSMISSION FEATURE PROGRAMMING**

The Allison Gen V-E transmission EVS group package number 127 shall contain the 227 vocational package in consideration of the duty of this apparatus for rescue. This package shall incorporate an automatic neutral with selector override. This feature commands the transmission to neutral when the park brake is applied, regardless of drive range requested on the shift selector. This requires re-selecting drive range to shift out of neutral for the override.

A transmission interface connector shall be provided in the cab. This package shall contain the following input/output circuits to the transmission control module. The Gen V-E transmission shall include prognostic diagnostic capabilities. These capabilities shall include the monitoring of the fluid life, filter change indication, and transmission clutch maintenance.

<u>Function ID</u>	<u>Description</u>	<u>Wire assignment</u>
Inputs		
C	PTO Request	143
F	Aux. Function Range Inhibit (Special)	101/142
Outputs		
G	PTO Enable Output (See Input Function C)	130
S	Neutral Indicator for PTO	145
	Signal Return	103

## **ELECTRONIC TRANSMISSION OIL LEVEL INDICATOR**

The transmission fluid shall be monitored electronically and shall send a signal to activate a warning in the instrument panel when levels fall below normal.

## **TRANSMISSION SHIFT SELECTOR**

An Allison pressure sensitive range selector touch pad shall be provided and located to the right of the driver within clear view and easy reach. The shift selector shall have a graphical Vacuum Florescent Display (VFD) capable of displaying two lines of text. The shift selector shall provide mode indication and a prognostic indicator (wrench symbol) on the digital display. The prognostics monitor various operating parameters and shall alert you when a specific maintenance function is required.

## **TRANSMISSION PRE-SELECT WITH AUXILIARY BRAKE**

When the auxiliary brake is engaged, the transmission shall automatically shift to second gear to decrease the rate of speed assisting the secondary braking system and slowing the vehicle.

## **TRANSMISSION COOLING SYSTEM**

The transmission shall include a water to oil cooler system located in the cooling loop between the radiator and the engine. The transmission cooling system shall meet all transmission manufacturer requirements. The transmission cooling system shall feature continuous flow of engine bypass water to maintain uninterrupted transmission cooling.

## **TRANSMISSION DRAIN PLUG**

# SVI Trucks

The transmission shall include an original equipment manufacturer installed magnetic transmission fluid drain plug.

## **TRANSMISSION WARRANTY**

The Allison EVS series transmission shall be warranted for a period of five (5) years with unlimited mileage. Parts and labor shall be included in the warranty.

## **PTO LOCATION**

The transmission shall have two (2) power take off (PTO) mounting locations, one (1) in the 8:00 o'clock position and one (1) in the 4:00 o'clock position.

## **DRIVELINE**

All drivelines shall be heavy duty metal tube and equipped with Spicer 1710 series universal joints. The shafts shall be dynamically balanced prior to installation to alleviate future vibration. In areas of the driveline where a slip shaft is required, the splined slip joint shall be coated with Glide Coat®.

## **FUEL FILTER/WATER SEPARATOR**

The fuel system shall have a Fleetguard FS1003 fuel filter/water separator as a primary filter. The fuel filter shall have a drain valve.

A water in fuel sensor shall be provided and wired to an instrument panel lamp and audible alarm to indicate when water is present in the fuel/water separator.

A secondary fuel filter shall be included as approved by the engine manufacturer.

## **FUEL LINES**

The fuel system supply and return lines installed from the fuel tank to the engine shall be reinforced nylon tubing rated for diesel fuel. The fuel lines shall be brown in color and connected with brass fittings.

## **FUEL SHUTOFF VALVE**

A fuel shutoff valve shall be installed in the fuel draw line at the primary fuel filter to allow the fuel filter to be changed without loss of fuel to the fuel pump.

## **ELECTRIC FUEL PRIMER**

Integral to the engine assembly is an electric lift pump that serves the purpose of pre-filter fuel priming.

## **FUEL COOLER**

An aluminum cross flow air to fuel cooler shall be provided to lower fuel temperature allowing the vehicle to operate at higher ambient temperatures. The fuel cooler shall be located behind the rear axle.

## **FUEL TANK**

# SVI Trucks

The fuel tank shall have a capacity of sixty-eight (68) gallons and shall measure 35.00 inches in width X 17.00 inches in height X 29.00 inches in length. The baffled tank shall be made of 14 gauge aluminized steel. The exterior of the tank shall be painted with a PRP Corsol™ black anti-corrosive exterior metal treatment finish. This results in a tank which offers the internal and external corrosion resistance.

The tank shall have a vent port to facilitate venting to the top of the fill neck for rapid filling without "blow-back" and a roll over ball check vent for temperature related fuel expansion and draw.

The tank is designed with dual draw tubes and sender flanges. The tank shall have 2.00 inch NPT fill ports for right or left hand fill. A 0.50 inch NPT drain plug shall be centered in the bottom of the tank.

The fuel tank shall be mounted below the frame, behind the rear axle. Two (2) three-piece strap hanger assemblies with "U" straps bolted midway on the fuel tank front and rear shall be utilized to allow the tank to be easily lowered and removed for service purposes. Rubber isolating pads shall be provided between the tank and the upper tank mounting brackets. Strap mounting studs through the rail, hidden behind the body shall not be acceptable.

## **FUEL TANK MATERIAL AND FINISH**

The fuel tank shall be constructed of 14 gauge aluminized steel. The exterior of the fuel tank shall be painted to match the frame color.

## **FUEL TANK STRAP MATERIAL**

The fuel tank straps shall be constructed of ASTM A-36 steel.

## **FUEL TANK FILL PORT**

The fuel tank fill ports shall be provided with two (2) left fill ports located one (1) in the forward position and one (1) in the middle position and the right fill port located in the middle position of the fuel tank.

## **FUEL TANK DRAIN PLUG**

A 0.5 inch NPT drain plug shall be centered in the bottom of the fuel tank.

## **FRONT AXLE**

The front axle shall be a Meritor Easy Steer Non drive front axle, model number MFS-20. The axle shall include a 3.74 inch drop and a 71.00 inch king pin intersection (KPI). The axle shall include a conventional style hub with a standard knuckle. The weight capacity for the axle shall be rated to 21,500 pounds FAWR.

## **FRONT AXLE WARRANTY**

The front axle shall be warranted by Meritor for two (2) years with unlimited miles under the general service application. Details of the Meritor warranty are provided on the PDF document attached to this option.

## **FRONT WHEEL BEARING LUBRICATION**

The front axle wheel bearings shall be lubricated with oil. The oil level can be visually checked via clear inspection windows in the front axle hubs.

## **FRONT SHOCK ABSORBERS**

# SVI Trucks

Two (2) Bilstein inert, nitrogen gas filled shock absorbers shall be provided and installed as part of the front suspension system. The shocks shall be a monotubular design and fabricated using a special extrusion method, utilizing a single blank of steel without a welded seam, achieving an extremely tight peak-to-valley tolerance and maintains consistent wall thickness. The monotubular design shall provide superior strength while maximizing heat dissipation and shock life.

The ride afforded through the use of a gas shock is more consistent and shall not deteriorate with heat, the same way a conventional oil filled hydraulic shock would.

The Bilstein front shocks shall include a digressive working piston assembly allowing independent tuning of the compression and rebound damping forces to provide optimum ride and comfort without compromise. The working piston design shall feature fewer parts than most conventional twin tube and "road sensing" shock designs and shall contribute to the durability and long life of the Bilstein shock absorbers.

Proposals offering the use of conventional twin tube or "road sensing" designed shocks shall not be considered.

## **FRONT SUSPENSION**

The front suspension shall include a nine (9) leaf spring pack in which the longest leaf measures 54.00 inch long and 4.00 inches wide and shall include a military double wrapped front eye. Both spring eyes shall have a case hardened threaded bushing installed with lubrication counter bore and lubrication land off cross bore with grease fitting. The spring capacity shall be rated at 21,500 pounds.

## **STEERING COLUMN/ WHEEL**

The cab shall include a Douglas Autotech steering column which shall include a seven (7) position tilt, a 2.25 inch telescopic adjustment, and an 18.00 inch, four (4) spoke steering wheel located at the driver's position. The steering wheel shall be covered with black polyurethane foam padding.

The steering column shall contain a horn button, self-canceling turn signal switch, four-way hazard switch and headlamp dimmer switch.

## **ELECTRONIC POWER STEERING FLUID LEVEL INDICATOR**

The power steering fluid shall be monitored electronically and shall send a signal to activate an audible alarm and visual warning in the instrument panel when fluid level falls below normal.

## **POWER STEERING PUMP**

The hydraulic power steering pump shall be a TRW PS and shall be gear driven from the engine. The pump shall be a balanced, positive displacement, sliding vane type.

## **FRONT AXLE CRAMP ANGLE**

The chassis shall have a front axle cramp angle of 48-degrees to the left and 44-degrees to the right.

## **POWER STEERING GEAR**

The power steering gear shall be a TRW model TAS 65 with an assist cylinder.

## **CHASSIS ALIGNMENT**

# SVI Trucks

The chassis frame rails shall be measured to insure the length is correct and cross checked to make sure they run parallel and are square to each other. The front and rear axles shall be laser aligned. The front tires and wheels shall be aligned and toe-in set on the front tires by the chassis manufacturer.

## **REAR AXLE**

The rear axle shall be a Meritor model RS-24-160 single drive axle. The axle shall include precision forged, single reduction differential gearing, and shall have a rated capacity of 24,000 pounds.

The axle shall be built of superior construction and quality components to provide the rugged dependability needed to stand up to the fire industry's demands. The axle shall include rectangular shaped, hot-formed housing with a standard wall thickness of 0.50 of an inch for extra strength and rigidity and a rigid differential case for high axle strength and reduced maintenance.

The axle shall have heavy-duty Hypoid gearing for longer life, greater strength and quieter operation. Industry-standard wheel ends for compatibility with both disc and drum brakes, and unitized oil seal technology to keep lubricant in and help prevent contaminant damage will be used.

## **REAR AXLE DIFFERENTIAL LUBRICATION**

The rear axle differential shall be lubricated with oil.

## **REAR AXLE WARRANTY**

The rear axle shall be warranted by Meritor for two (2) years with unlimited miles under the general service application. Details of the Meritor warranty are provided on the PDF document attached to this option.

## **REAR WHEEL BEARING LUBRICATION**

The rear axle wheel bearings shall be lubricated with oil.

## **VEHICLE TOP SPEED**

The top speed of the vehicle shall be approximately 68 MPH +/-2 MPH at governed engine RPM.

## **REAR SUSPENSION**

The single rear axle shall feature a Reyco 102AR air suspension with a single air bag on each side attached to a tapered forged drop leaf spring with one adjustable and one fixed torque rod.

The suspension shall feature dual air height control valves which shall be installed to ensure equal frame height on both sides of the vehicle regardless of the load. The suspension shall also include two premium shock absorbers, one each side.

The rear suspension capacity shall be rated at 21,000 to 24,000 pounds to meet the rear axle rating selected.

## **REAR SHOCK ABSORBERS**

Shock absorbers shall be supplied by the suspension manufacturer and installed on the rear axle suspension.

## **FRONT TIRE**

# SVI Trucks

The front tires shall be Goodyear 425/65R-22.5 20PR "L" tubeless radial G296 MSA mixed service tread.

The front tire stamped load capacity shall be 22,800 pounds per axle with a nominal speed rating of 68 miles per hour when properly inflated to 120 pounds per square inch.

The Goodyear Intermittent Service Rating maximum load capacity shall be 24,400 pounds per axle with a speed rating of 68 miles per hour when properly inflated to 120 pounds per square inch.

The Goodyear Intermittent Service Rating maximum speed capacity shall be 22,800 pounds per axle with a speed rating of 75 miles per hour when properly inflated to 120 pounds per square inch.

The Goodyear Intermittent Service Rating limits the operation of the emergency vehicle to no more than fifty (50) miles of continuous operation under maximum recommended payload, or without stopping for at least twenty (20) minutes. The emergency vehicle must reduce its speed to no more than 50 MPH after the first fifty (50) miles of travel.

## **REAR TIRE**

The rear tires shall be Goodyear 11R-22.5 16PR "H" tubeless radial G661 HSA regional tread.

The rear tire stamped load capacity shall be 24,020 pounds per axle with a nominal speed rating of 75 miles per hour when properly inflated to 120 pounds per square inch.

The Goodyear Intermittent Service Rating maximum load capacity shall be 25,700 pounds per axle with a speed rating of 75 miles per hour when properly inflated to 120 pounds per square inch.

The Goodyear Intermittent Service Rating maximum speed capacity shall match the nominal speed rating.

The Goodyear Intermittent Service Rating limits the operation of the emergency vehicle to no more than fifty (50) miles of continuous operation under maximum recommended payload, or without stopping for at least twenty (20) minutes. The emergency vehicle must reduce its speed to no more than 50 MPH after the first fifty (50) miles of travel.

## **REAR AXLE RATIO**

The rear axle ratio shall be 5.63:1.

## **TIRE PRESSURE INDICATOR**

There shall be a voucher provided with the chassis for a pop up style tire pressure indicator at each tire valve stem. The indicator shall provide visual indication of pressure in the specific tire.

The tire pressure indicators shall be redeemed upon the vehicle manufacturer's receipt of the voucher for installation by the customer.

## **FRONT WHEEL**

The front wheels shall be Alcoa hub piloted, 22.50 inch X 12.25 inch LvL One™ polished aluminum wheels. The hub piloted mounting system shall provide easy installation and shall include two-piece flange nuts. The wheels shall feature one-piece forged strength and a polished finish that lasts.

# SVI Trucks

## **REAR WHEEL**

The outer rear wheels shall be Alcoa hub piloted, 22.50 inch X 8.25 inch LvL One™ aluminum wheels with a polished outer surface. The inner rear wheels shall be Alcoa hub piloted, 22.50 inch X 8.25 inch aluminum wheels with LvL One™ bright machine finish. The hub piloted mounting system shall provide easy installation and shall include two-piece flange nuts.

## **BALANCE WHEELS AND TIRES**

All of the wheels and tires, including any spare wheels and tire assemblies, shall be dynamically balanced.

## **BRAKE SYSTEM**

A rapid build-up air brake system shall be provided. The air brakes shall include a two (2) air tank, three (3) reservoir system with a total of 4152 cubic inch of air capacity. A floor mounted treadle valve shall be mounted inside the cab for graduated control of applying and releasing the brakes. An inversion valve shall be installed to provide a service brake application in the unlikely event of primary air supply loss. All air reservoirs provided on the chassis shall be labeled for identification.

The rear axle spring brakes shall automatically apply in any situation when the air pressure falls below 25 PSI and shall include a mechanical means for releasing the spring brakes when necessary. An audible alarm shall designate when the system air pressure is below 60 PSI.

A four (4) sensor, four (4) modulator Anti-lock Braking System (ABS) shall be installed on the front and rear axles in order to prevent the brakes from locking or skidding while braking during hard stops or on icy or wet surfaces. This in turn shall allow the driver to maintain steering control under heavy braking and in most instances, shorten the braking distance. The electronic monitoring system shall incorporate diagonal circuitry which shall monitor wheel speed during braking through a sensor and tone ring on each wheel. A dash mounted ABS lamp shall be provided to notify the driver of a system malfunction. The ABS system shall automatically disengage the auxiliary braking system device when required. The speedometer screen shall be capable of reporting all active defaults using PID/SID and FMI standards.

Additional safety shall be accommodated through Automatic Traction Control (ATC) which shall be installed on the single rear axle. The ATC system shall apply the ABS when the drive wheels loose traction. The system shall scale the electronic engine throttle back to prevent wheel spin while accelerating on ice or wet surfaces.

A virtual style switch shall be provided and properly labeled "mud/snow". When the switch is pressed once, the system shall allow a momentary wheel slip to obtain traction under extreme mud and snow conditions. During this condition the ATC light shall blink continuously notifying the driver of activation. Pressing the switch again shall deactivate the mud/snow feature.

The Electronic Stability Control (ESC) unit is a functional extension of the electronic braking system. It is able to detect any skidding of the vehicle about its vertical axis as well as any rollover tendency. The control unit comprises an angular-speed sensor that measures the vehicle's motion about the vertical axis, caused, for instance, by cornering or by skidding on a slippery road surface. An acceleration sensor measures the vehicle's lateral acceleration. The Controller Area Network (CAN) bus provides information on the steering angle. On the basis of lateral acceleration and steering angle, an integrated microcontroller calculates a theoretical angular speed for the stable vehicle condition.

## **FRONT BRAKES**

The front brakes shall be Meritor EX225 Disc Plus disc brakes with 17.00 inch vented rotors.

# SVI Trucks

## **REAR BRAKES**

The rear brakes shall be Meritor EX225 Disc Plus disc brakes with 17.00 inch vented rotors.

## **PARK BRAKE**

Upon application of the push-pull valve in the cab, the rear brakes will engage via mechanical spring force. This is accomplished by dual chamber rear brakes, satisfying the FMVSS parking brake requirements.

## **PARK BRAKE CONTROL**

A Meritor-Wabco manual hand control push-pull style valve shall operate the parking brake system. The control shall be yellow in color.

The parking brake actuation valve shall be mounted on the center of the tunnel within easy access of both the driver and officer positions.

## **AIR DRYER**

The brake system shall include a Wabco System Saver 1200 air dryer with an integral heater with a Metri-Pack sealed connector. The air dryer incorporates an internal turbo cutoff valve that closes the path between the air compressor and air dryer purge valve during the compressor "unload" cycle. The turbo cutoff valve allows purging of moisture and contaminants without the loss of turbo boost pressure. The air dryer shall be mounted behind the battery box on the left hand side.

## **FRONT BRAKE CHAMBERS**

The front brakes shall be provided with MGM type 24 long stroke brake chambers.

## **REAR BRAKE CHAMBERS**

The rear axle shall include TSE 24/30 H.O.T. (High Output Technology) brake chambers shall convert the energy of compressed air into mechanical force and motion. This shall actuate the brake camshaft, which in turn shall operate the foundational brake mechanism forcing the brake pads against the brake rotor.

## **AIR COMPRESSOR**

The air compressor provided for the engine shall be a Wabco<sup>®</sup> SS318 single cylinder pass-through drive type compressor which shall be capable of producing 18.7 CFM at 1200 engine RPMs. The air compressor shall feature a higher delivery efficiency translating to more air delivery per horsepower absorbed. The compressor shall include an aluminum cylinder head which shall improve cooling, reduce weight and decrease carbon formation. Superior piston and bore finishing technology shall reduce oil consumption and significantly increasing the system component life.

## **AIR GOVERNOR**

An air governor shall be provided to control the cut-in and cut-out pressures of the engine mounted air compressor. The governor shall be calibrated to meet FMVSS requirements. The air governor shall be located on the air dryer bracket on the left frame rail behind the battery box.

# SVI Trucks

## **MOISTURE EJECTORS**

An automatic moisture ejector with a manual drain provision shall be installed on the wet tank of the air supply system. Manual pet-cock type drain valves shall be installed on all remaining reservoirs of the air supply system.

## **AIR SUPPLY LINES**

The air system on the chassis shall be plumbed with color coded reinforced nylon tubing air lines. The primary (rear) brake line shall be green, the secondary (front) brake line red, the parking brake line orange and the auxiliary (outlet) will be blue.

Brass compression type fittings shall be used on the nylon tubing. All drop hoses shall include fiber reinforced neoprene covered hoses.

## **AIR INLET CONNECTION**

An air connection for the shoreline air inlet shall be supplied.

## **AIR INLET LOCATION**

The air inlet shall be installed in the left hand side lower front step in the forward position.

## **PLUMBING AIR INLET CONNECTION**

The air inlet connector shall be plumbed to the air system with a check valve to prevent air from escaping through the inlet connector.

## **AIR INLET/ OUTLET FITTING TYPE**

The air connector supplied shall be a 0.25 inch size Tru-Flate Interchange style manual connection which is compatible with Milton 'T' style, Myers 0.25 inch Automotive style and Parker 0.25 inch 10 Series connectors.

## **AIR TANK SPACERS**

There shall be spacers included with the air tank mounting. The spacers shall move the air tanks 1.50 inches inward towards the center of the chassis. This shall provide clearance between the air tanks and the frame for body U-bolt clearance.

## **REAR AIR TANK MOUNTING**

If a combination of wheel base, air tank quantity, or other requirements necessitate the location of one or more air tanks to be mounted rear of the fuel tank, these tank(s) will be mounted perpendicular to frame.

## **WHEELBASE**

The chassis wheelbase shall be 222.00 inches.

## **REAR OVERHANG**

The chassis rear overhang shall be 78.00 inches.

## **FRAME**

# SVI Trucks

The frame shall consist of double rails running parallel to each other with cross members forming a ladder style frame. The frame rails shall be formed in the shape of a "C" channel, with the outer rail measuring 10.25 inches high X 3.50 inches deep upper and lower flanges X 0.38 inches thick with an inner channel of 9.44 inches high X 3.13 inches deep and 0.38 inches thick. Each rail shall be constructed of 110,000 psi minimum yield high strength low alloy steel. Each double rail section shall be rated by a Resistance Bending Moment (RBM) minimum of 3,213,100 inch pounds and have a minimum section modulus of 29.21 cubic inches. The frame shall measure 35.00 inches in width.

Proposals calculating the frame strength using the "box method" shall not be considered.

Proposals including heat treated rails shall not be considered. Heat treating frame rails produces rails that are not uniform in their mechanical properties throughout the length of the rail. Rails made of high strength, low alloy steel are already at the required yield strength prior to forming the rail.

A minimum of seven (7) fully gusseted 0.25 inch thick cross members shall be installed. The inclusion of the body mounting, or bumper mounting shall not be considered as a cross member. The cross members shall be attached using zinc coated grade 8 fasteners. The bolt heads shall be flanged type, held in place by distorted thread flanged lock nuts. Each cross member shall be mounted to the frame rails utilizing a minimum of 0.25 inch thick gusset reinforcement plates at all corners balancing the area of force throughout the entire frame.

Any proposals not including additional reinforcement for each cross member shall not be considered.

All relief areas shall be cut in with a minimum 2.00 inch radius at intersection points with the edges ground to a smooth finish to prevent a stress concentration point.

The frame and cross members shall carry a lifetime warranty to the original purchaser. A copy of the frame warranty shall be made available upon request.

Proposals offering warranties for frames not including cross members shall not be considered.

## **FRAME WARRANTY**

Summary of Warranty Terms:

THE FOLLOWING IS SUMMARY OF WARRANTY TERMS FOR INFORMATION ONLY. THE ACTUAL LIMITED WARRANTY DOCUMENT, WHICH IS ATTACHED TO THIS OPTION, CONTAINS THE COMPLETE STATEMENT OF THE SPARTAN MOTORS USA LIMITED WARRANTY. SPARTAN'S RESPONSIBILITY IS TO BE ACCORDING TO THE TERMS OF THE COMPLETE LIMITED WARRANTY DOCUMENT.

The frame and cross members shall carry a limited lifetime warranty to the original purchaser. The warranty period shall commence on the date the vehicle is delivered to the first end user.

## **FRAME PAINT**

The frame shall be powder coated black prior to any attachment of components.

All powder coatings, primers and paint shall be compatible with all metals, pretreatments and primers used. The cross hatch adhesion test per ASTM D3359 shall not have a fail of more than ten (10) squares. The pencil hardness test per ASTM D3363 shall have a final post-curved pencil hardness of H-2H. The direct impact resistance test per ASTM D2794 shall have an impact resistance of 120.00 inches per pound at 2 mils.

# SVI Trucks

Any proposals offering painted frame with variations from the above process shall not be accepted. The film thickness of vendor supplied parts shall also be sufficient to meet the performance standards as stated above.

## **FRONT BUMPER**

A one piece, two (2) rib wrap-around style, polished stainless steel front bumper shall be provided. The material shall be 10 gauge 304 stainless steel, 12.00 inches high and 99.00 inches wide.

## **FRONT BUMPER EXTENSION LENGTH**

The front bumper shall be extended approximately 6.00 inches ahead of the cab.

## **FRONT BUMPER APRON**

The 6.00 inch extended front bumper shall include an apron constructed of 0.19 inch thick embossed aluminum tread plate.

The apron shall be installed between the bumper and the front face of the cab affixed using stainless steel bolts attaching the apron to the top bumper flange.

## **AIR HORN**

The chassis shall include **two (2) Grover brand Stutter Tone** air horns which shall measure 21.00 inches long with a 6.00 inch round flare. The air horns shall be trumpet style with a chrome finish.

## **AIR HORN LOCATION**

The air horns shall be recess mounted in the front bumper face, one (1) on the right side of the bumper in the inboard position relative to the right hand frame rail and one (1) on the left side of the bumper in the inboard position relative to the left hand frame rail.

## **AIR HORN RESERVOIR**

One (1) air reservoir, with a 2084 cubic inch capacity, shall be installed on the chassis to act as a supply tank for operating air horns. The reservoir shall be isolated with a 90 PSI pressure protection valve on the reservoir supply side to prevent depletion of the air to the air brake system.

## **ELECTRONIC SIREN SPEAKER**

There shall be **two (2) Whelen model SA314A**, 100 watt speakers provided.

## **ELECTRONIC SIREN SPEAKER LOCATION**

The two (2) electronic siren speakers shall be located on the front bumper face outboard of the frame rails with one (1) on the right side and one (1) on the left side in the outboard positions.

## **FRONT BUMPER TOW EYES**

The bumper shall include two (2) painted tow eyes which shall be installed below the front bumper. The tow eyes shall be fabricated from 0.75 inch thick #1020 ASTM-36 hot rolled steel. The inside diameter of the eye shall be 2.00 inches and include a chamfered edge. **The tow eyes shall be painted to match the frame.**

# SVI Trucks

## **CAB TILT SYSTEM**

The entire cab shall be capable of tilting approximately 45-degrees to allow for easy maintenance of the engine and transmission. The cab tilt pump assembly shall be located on the right side of the chassis above the battery box.

The electric-over-hydraulic lift system shall include an ignition interlock and red cab lock down indicator lamp on the tilt control which shall illuminate when holding the "Down" button to indicate safe road operation.

It shall be necessary to activate the master battery switch and set the parking brake in order to tilt the cab. As a third precaution the ignition switch must be turned off to complete the cab tilt interlock safety circuit.

Two (2) spring-loaded hydraulic hold down hooks located outboard of the frame shall be installed to hold the cab securely to the frame. Once the hold-down hooks are set in place, it shall take the application of pressure from the hydraulic cab tilt lift pump to release the hooks.

Two (2) cab tilt cylinders shall be provided with velocity fuses in each cylinder port. The cab tilt pivots shall be 1.90 inch ball and be anchored to frame brackets with 1.25 inch diameter studs.

A steel safety channel assembly, painted safety yellow shall be installed on the right side cab lift cylinder to prevent accidental cab lowering. The safety channel assembly shall fall over the lift cylinder when the cab is in the fully tilted position. A cable release system shall also be provided to retract the safety channel assembly from the lift cylinder to allow the lowering of the cab.

## **CAB TILT AUXILIARY PUMP**

A manual cab tilt pump module shall be attached to the cab tilt pump housing.

## **CAB TILT CONTROL RECEPTACLE**

A six (6) pin Deutsch receptacle that includes a cap shall be installed in the front bumper tail on the right hand side to provide a place to plug in the cab tilt remote control pendant.

The remote control pendant shall include 20.00 feet of cable with a mating Deutsch connector. The remote control pendant shall be shipped loose with the chassis.

## **CAB WINDSHIELD**

The cab windshield shall have a surface area of 2825.00 square inches and be of a two (2) piece wraparound design for maximum visibility.

The glass utilized for the windshield shall include standard automotive tint. The left and right windshield shall be fully interchangeable thereby minimizing stocking and replacement costs.

Each windshield shall be installed using black self locking window rubber.

## **GLASS FRONT DOOR**

The front cab doors shall include a window which is 27.00 inches in width X 26.00 inches in height. These windows shall have the capability to roll down completely into the door housing. This shall be accomplished manually utilizing a crank style handle on the inside of the door. A reinforced window regulator assembly shall be provided for severe duty use.

# SVI Trucks

There shall be an irregular shaped fixed window which shall measure 2.50 inches wide at the top, 8.00 inches wide at the bottom X 26.00 inches in height, more commonly known as “cozy glass” ahead of the front door roll down windows.

The windows shall be mounted within the frame of the front doors trimmed with a black anodized ring on the exterior.

## **GLASS TINT FRONT DOOR**

The windows located in the left and right front doors shall include a dark gray automotive tint which shall allow forty-five percent (45%) light transmittance. The dark tint shall aid in cab cooling and help protect passengers from radiant solar energy.

## **GLASS REAR DOOR RH**

The rear right hand side door shall include a window which is 27.00 inches in width X 26.00 inches in height. This window shall roll up and down manually utilizing a crank style handle on the inside of the door. A reinforced window regulator assembly shall be provided for severe duty use.

## **GLASS TINT REAR DOOR RIGHT HAND**

The window located in the right hand side rear window shall include a dark gray automotive tint which shall allow forty-five percent (45%) light transmittance. The dark tint shall aid in cab cooling and help protect passengers from radiant solar energy.

## **GLASS REAR DOOR LH**

The left hand side of the cab where the rear door would normally be shall include a window which is 31.00 inches in width X 26.00 inches in height. This window shall be in line with the other cab side window glass and shall be a fixed type window. This window shall be mounted using black self-locking window rubber.

## **GLASS TINT REAR DOOR LEFT HAND**

The window located in the left hand side rear door shall include a dark gray automotive tint which shall allow forty-five percent (45%) light transmittance. The dark tint shall aid in cab cooling and help protect passengers from radiant solar energy.

## **CLIMATE CONTROL**

A ceiling mounted combination defroster and cabin heating and air conditioning system shall be located above the engine tunnel area. The system covers and plenums shall be of severe duty design made of aluminum which shall be coated with a customer specified interior paint. The design of the system's covers shall provide quick access to washable air intake filters as well as easy access to other serviceable items.

The air delivery plenums provide targeted airflow directly to the vehicle occupants. Six (6) adjustable louvers will provide comfort for the front seat occupants and ten (10) adjustable louvers will provide comfort for the rear crew occupants.

The system shall be capable of producing up to 12 FPM of air velocity at all occupant seating positions. Separate front and rear blower motors shall be of brushless design and shall be controlled independently. It shall be capable

# SVI Trucks

of reducing the interior cabin air temperature from 122° F (+/- 3° F) to 80° F in thirty minutes with 50% relative humidity and full solar load as described in SAE J2646.

The system shall also provide heater pull up performance which meets or exceeds the performance requirements of SAE J1612 as well as defrost performance that meets or exceeds the performance requirements of SAE J381.

A gravity drain system shall be provided that is capable of evacuating condensate from the vehicle while on a slope of up to a 13% grade in any direction.

The air conditioning system plumbing shall be a mixture of custom bent zinc coated steel fittings and Aero-quip GH134 flexible hose with Aeroquip EZ-Clip fittings.

The overhead heater/defroster plumbing shall include an electronic flow control valve that re-directs hot coolant away from the evaporator, via a bypass loop, as the temperature control is moved toward the cold position.

Any component which needs to be accessed to perform system troubleshooting shall be accessible by one person using basic hand tools. Regularly serviced items shall be replaceable by one person using basic hand tools.

*\*\*Performance data is based on testing performed by an independent third party test facility using a medium four-door 10" Raised roof Gladiator chassis equipped with an ISL engine.*

## **CLIMATE CONTROL DRAIN**

The climate control system shall include a gravity drain for water management. The gravity drain shall remove condensation from the air conditioning system without additional mechanical assistance.

## **CLIMATE CONTROL ACTIVATION**

The heating, defrosting and air conditioning controls shall be located on the center dash panel in the lower left hand side, in a position which is easily accessible to the driver. The climate control shall be activated by a rotary switch.

## **HVAC OVERHEAD COVER PAINT**

The overhead HVAC cover shall be painted with a multi-tone onyx black texture finish.

## **A/C CONDENSER LOCATION**

A roof mounted A/C condenser shall be installed centered on the cab forward of the raised roof against the slope rise.

## **A/C COMPRESSOR**

The air-conditioning compressor shall be a belt driven, engine mounted compressor. The compressor shall be compatible with R134-a refrigerant.

## **UNDER CAB INSULATION**

The underside of the cab tunnel surrounding the engine and the underside of the entire cab floor shall be lined with multi-layer insulation, engineered for application inside diesel engine compartments. In addition the insulation shall

# SVI Trucks

have an expanded aluminum overlay installed to assist in retaining the insulation tight against the engine tunnel surfaces and the underside of the cab floor.

The insulation shall act as a noise barrier, absorbing noise thus keeping the decibel level in the cab well within NFPA recommendations. As an additional benefit, the insulation shall assist in sustaining the desired temperature within the cab interior.

The engine tunnel insulation shall measure approximately 0.75 inch thick including a vertically lapped polyester fiber layer, a 1.0 lb/ft<sup>2</sup> PVC barrier layer, an open cell foam layer, and a moisture and heat reflective foil facing reinforced with a woven fiberglass layer. The foil surface acts as protection against moisture and other contaminants. The insulation shall meet or exceed FMVSS 302 flammability test.

The cab floor insulation shall measure 0.56 inch thick including a 1.0#/sf PVC barrier and a moisture and heat reflective foil facing, reinforced with fiberglass strands. The foil surface acts as protection against moisture and other contaminants. The insulation shall meet or exceed FMVSS 302 flammability test.

The insulation shall be cut precisely to fit each section and sealed for additional heat and sound deflection. The insulation shall be held in place by 3 mils of acrylic pressure sensitive adhesive and aluminum pins with hard hat, hold in place fastening heads.

## **INTERIOR TRIM FLOOR**

The floor of the cab shall be covered with a multi-layer mat consisting of 0.25 inch thick sound absorbing closed cell foam with a 0.06 inch thick non-slip vinyl surface with a pebble grain finish. The covering shall be held in place by a pressure sensitive adhesive and aluminum trim molding. All exposed seams shall be sealed with silicone caulk matching the color of the floor mat to reduce the chance of moisture and debris retention.

## **INTERIOR TRIM**

The cab interior shall include trim on the front ceiling, rear crew ceiling, and the cab walls. It shall be easily removable to assist in maintenance. The trim shall be constructed of insulated vinyl over a hard board backing.

## **REAR WALL INTERIOR TRIM**

The rear wall of the cab shall be trimmed with vinyl.

## **HEADER TRIM**

The cab interior shall feature header trim over the driver and officer dash constructed of 5052-H32 Marine Grade, 0.13 inch thick aluminum.

## **TRIM CENTER DASH**

The main center dash area shall be constructed of 5052-H32 Marine Grade, 0.13 inch thick aluminum plate. There shall be four (4) holes located on the top of the dash near each outer edge of the electrical access cover for ventilation. The dash shall include cup holders and storage bins.

## **TRIM LH DASH**

The left hand dash shall be constructed of 5052-H32 Marine Grade, 0.13 inch thick aluminum plate for a perfect fit around the instrument panel. For increased occupant protection the extreme duty left hand dash utilizes patent

# SVI Trucks

pending break away technology to reduce rigidity in the event of a frontal crash. The left hand dash shall offer lower vertical surface area to the left and right of the steering column to accommodate control panels.

## **TRIM RH DASH**

The right hand dash shall be constructed of 5052-H32 Marine Grade, 0.13 of an inch thick aluminum plate and shall include a glove compartment with a hinged door and a Mobile Data Terminal (MDT) provision. The glove compartment size will measure 14.00 inches wide X 6.38 inches high X 5.88 inches deep. The MDT provision shall be provided above the glove compartment.

## **TRIM RH DASH ACCESSORIES**

The Mobile Data Terminal (MDT) provision on the right hand dash shall be provided with a slide-out tray. The MDT slide-out tray shall be constructed of 5052-H32 Marine Grade, 0.13 of an inch thick aluminum plate. The mounting surface of the tray measures 12.50 inches wide X 10.75 inches deep which shall allow for the mounting of a MDT with the added luxury of sliding it toward the officer as much as 11.00 inches.

## **ENGINE TUNNEL TRIM**

The cab engine tunnel shall be covered with a multi-layer mat consisting of 0.25 inch closed cell foam with a 0.06 inch thick non-slip vinyl surface with a pebble grain finish. The mat shall be held in place by pressure sensitive adhesive. The engine tunnel mat shall be trimmed with anodized aluminum stair nosing trim for an aesthetically pleasing appearance.

## **ENGINE TUNNEL ACCESSORIES**

The engine tunnel shall feature a fabricated aluminum console which shall include a large storage bin with dividers and a map compartment. There shall be two (2) cup holders included in the console.

## **POWER POINT DASH MOUNT**

The cab shall include a 12 volt cigarette lighter type receptacle in the center cab dash to provide a power source for 12 volt electrical equipment. The cab shall also include two (2) universal serial bus (USB) charging receptacles in the center cab dash to provide a power source for USB chargeable electrical equipment. Each USB port shall be capable of a 5 Volt-500 milliampere output. The receptacles shall be wired to be live with the battery master switch.

## **STEP TRIM**

Each cab entry door shall include a three step entry. The first step closest to the ground shall be constructed of polished 5032 H32 aluminum Grip Strut® grating with angled outer corners. The step shall feature a splash guard to reduce water and debris from splashing in to the step. The splash guard shall have an opening on the outer edge to allow debris and water to flow through rather than becoming trapped within the stepping surface. The lower step shall be mounted to a frame which is integral with the construction of the cab for rigidity and strength. The middle step shall be integral with the cab construction and shall be trimmed with a Flex-Tred® adhesive grit surface material.

## **UNDER CAB ACCESS DOOR**

# SVI Trucks

The cab shall include an under cab access door. The lower rear left side of the three (3) door cab shall include one (1) access door to provide access to the diesel exhaust fluid fill with a push and turn latch. The left side cab access door shall be painted to match the lower exterior of the cab.

## **INTERIOR DOOR TRIM**

The interior trim on the doors of the cab shall consist of an aluminum panel constructed of Marine Grade 5052-H32 0.13 of an inch thick aluminum plate. The door panels shall include a painted finish.

## **DOOR TRIM CUSTOMER NAMEPLATE**

The interior door trim on the front doors shall include a customer nameplate which states the vehicle was custom built for their Department.

## **CAB DOOR TRIM REFLECTIVE**

The interior of each door shall include high visibility reflective tape. A white reflective tape shall be provided vertically along the rear outer edge of the door. The lowest portion of each door skin shall include a reflective tape chevron with red and white stripes and a Spartan logo. The chevron tape shall measure 6.00 inches in height.

## **INTERIOR GRAB HANDLE "A" PILLAR**

There shall be two (2) rubber covered 11.00 inch grab handles installed inside the cab, one on each "A" post at the left and right door openings. The left handle shall be located 7.88 inches above the bottom of the door window opening and the right handle shall be located 2.88 inches above the bottom of the door window opening. The handles shall assist personnel in entering and exiting the cab.

## **INTERIOR GRAB HANDLE FRONT DOOR**

Each front door shall include one (1) ergonomically contoured 9.00 inch cast aluminum handle mounted horizontally on the interior door panels. The handles shall feature a textured black powder coat finish to assist personnel entering and exiting the cab.

## **INTERIOR GRAB HANDLE REAR DOOR**

A black powder coated cast aluminum assist handle shall be provided on the inside of each rear crew door. A 30.00 inch long handle shall extend horizontally the width of the window just above the window sill. The handle shall assist personnel in exiting and entering the cab.

## **INTERIOR SOFT TRIM COLOR**

The cab interior soft trim surfaces shall be black in color.

## **INTERIOR TRIM SUNVISOR**

The header shall include two (2) sun visors, one each side forward of the driver and officer seating positions above the windshield. Each sun visor shall be constructed of Masonite and covered with padded vinyl trim.

## **INTERIOR FLOOR MAT COLOR**

The cab interior floor mat shall be black in color.

# SVI Trucks

## **CAB PAINT INTERIOR DOOR TRIM**

The inner door panel surfaces shall be painted with multi-tone onyx black texture finish.

## **HEADER TRIM INTERIOR PAINT**

The metal surfaces in the header area shall be coated with multi-tone onyx black texture finish.

## **TRIM CENTER DASH INTERIOR PAINT**

The entire center dash shall be coated with multi-tone onyx black texture finish. Any accessory pods attached to the dash shall also be painted this color.

## **TRIM LH DASH INTERIOR PAINT**

The left hand dash shall be painted with a multi-tone onyx black texture finish.

## **TRIM RIGHT HAND DASH INTERIOR PAINT**

The right hand dash shall be painted with multi-tone onyx black texture finish.

## **RIGHT HAND DASH ACCESSORIES INTERIOR PAINT**

The right hand dash accessories shall be painted with multi-tone onyx black texture finish.

## **ENGINE TUNNEL ACCESSORIES PAINT**

The engine tunnel accessories shall be painted with multi-tone onyx black texture finish.

## **DASH PANEL GROUP**

The main center dash area shall include three (3) removable panels located one (1) to the right of the driver position, one (1) in the center of the dash and one (1) to the left of the officer position. The center panel shall be within comfortable reach of both the driver and officer.

## **SWITCHES CENTER PANEL**

The center dash panel shall include no rocker switches or legends.

## **SWITCHES LEFT PANEL**

The left dash panel shall include one (1) windshield wiper/washer control switch located in the left hand side of the panel. The switch shall have backlighting provided.

## **SWITCHES RIGHT PANEL**

The right dash panel shall include no rocker switches or legends.

## **SEAT BELT WARNING**

# SVI Trucks

A Weldon seat belt warning system, integrated with the Vehicle Data Recorder system, shall be installed for each seat within the cab. The system shall provide a visual warning indicator in the Vista display and control screen(s), an indicator light in the instrument panel, and an audible alarm.

The warning system shall activate when any seat is occupied with a minimum of 60 pounds, the corresponding seat belt remains unfastened, and the park brake is released. The warning system shall also activate when any seat is occupied, the corresponding seat belt was fastened in an incorrect sequence, and the park brake is released. Once activated, the visual indicators and audible alarm shall remain active until all occupied seats have the seat belts fastened.

## **SEAT MATERIAL**

The seats shall include a covering of high strength, wear resistant fabric made of durable ballistic polyester. A PVC coating shall be bonded to the back side of the material to help protect the seats from UV rays and from being saturated or contaminated by fluids. Common trade names for this material are Imperial 1200 and Durawear.

## **SEAT COLOR**

All seats supplied with the chassis shall be gray in color. All seats shall include red seat belts.

## **SEAT BACK LOGO**

The seat back shall include the "Spartan" logo. The logo shall be centered on the standard headrest of the seat back and on the left side of a split headrest.

## **SEAT DRIVER**

The driver's seat shall be an H.O. Bostrom 400 Series Firefighter Sierra model seat. The seat shall feature eight-way electric positioning. The eight positions shall include up and down, fore and aft with 8.00 inches of travel, back angle adjustment and seat rake adjustment. The seat shall feature integral springs to isolate shock.

**The seat shall be wired battery direct.**

The seat shall feature an all belts to seat (ABTS) style of safety restraint. The ABTS feature shall include a three-point shoulder harness with the lap belt, automatic retractor and buckle as an integral part of the seat assembly.

The minimum vertical dimension from the seat H-point to the ceiling for this belted seating position shall be 35.00 inches measured with the seat height adjusted to the lowest position of travel.

This model of seat shall have successfully completed the static load tests set forth by FMVSS 207, 209, and 210 in effect at the time of manufacture. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity.

The materials used in construction of the seat shall also have successfully completed testing with regard to the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which dictates the allowable burning rate of materials in the occupant compartments of motor vehicles.

## **SEAT BACK DRIVER**

The driver's seat shall include a standard seat back incorporating the all belts to seat feature (ABTS). The seat back shall feature a contoured head rest.

# SVI Trucks

## **SEAT MOUNTING DRIVER**

The driver's seat shall be installed in an ergonomic position in relation to the cab dash.

## **SEAT OFFICER**

The officer's seat shall be an H.O. Bostrom 400 Series Firefighter model seat. The seat shall feature eight-way electric positioning. The eight (8) positions shall include up and down, fore and aft and front and rear tilt. The seat shall also feature integral springs to isolate shock.

The seat shall feature an all belts to seat (ABTS) style of safety restraint. The ABTS feature shall include a three-point shoulder harness with the lap belt, automatic retractor and buckle as an integral part of the seat assembly.

The minimum vertical dimension from the seat H-point to the ceiling for this belted seating position shall be 35.00 inches measured with the seat height adjusted to the lowest position of travel.

This model of seat shall have successfully completed the static load tests by FMVSS 207, 209, 210 and 302 in effect at the time of manufacture. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity. The model of seats shall also have successfully completed the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which decides the burning rate of materials in the occupant compartments of motor vehicles.

## **SEAT BACK OFFICER**

The officer's seat shall include a standard seat back incorporating the all belts to seat feature (ABTS). The seat back shall feature a contoured head rest.

## **SEAT MOUNTING OFFICER**

The officer's seat shall be installed in an ergonomic position in relation to the cab dash.

## **POWER SEAT WIRING**

The power seat or seats installed in the cab shall be wired to **battery power controlled by the battery master switch.**

## **CAB FRONT UNDERSEAT STORAGE ACCESS**

The left and right under seat storage areas shall have a solid aluminum hinged door with non-locking latch.

## **SEAT COMPARTMENT DOOR FINISH**

All underseat storage compartment access doors shall have a multi-tone onyx black texture finish.

## **WINDSHIELD WIPER SYSTEM**

The cab shall include a dual arm wiper system which shall clear the windshield of water, ice and debris. There shall be two (2) windshield wipers which shall be affixed to a radial wet arm. The system shall include a single motor which shall initiate the arm in which both the left hand and right hand windshield wipers are attached, initiating a back and forth motion for each wiper. The wiper motor shall be activated by an intermittent wiper control located within easy reach of the driver's position.

# SVI Trucks

## **ELECTRONIC WINDSHIELD FLUID LEVEL INDICATOR**

The windshield washer fluid level shall be monitored electronically. When the washer fluid level becomes low the yellow "Check Message Center" indicator light on the instrument panel shall illuminate and the message center in the dual air pressure gauge shall display a "Check Washer Fluid Level" message.

## **CAB DOOR HARDWARE**

The cab entry doors shall be equipped with exterior pull handles, suitable for use while wearing firefighter gloves. The handles shall be made of aluminum with a chrome plated finish.

The interior exit door handles shall be flush paddle type with a black finish, which are incorporated into the upper door panel.

All cab entry doors shall include locks which are keyed alike. The door locks shall be designed to prevent accidental lockout.

## **DOOR LOCKS**

Each cab entry door shall include a **manually operated door lock**. Each door lock may be actuated from the inside of the cab by means of a red knob located on the paddle handle of the respective door or by using a TriMark key from the exterior. The door locks are designed to prevent accidental lock out.

## **DOOR LOCK LH REAR CAB COMPARTMENT**

The left hand side rear compartment shall feature a manual door lock.

## **DOOR LOCK RH REAR CAB COMPARTMENT**

The right hand side rear compartment shall feature a manual door lock.

## **GRAB HANDLES**

The cab shall include one (1) 18.00 inch knurled, anti-slip, one-piece exterior assist handle behind each cab door. The grab handle shall be made of 14 gauge 304- stainless steel and be 1.25 inch diameter to enable non-slip assistance with a gloved hand.

## **REARVIEW MIRRORS**

Ramco model CRM-310-1750-PCHR bus style mirrors shall be provided. The mirror heads shall be injection molded chrome plated ABS plastic and shall measure 9.50 inches wide X 17.50 inches high. The mirrors shall be mounted one (1) on each the driver and officer doors of the cab with polished die-cast aluminum arms.

The mirrors shall feature an upper heated remote controlled flat glass and a lower heated remote controlled convex glass. The mirror control switches shall be located within easy reach of the driver. The mirrors shall be manufactured using the finest quality non-glare glass and shall feature a rigid mounting thereby reducing vibration. The mirrors shall be corrosion free under all weather conditions.

## **REARVIEW MIRROR HEAT SWITCH**

# SVI Trucks

The heat for the rearview mirrors shall be controlled through a virtual button on the Vista display and control screen.

## **CAB FENDER**

Full width wheel well liners shall be installed on the extruded cab to limit road splash and enable easier cleaning. Each two-piece liner shall consist of an inner liner 16.00 inches wide made of vacuum formed ABS composite and an outer fenderette 3.50 inches wide made of 14 gauge 304 polished stainless steel.

## **MUD FLAPS FRONT**

The front wheel wells shall have mud flaps installed on them.

## **CAB EXTERIOR FRONT & SIDE EMBLEMS**

The cab shall include three (3) Spartan emblems. There shall be one (1) installed on the front air intake grille and one (1) emblem on the exterior of the cab on the lower forward portion of the front driver and officer side doors.

## **IGNITION**

A master battery system with a keyless start ignition system shall be provided. Each system shall be controlled by a one-quarter turn Cole Hersee switch, both of which shall be mounted to the left of the steering wheel on the dash. A chrome push type starter button shall be provided adjacent to the master battery and ignition switches.

Each switch shall illuminate a green LED indicator light on the dash when the respective switch is placed in the "ON" position.

The starter button shall only operate when both the master battery and ignition switches are in the "ON" position.

## **BATTERY**

The single start electrical system shall include six (6) Harris BCI 31 925 CCA batteries with a 210 minute reserve capacity and 4/0 welding type dual path starter cables per SAE J541.

## **BATTERY TRAY**

The batteries shall be installed within two (2) steel battery trays located on the left side and right side of the chassis, securely bolted to the frame rails. The battery trays shall be coated with the same material as the frame.

The battery trays shall include drain holes in the bottom for sufficient drainage of water. A durable, non-conducting, interlocking mat made by Dri-Dek shall be installed in the bottom of the trays to allow for air flow and help prevent moisture build up. The batteries shall be held in place by non-conducting phenolic resin hold down boards.

## **BATTERY BOX COVER**

Each battery box shall include a steel cover which protects the top of the batteries. Each cover shall include flush latches which shall keep the cover secure as well as a black powder coated handle for convenience when opening.

## **BATTERY CABLE**

# SVI Trucks

The starting system shall include cables which shall be protected by 275 degree F. minimum high temperature flame retardant loom, sealed at the ends with heat shrink and sealant.

## **BATTERY JUMPER STUD**

The starting system shall include battery jumper studs. These studs shall be located in the forward most portion of the driver's side lower step. The studs shall allow the vehicle to be jump started, charged, or the cab to be raised in an emergency in the event of battery failure.

## **ALTERNATOR**

The charging system shall include a 320 amp Leece-Neville 12 volt alternator. The alternator shall include a self-exciting integral regulator.

## **ELECTRICAL INLET**

A Kussmaul 30 amp super auto-eject electrical receptacle shall be supplied. It shall automatically eject the plug when the starter button is depressed.

A single item or an addition of multiple items must not exceed the rating of the electric inlet that it's connected to.

### **Amp Draw Reference List:**

*Kussmaul 1000 Charger - 3.5 Amps*

*Kussmaul 1200 Charger - 10 Amps*

*Kussmaul 35/10 Charger - 10 Amps*

*1000W Engine Heater - 8.33 Amps*

*1500W Engine Heater - 12.5 Amps*

*120V Air Compressor - 4.2 Amps*

## **ELECTRICAL INLET LOCATION**

An electrical inlet shall be installed on the left hand side of cab over the wheel well.

## **ELECTRICAL INLET CONNECTION**

The electrical inlet shall be pre-wired.

## **ELECTRICAL INLET COLOR**

The electrical inlet connection shall include a **RED cover**.

## **HEADLIGHTS**

The cab front shall include four (4) rectangular halogen headlamps with separate high and low beams mounted in bright chrome bezels.

## **FRONT TURN SIGNALS**

The front fascia shall include two (2) Whelen model 600 4.00 inch X 6.00 inch programmable LED amber turn signals which shall be installed in a chrome bezel outboard of the front warning and above the headlamps.

## **HEADLIGHT LOCATION**

# SVI Trucks

The headlights shall be located on the front fascia of the cab directly below the front warning lights.

## **SIDE TURN/MARKER LIGHTS**

The sides of the cab shall include two (2) LED round side marker lights which shall be provided just behind the front cab radius corners.

## **MARKER AND ICC LIGHTS**

In accordance with FMVSS, there shall be five (5) LED cab marker lamps designating identification, center and clearance provided. These lights shall be installed on the face of the cab within full view of other vehicles from ground level.

## **HEADLIGHT AND MARKER LIGHT ACTIVATION**

The headlights and marker lights shall be controlled via a virtual button on the Vista display. There shall be a virtual dimmer control on the Vista display to adjust the brightness of the dash lights. The headlamps shall be equipped with the "Daytime Running" light feature, which shall illuminate the headlights to 80% brilliance when the battery master switch is in the "On" position and the parking brake is released.

## **GROUND LIGHTS**

Each door shall include an NFPA compliant LED ground light mounted to the underside of the cab step below each door. The lights shall include a polycarbonate lens, a housing which is vibration welded and LEDs which shall be shock mounted for extended life. The ground lighting shall be activated by the opening of the door on the respective cab side as well as through a virtual button on the Vista display and control screen.

## **LOWER CAB STEP LIGHTS**

The middle step located at each door shall include a recess mounted 4.00 inch round LED light which shall activate with the opening of the respective door.

## **INTERMEDIATE STEP LIGHTS**

The intermediate step well area at each door shall include an LED light within a chrome housing. The Egress step lights shall provide visibility to the step well area for the first step exiting the vehicle. The Egress step lights shall activate with Entry step lighting.

## **ENGINE COMPARTMENT LIGHT**

There shall be an incandescent NFPA compliant light mounted under the engine tunnel for area work lighting on the engine. The light shall include a polycarbonate lens, a housing which is vibration welded and a bulb which shall be shock mounted for extended life. The light shall activate automatically when the cab is tilted.

## **SIDE SCENE LIGHTS**

The side of the cab shall include two (2) Whelen 900 series 9SC0ENZR model scene lights, one (1) each side which shall be surface mounted with a chrome bezel. The Whelen lights shall offer LED lighting at a gradient 32-degree angle.

## **SIDE SCENE LIGHT LOCATION**

# SVI Trucks

The scene lighting located on the left and right sides of the cab shall be mounted in the upper forward portion of the 20.00 inch raised roof of the cab between the front and rear crew doors.

## **SIDE SCENE ACTIVATION**

The scene lights shall be activated by two (2) virtual buttons on the Vista display and control screen(s), one (1) for each light, and by opening the respective side cab doors.

## **INTERIOR OVERHEAD LIGHTS**

The cab shall include a two-section, red and clear Weldon LED dome lamp located over each door. The dome lamps shall be rectangular in shape and shall measure approximately 7.00 inches in length X 3.00 inches in width with a black colored bezel. The clear portion of each lamp shall be activated by opening the respective door and both the red and clear portion can be activated by individual push lenses on each lamp.

An additional incandescent three (3) light module with dual map lights shall be located over the engine tunnel which can be activated by individual switches on the lamp.

## **DO NOT MOVE APPARATUS LIGHT**

The front headliner of the cab shall include a flashing red light clearly labeled "Do Not Move Apparatus". In addition to the flashing red light, an audible alarm shall be included which shall sound while the light is activated.

The flashing red light shall be 6.00 inches long X 2.50 inches wide X 1.75 inches high and shall be located centered left to right for greatest visibility.

The light and alarm shall be interlocked for activation when either a cab door is not firmly closed or an apparatus compartment door is not closed, and the parking brake is released.

## **MASTER WARNING SWITCH**

A master switch shall be included, as a virtual button on the Vista display and control screen which shall be labeled "E Master" for identification. The button shall feature control over all devices wired through it. Any warning device switches left in the "ON" position when the master switch is activated shall automatically power up.

## **HEADLIGHT FLASHER**

An alternating high beam headlight flashing system shall be installed into the high beam headlight circuit which shall allow the high beams to flash alternately from left to right.

Deliberate operator selection of high beams will override the flashing function until low beams are again selected. Per NFPA, these clear flashing lights will also be disabled "On Scene" when the park brake is applied.

## **HEADLIGHT FLASHER SWITCH**

The flashing headlights shall be activated through a virtual button on the Vista display and control screen.

## **INBOARD FRONT WARNING LIGHTS**

The cab front fascia shall include two (2) Whelen 600 series Super LED front warning lights in the left and right inboard positions. The lights shall feature multiple flash patterns including steady burn for solid colors and multiple flash patterns for split colors. The lights shall be mounted to the front fascia of the cab within a chrome bezel.

# SVI Trucks

## **INBOARD FRONT WARNING LIGHTS COLOR**

The warning lights mounted on the cab front fascia in the inboard positions shall be red.

## **FRONT WARNING SWITCH**

The front warning lights shall be controlled through a virtual control on the Vista display and control screen. This switch shall be clearly labeled for identification.

## **INTERSECTION WARNING LIGHTS**

The chassis shall include two (2) Whelen 600 series Super LED intersection warning lights, one (1) each side. The lights shall feature multiple flash patterns including steady burn for solid colors and multiple flash patterns for split colors.

## **INTERSECTION WARNING LIGHTS COLOR**

The intersection lights shall be red.

## **INTERSECTION WARNING LIGHTS LOCATION**

The intersection lights shall be mounted on the side of the cab on the front radius.

## **SIDE WARNING LIGHTS**

The cab sides shall include two (2) Whelen 600 series Super LED warning lights, one (1) on each side. The lights shall feature multiple flash patterns including steady burn for solid colors and multiple flash patterns for split colors. The lights shall be mounted to the sides of the cab within a chrome bezel.

## **SIDE WARNING LIGHTS COLOR**

The warning lights located on the side of the cab shall be red.

## **SIDE WARNING LIGHTS LOCATION**

The warning lights on the side of the cab shall be mounted behind the rear crew door in the lowest available position.

## **SIDE AND INTERSECTION WARNING SWITCH**

The side warning lights shall be controlled through a virtual button on the Vista display and control screen. This button shall be clearly labeled for identification.

## **INTERIOR DOOR OPEN WARNING LIGHTS**

The interior of each door shall include one (1) red 4.00 inch diameter Truck-Lite LED warning light located on the door panel. Each light shall activate with a flashing pattern when the door is in the open position to serve as a warning to oncoming traffic.

## **SIREN CONTROL HEAD**

# SVI Trucks

A Whelen 295SISA1 electronic siren control head with hard wired microphone shall be mounted in the cab dash center panel in a location specified by the customer. The siren shall offer a selectable 100 or 200-watt output, radio broadcast, public address, and seventeen (17) Scan-Lock siren tones and hands free operation which shall allow the operator to turn the siren on and off from the steering wheel horn ring if a horn/siren selector switch option is also selected. The siren circuitry shall be placed behind the rocker switch panels under the electrical cover with a 30.00 inch loop for the OEM to route as desired.

## **HORN BUTTON SELECTOR SWITCH**

A virtual button on the Vista display and control panel shall allow control of either the electric horn or the electronic siren from the steering wheel horn button. The electric horn shall sound by default when the selector switch is in either position to meet FMCSA requirements.

## **AIR HORN ACTIVATION**

The air horn activation shall be accomplished by a left hand side Linemaster model SP491-S81 foot switch for the driver. An air horn activation circuit shall be provided to the chassis harness pump panel harness connector.

## **ELECTRONIC SIREN AUXILIARY ACTIVATION**

The electronic siren shall include activation by the steering wheel horn button.

## **BACK-UP ALARM**

An ECCO model 575 backup alarm shall be installed at the rear of the chassis with an output level of 107 dB. The alarm shall automatically activate when the transmission is placed in reverse.

## **INSTRUMENTATION**

An ergonomically designed instrument panel shall be provided. Each gauge shall be backlit with LED lamps. Stepper motor movements shall drive all gauges. The instrumentation system shall be multiplexed and shall receive ABS, engine, and transmission information over the J1939 data bus to reduce redundant sensors and wiring.

A twenty eight (28) icon lightbar message center with integral LCD odometer/trip odometer shall be included. The odometer shall display up to 9,999,999.9 miles. The trip odometer shall display 9,999.9 miles. The LCD message center screen shall be capable of custom configuration by the users for displaying certain vehicle status and diagnostic functions.

The instrument panel shall contain the following gauges:

One (1) three-movement gauge displaying Diesel Exhaust Fluid (DEF) level, fuel level, and electronic speedometer shall be included. The scale on the DEF and fuel level gauges shall read from empty to full as a fraction of full tank capacity. An amber indicator light shall indicate low fuel at 25% tank level. An amber indicator light shall indicate low levels of DEF, as well as a message on the LCD screen and an audible alarm. The primary scale on the speedometer shall read from 0 to 100 MPH, and the secondary scale on the speedometer shall read from 0 to 160 KM/H.

One (1) three-movement gauge displaying primary system, and secondary system air volumes and electronic tachometer shall be included. The scale on the tachometer shall read from 0 to 3000 RPM. The scale on the air pressure gauges shall read from 0 to 150 pounds per square inch (PSI) with a red line scale indicating critical levels of air pressure. The air pressure scales shall be linear to operate with an accuracy of 1 degree of the measured

# SVI Trucks

data with a red indication zone on the gauge showing critical levels of air pressure. A red indicator light in the gauge shall indicate a low air pressure, as well as a message on the LCD screen.

One (1) four-movement gauge displaying engine oil pressure, coolant temperature, voltmeter, and transmission temperature. The scale on the engine oil pressure gauge shall read from 0 to 100 pounds per square inch (PSI) with a red line zone indicating critical levels of oil pressure. The engine oil pressure scale shall be linear to operate with an accuracy of 1 degree of the measured. A red indicator light in the gauge shall indicate a low engine oil pressure, as well as a message on the LCD screen. The scale on the coolant temperature gauge shall read from 100 to 250 degrees Fahrenheit (F) with a red line zone indicating critical temperature reading. The coolant temperature scale shall be linear to operate with an accuracy of 1 degree of the measured data. A red indicator light in the gauge shall indicate high coolant temperature, as well as a message on the LCD screen. The scale on the voltmeter shall read from 9 to 18 volts with a red line zone indicating critical levels of battery voltage. A red indicator light shall indicate high or low system voltage, as well as a message on the LCD screen. The scale on the transmission temperature gauge shall read from 100 to 300 degrees Fahrenheit (F) with a red line zone indicating critical temperature reading. The transmission temperature scale shall be linear to operate with an accuracy of 1 degree of the measured data. A red indicator light in the gauge shall indicate a high transmission temperature reading, as well as a message on the LCD screen.

The light bar portion of the message center shall include twenty eight (28) LED backlit icon/decals with clear LED and colored lenses. The lightbar shall be split with fourteen (14) back lit indicators on each side of the LCD message screen. The lightbar shall contain the following backlit indicators and produce the following audible alarms when supplied in conjunction with applicable configurations:

## **RED LENS**

Stop Engine-indicates critical engine fault

Air Filter Restricted-indicates excessive engine air intake restriction

Park Brake ISO icon-indicates parking brake is set

Seat Belt ISO icon-indicates when a seat is occupied and corresponding seat belt remains unfastened

Low Coolant-indicates engine coolant is required

## **AMBER LENS**

Malfunction Indicator Lamp (MIL) ISO icon-indicates an engine emission control system fault

Check Engine ISO icon-indicates engine fault

Check Trans ISO icon-indicates transmission fault

High Transmission Temperature ISO icon-indicates excessive transmission oil temperature

ABS ISO icon-indicates anti-lock brake system fault

High exhaust system temperature ISO symbol icon

Water in Fuel ISO icon-indicates presence of water in fuel filter

\*DPF restriction ISO icon indicates a restriction of the diesel particulate filter

\*Regen Inhibit-indicates regeneration has been postponed due to user interaction

Range Inhibit-indicates a transmission operation is prevented and requested shift request may not occur.

\*SRS-indicates a problem in the supplemental restraint system

Check Message icon indicates a vehicle status or diagnostic on the LCD display requiring attention.

Check Message-Turn Signal On

Check Message-Door Ajar

Check Message-Cab Ajar

\*Check Message-ESC Active

\*Check Message-DPF Regen Active

Check Message-No Engine Data

Check Message-No Transmission Data

Check Message-No ABS Data

Check Message-No Data All Communication With The Vehicle Systems Has Been Lost

# SVI Trucks

Check Message-Check Engine Oil Level  
Check Message-Check Washer Fluid Level  
Check Message-Check Power Steering Fluid Level  
Check Message-Low Transmission Fluid Level  
Check Message-Check Coolant Level

## **GREEN LENS**

Left and Right turn signal ISO icons

\*ATC ISO icon-indicates low wheel traction for automatic traction control equipped vehicles, also indicates mud/snow mode is active for ATC system

High Idle-indicates engine high idle is active.

Cruise Control-indicates cruise control is active

OK to Pump-indicates the pump engage conditions have been met

Pump Engaged-indicates the pump is currently in use

Auxiliary Brake-indicates secondary braking device is active

## **BLUE LENS**

High Beam ISO icon

## **CLEAR LENS**

Wait to Start-indicates active engine air preheat cycle

## **AUDIBLE ALARMS FROM GAUGE PACKAGE**

High Trans Temp

High or Low Voltage

Check Engine

Check Transmission

Stop Engine

Low Air Pressure

Fuel Low

Water in Fuel

\*ESC

High Coolant Temperature

Low Engine Oil Pressure

Low Coolant Level

Low DEF Level

Air Filter Restricted

Extended Left and Right Turn Remaining On

Cab Ajar

Door Ajar

ABS System Fault

Seatbelt Indicator

## **EXTERNAL AUDIBLE ALARM**

Air Filter

Cab Ajar

Door Ajar

Check Engine

Stop Engine

Low Air Pressure

Low Engine Oil Pressure

Water in Fuel

# SVI Trucks

\*Low DEF

ABS System Fault

Seatbelt Indicator

\*Items marked with an asterisk are provided only in applicable configurations.

## **LCD MESSAGES**

Transmission Temperature

Battery Voltage

Engine Hours

Vehicle Speed

Engine RPMs

Fuel Level

DEF Level

Engine Oil Pressure

Ammeter (If equipped)

Auxiliary Ammeter (If equipped)

Engine Coolant Temp

Primary System Air Pressure

Secondary System Air Pressure

Turbo Boost Pressure

Exhaust Temperature

Engine Load

Engine Torque

Instant Fuel Economy

Average Fuel Economy

## **BACKLIGHTING COLOR**

The instrumentation gauges and the switch panel legends shall be backlit using red LED backlighting.

## **CAMERA**

An Audiovox Voyager heavy duty rearview camera system shall be supplied. One (1) box shaped camera shall be shipped loose for OEM installation in the body to afford the driver a clear view to the rear of the vehicle and one (1) camera with a teardrop shaped chrome plated housing shall be mounted on the officer side of the cab below windshield ahead of the front door at approximately the same level as the cab door handle.

The cameras shall be wired to a single Weldon Vista display located on the driver's side dash. The rear camera shall activate when the transmission is placed in reverse and the right camera shall activate with the right side turn signal. Each camera shall also be activated by a button on the Vista display.

## **CAB EXTERIOR PROTECTION**

The cab face shall have a removable plastic film installed over the painted surfaces to protect the paint finish during transport to the body manufacturer.

## **FIRE EXTINGUISHER**

A 2.50 pound D.O.T approved fire extinguisher with BC rating shall be shipped loose with the cab.

## **DOOR KEYS**

# SVI Trucks

The cab and chassis shall include a total of four (4) door keys for the manual door locks.

## **WARRANTY**

Summary of Warranty Terms:

THE FOLLOWING IS SUMMARY OF WARRANTY TERMS FOR INFORMATION ONLY. THE ACTUAL LIMITED WARRANTY DOCUMENT, WHICH IS ATTACHED TO THIS OPTION, CONTAINS THE COMPLETE STATEMENT OF THE SPARTAN MOTORS USA LIMITED WARRANTY. SPARTAN'S RESPONSIBILITY IS TO BE ACCORDING TO THE TERMS OF THE COMPLETE LIMITED WARRANTY DOCUMENT.

The chassis manufacturer shall provide a limited parts and labor warranty to the original purchaser of the custom built cab and chassis for a period of twenty-four (24) months, or the first 36,000 miles, whichever occurs first. The warranty period shall commence on the date the vehicle is delivered to the first end user.

## **CHASSIS OPERATION MANUAL**

There shall be two (2) digital copies of the chassis operation manual provided with the chassis. The digital data shall include a parts list specific to the chassis model.

## **ENGINE AND TRANSMISSION OPERATION MANUALS**

The following manuals specific to the engine and transmission models ordered will be included with the chassis in the ship loose items:

- (1) Hard copy of the Engine Operation and Maintenance manual with CD
- (1) Digital copy of the Transmission Operator's manual
- (1) Digital copy of the Engine Owner's manual

## **CAB/CHASSIS AS BUILT WIRING DIAGRAMS**

The cab and chassis shall include two (2) digital copies of wiring schematics and option wiring diagrams.

## **PAINT CONFIRMATION**

There shall be a paint confirmation letter sent to the body manufacturer with paint spray outs to confirm the cab primary paint color or primary and secondary paint color as specified by the paint options.

## **SHOP NOTES**

List: \$232,141.00

Discount: -11%

Net Price: \$206,605.00

F. Axle Weight:

R. Axle Weight:

# SVI Trucks

## **CAB TO AXLE DIMESION**

Cab to axle will be 148".

## **CAB/CHASSIS PREPAYMENT**

The specified cab/chassis shall be prepaid by Henderson Fire Department within 30 days of invoice. Henderson Fire Department understands that if payment is made after 30 days, additional interest charges may apply.

## **CHASSIS MODIFICATIONS**

## **LUBRICATION AND TIRE DATA PLATE**

A permanent label in the driving compartment shall specify the quantity and type of the following fluids used in the vehicle and tire information:

- Engine oil
- Engine coolant
- Chassis transmission fluid
- Pump transmission lubrication fluid . . (if applicable)
- Pump priming system fluid, if applicable . . (if applicable)
- Drive axle(s) lubrication fluid
- Air conditioning refrigerant . . (if applicable)
- Air conditioning lubrication oil . . (if applicable)
- Power steering fluid
- Cab tilt mechanism fluid . . (if applicable)
- Transfer case fluid . . (if applicable)
- Equipment rack fluid (if applicable)
- CAFS air compressor system lubricant . . (if applicable)
- Generator system lubricant . . (if applicable)
- Front tire cold pressure
- Rear tire cold pressure
- Maximum tire speed ratings

## **VEHICLE DATA PLATE**

A permanent label in the driving compartment which indicates the following:

- Filter part numbers for the;
  - Engine
  - Transmission
  - Air
  - Fuel
- Serial numbers for the;
  - Engine
  - Transmission
- Delivered Weights of the Front and Rear Axles
- Paint Brand and Code(s)
- Sales Order Number

# SVI Trucks

## **OVERALL HEIGHT, LENGTH DATA PLATE (US)**

The fire apparatus manufacturer shall permanently affix a high-visibility label in a location visible to the driver while seated.

The label shall show the height of the completed fire apparatus in feet and inches, the length of the completed fire apparatus in feet and inches, and the GVWR in pounds.

Wording on the label shall indicate that the information shown was current when the apparatus was manufactured and that, if the overall height changes while the vehicle is in service, the fire department must revise that dimension on the plate.

# SVI Trucks

## **PERSONNEL CAPACITY**

A label that states the number of personnel the vehicle is designed to carry shall be located in an area visible to the driver.

## **SEAT BELT WARNING - FAMA06/07**

A safety sign FAMA06 shall be visible from each seat that is not equipped with occupant restraint and therefore not intended to be occupied while the vehicle is in motion.

A safety sign FAMA07, which warns of the importance of seat belt use, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

## **EQUIPMENT MOUNTING FAMA10**

A safety sign FAMA10, which warns of the need to secure items in the cab, shall be visible inside the cab.

## **FIRE SERVICE TIRES - FAMA12**

A safety sign FAMA12, which warns of the special requirements for fire service-rated tires, shall be visible to the driver entering the cab of any apparatus so equipped.

## **HELMET WARNING - FAMA15**

A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

## **CLIMBING METHOD - FAMA23**

A safety sign FAMA23, which warns of the proper climbing method, shall be visible to personnel entering the cab and at each designated climbing location on the body.

## **REAR STEP CROSSWALK WARNING - FAMA24**

A safety sign FAMA24, which warns personnel not to ride on the vehicle, shall be located at the rear step areas and at any cross walkways.

## **FINAL STAGE MANUFACTURER VEHICLE CERTIFICATION**

A final stage manufacturer vehicle certification label shall be provided and installed in the driver cab door jamb area.

## **FRONT BUMPER**

The front bumper shall be as provided by the cab/chassis manufacturer. No other alteration or modifications are required to extension length.

## **BUMPER GRAVELSHIELD**

The bumper extension gravel shield shall be provided by the cab/chassis manufacturer.

# SVI Trucks

## **AIR HORN(S)**

The air horn(s) shall be supplied and installed by the cab/chassis manufacturer.

## **FRONT TOW PROVISIONS**

The front tow provisions shall be supplied and installed by the cab/chassis manufacturer.

## **AIR INTAKE SYSTEM**

An air filter shall be provided in the engine's air intake system.

Air inlet restrictions shall not exceed the engine manufacturer's recommendations.

The air inlet shall be equipped with a means of separating water and burning embers from the air intake system.

This requirement shall be permitted to be achieved by either of the following methods:

1. Provision of a device such that burning particulate matter larger than 0.039 in. (1.0 mm) in diameter cannot reach the air filter element.
2. Provision of a multi screen ember separator capable of meeting the test requirements defined in the Parker Hannafin, Racor Division, publication LF 1093-90, *Ember Separation Test Procedure*, or an equivalent test.

## **EXHAUST**

The existing exhaust tailpipe shall be extended to ahead of the rear axle on the streetside.

The exhaust piping and discharge outlet shall be located or shielded so as not to expose any portion of the apparatus or equipment to excessive heating.

Exhaust pipe discharge shall be directed away from any operator's position.

Where parts of the exhaust system are exposed so that they are likely to cause injury to operating personnel, protective guards shall be provided.

## **GPS / OPTICOM ANTENNA INSTALLATION**

There shall be one (1) **FD Supplied Opticom/GPS antenna installed** on the roof of the cab/chassis. The end of each radio antenna shall be routed to a location determined by the Henderson Fire Department.

### SHOP NOTES

Install FD Opticom/GPS antenna

## **MDT ANTENNA INSTALLATION**

There shall be one (1) **FD supplied MDT antenna will be installed on the cab roof**. The end of antenna shall be routed to a location determined by the Henderson Fire Department.

Due to multiple configurations of antenna whips, the Manufacturer shall provide the antenna base, and Henderson Fire Department shall provide the whip.

# SVI Trucks

## SHOP NOTES

Install FD supplied MDT antenna

### **RADIO/ANTENNA INSTALLATION**

There shall be two (2) Henderson Fire Department supplied **APX 6500 radios** with antenna installed in the cab within easy reach of driver. The location of radio shall be determined by the Henderson Fire Department at the pre-construction meeting. All required radio programming shall be responsibility of Henderson Fire Department. Radio(s) may not be fully tested if no radio program is provided with radio and will be responsibility of Henderson Fire Department after delivery.

Radio shall be installed per Manufacturer's requirements and wired for proper 12 volt power and ground.

## SHOP NOTES

APX 6500 radios

### **MDT DOCK INSTALLATION**

There will be one (1) **FD supplied Gambler Johnson MDT dock installed in the cab**. The exact location will be finalized at the pre-construction meeting.

## SHOP NOTES

Installl FD supplied MDT dock

### **SEAT BELT COLOR**

Section 14.1.3.4 of the NFPA 1901 Standards, 2009 edition, requires all seat belt webbing in cab to be bright red or bright orange in color, and the buckle portion of the seat belt shall be mounted on a rigid or semi rigid stalk such that the buckle remains positioned in an accessible location.

### **SEAT BELT WEB LENGTH - CUSTOM CAB**

Sections 14.1.3.2 and 14.1.3.3 of the NFPA 1901 standards, 2009 edition, require the effective seat belt web length for a Type 1 lap belt for pelvic restraint to be a minimum of 60", and a Type 2 pelvic and upper torso restraint-style seat belt assembly to be a minimum of 110".

The chassis seat belt web length as supplied by the custom chassis manufacturer shall be compliant to NFPA Standards 14.1.3.2 and 14.1.3.3.

### **SEAT BELT / VDR SYSTEM - CUSTOM CAB**

The seat belt warning and vehicle data recorder systems shall be provided by the cab/chassis manufacturer.

### **HELMET STORAGE**

No helmet storage is required in the cab driving area.

### **HELMET STORAGE**

No helmet storage is required in the cab crew area.

# SVI Trucks

## **CAB CRASH TEST CERTIFICATION**

A cab crash test certification from the fire apparatus manufacturer shall be provided with the equipment. A copy of this certification shall be included with the bid.

NOTE: There shall be no exception to any portion of the cab integrity certification requirements. Nonconformance shall lead to immediate rejection of bid.

The certification shall state that the cab does meet or exceed the requirements below:

- 1) European Occupant Protection Standard ECE Regulation No. 29.
- 2) SAE J2422 Cab Roof Strength Evaluation - Quasi-Static Loading Heavy Trucks.

## **CAB MIRRORS, DRIVER ADJUSTABLE**

Section 14.3.5 of the NFPA 1901 Standards, 2009 edition, requires all primary rear view mirrors used by the driver to be adjustable from the driver's position.

## **MUDFLAPS**

There shall be 1/4" rubber mudflaps provided and installed behind each set of tires to prevent throwing road debris and lower road spray.

## **AIR BRAKE SYSTEM QUICK BUILD-UP**

The air brake quick build-up system shall be supplied from the cab/chassis manufacturer.

The quick buildup system shall provide sufficient air pressure so that the apparatus has no brake drag and is able to stop under the intended operating conditions following the 60-second buildup time.

## **ROAD EMERGENCY SAFETY KIT**

One (1) set of three (3) dual faced triangular warning flares with fold away base complete with storage case per DOT requirements shall be provided with the completed apparatus.

One (1) 2.5 lb. ABC type vehicle fire extinguisher with bracket per DOT requirements shall be provided and mounted inside cab area.

## **REAR CAB DESK LAYOUT**

### **REAR CAB DESK - "L" SHAPED**

The rear portion of cab shall be provided with an "L" shaped desk extending from the curbside to streetside directly behind the driver and officer and extending to the rear wall of the cab on the streetside.

The section directly behind the driver and officer shall be approximately 26" deep and located 30" from the floor. The streetside extension shall be approximately 18" deep and located 30" from the floor.

The desk top surface shall be fabricated of 3/16" smooth finish aluminum. There shall be 2-1/2" diameter holes with plastic edge grommets provided at each rear corner for wiring of future equipment located on the desk top.

# SVI Trucks

The desk top shall be painted dark gray with a hammer tone powder coat paint finish for a hard and durable surface.

## **DESKTOP COMPONENT CONSOLE**

There shall be a console at top rear of the desk for optional component mounting. The console shall be fabricated from 1/8" aluminum approximately 6" high x 9" deep with a 6" sloping component mounting face. The console shall be painted dark gray with a hammer tone powder coat paint finish for a hard and durable surface.

The sloped component mounting surface shall be a one-piece hinged cover to allow access to optional components, and wiring and held closed with knurled thumb type latch in each corner.

There shall be two (2) radio(s) mounted in the front face of the component console

There shall be four (4) data port(s) provided in the front face of the component console.

There shall be two (2) two-gang 12 VDC outlet(s) provided in the front face of the component console.

There shall be four (4) 120 VAC, 20 amp, duplex straight-blade receptacle (NEMA 5-20R) outlet(s) provided in the front face of the component console.

There shall be four (4) USB port(s) provided in the front face of the component console connected to specified on-board computer system.

## **MAP LIGHT**

There shall be two (2) 19" goose neck 12 volt map light(s) furnished and installed on the back edge of the desk top and or desk top console.

## **CAB INTERIOR CABINET - OVERHEAD**

There shall be two (2) overhead cabinet(s) provided on interior. Cabinet(s) shall be constructed of 1/8" smooth finish aluminum, and painted with a dark gray hammer tone powder coat paint finish for a hard durable surface. Each cabinet shall be approximately 14" high x 14" deep x 26" wide. If cab is specified with air bags, the interior cabinet(s) will be mounted clear of the deployment area.

### **SHOP NOTES**

size to hold 3-ring binder

The above cabinet(s) shall have lift-up type door(s) with dry-erase outer surface.

## **INTERIOR UNDER CABINET LED LIGHTS**

Two (2) OnScene Solution model #70152, 10" x 6" x 7/8", 10-30 VDC, surface mount dual red and white LED light(s) with clear lens shall be provided under cabinet. Each light shall be individually switched with a high/low intensity setting. In addition light(s) will be capable of a 5 second delay after switching off.

## **INTERIOR PEDESTAL SEAT**

Two (2) Valor G2 Mangnus ABTS seat with dual armrest, swivel, 6" vertical height adjustment, reclining back and mechanical lumbar support. The seat fabric will be black in color.

# SVI Trucks

The seat(s) shall be provided with a 3-point type automotive ABTS seat belt and shall be red in color. The seat belt(s) shall be secured to the attachment points provided on each seat. Each seat shall be wired to the on-board seat belt indicator, and Vehicle Data Recorder (VDR) systems per NFPA 1901.

## SHOP NOTES

Valor Seat see Blair S for quote

- There shall be one (1) 120 VAC outlet(s) located under desk against the back edge.
  - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
- There shall be one (1) approximate 4' long 120 VAC outlet strip(s) with straight blade household type outlets provided.
  - Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.

## **CAB INTERIOR CABINET - CURBSIDE REAR WALL**

If cab is specified with air bags, the interior cabinet(s) will be mounted clear of the deployment area.

There shall be one (1) full height cabinet located in rear cab area. The cabinet shall be fabricated from 1/8" smooth aluminum, and shall have two (2) vertically hinged double doors. The cabinet shall have one permanent horizontal divider to create an upper and lower storage area. The cabinet and doors shall be finished with a dark gray hammer tone powder coat paint for a hard and durable finish. The cabinet shall be approximately 23" wide x cab interior height (less 3") x 21" deep.

- Cabinet shall be provided with vertically mounted shallow aluminum Shelf-Trac for specified component installation.
- There shall be one (1) adjustable shelf/shelves in the above cabinet(s). Each shelf shall have a 1.25" vertical lip at front to contain items while vehicle is in motion.
- There shall be one (1) 120 VAC outlet(s) located inside cabinet against the back wall.
  - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
- There shall be one (1) approximate 4' long 120 VAC outlet strip(s) with straight blade household type outlets provided.
  - Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.

## **CAB MISCELLANEOUS EQUIPMENT**

The following items shall be provided in cab as follows;

### **MAGNETIC WHITEBOARD**

# SVI Trucks

There shall be two (2) magnetic whiteboard(s), approximately 30" wide x 36" tall located on wall, location per Henderson Fire Department.

## **AIR CONDITIONER - HEATER**

One (1) Dometic Penguin low profile, 120 VAC, 60 cycle, single phase air conditioner(s) shall be provided and installed on the cab roof. The unit shall be a roof top contemporary contoured integral evaporator/condenser type with built-in heating elements.

Each unit shall be rated at minimum of 13,500 BTU cooling capacity with a heating element rated at 5,600 BTU.

A three-speed fan shall supply a maximum/minimum of 335/250 cfm air flow capacity.

The roof mounted air conditioner shall be approximately 9.5" high x 29" wide x 40" long and weigh approximately 96 pounds.

The unit will have a cab wall mounted thermostat control.

The unit will be wired to the shower power inlet and the onboard generator.

### SHOP NOTES

Add thermostat control. Wired A/C to shore power and gen.

## **FUEL FILL**

There shall be one (1) fuel fill door located in the streetside exterior wheel well panel, behind the rear axle. The fill door shall be fabricated from brushed stainless steel. There shall be a permanent label with the text "DIESEL FUEL ONLY" located adjacent to the fuel fill access.

## **BODY DESIGN**

The importance of public safety associated with emergency vehicles requires that the construction of this vehicle meet the following specifications. These specifications are written to establish the minimum level of quality and design. All Bidders shall be required to meet these minimum requirements.

It is the intent of these specifications to fully describe the requirements for a custom built emergency type vehicle. In order to extend the expected service life of this vehicle, the body module shall be removable from the chassis frame and be capable of being installed on a new chassis.

The sheet metal material requirements, including alloy and material thickness, throughout the specifications are considered to be a minimum. Since such materials are available to all Manufacturers, the material specifications shall be strictly adhered to.

The fabrication of the body shall be formed sheet metal. Formed components shall allow the Henderson Fire Department to have the body repaired locally in the case where any object has struck the body and caused damage. The use of proprietary extrusions will prevent the Henderson Fire Department from such repair and shall NOT be used.

Following construction of the subframe, which supports the apparatus body, the sheet metal portion of the body shall be built directly on the subframe. The joining of the subframe and body shall be of a welded integral

# SVI Trucks

construction.

The sheet metal fabrication of the body shall be performed using inert gas continuous feed welders only. The entire body shall be welded construction. The use of pop rivets in any portion of structural construction may allow premature failure of the body structure. Therefore, pop rivets shall NOT be used in the construction of the structural portions of the body. This includes side body sheets, inner panels of compartment doors, and any other structural portions of the body.

## **EXTERIOR ALUMINUM BODY**

The fabrication of the body shall be constructed from aluminum 3003H-14 alloy smooth plate. This shall include compartment front panel, vertical side sheets, side upper rollover panels, rear panels and compartment door frames.

The body compartment floors and exterior panels shall be constructed with not less than 3/16" (.187) aluminum 3003H-14 smooth plate. Interior compartment dividing walls shall be constructed with not less than 1/8" (.125) aluminum 3003H-14 smooth plate. Lighter gauge sheet metal will not be acceptable in these areas, No Exceptions.

The front and rear corners of body shall be formed as part of the front or rear body panels. This provides a stronger body corner and finished appearance. The use of extruded corners, or caps will not be acceptable, No Exceptions.

The door side frame openings shall be formed "C" channel design. An electrical wiring conduit raceway running the full length of exterior compartments shall be provided. This raceway shall contain all 12 volt wiring running to the rear of the apparatus, permitting easy accessibility to wiring.

Individual compartment modules, with dead air space voids between compartments, will not be an acceptable method of compartment construction.

The compartments shall be an integral part of the body construction. Compartment floors from front of body to ahead of rear axle, also from rear axle to rear of body shall be single one-piece sections. Compartment floors shall be preformed, then positioned in body and welded into final position.

Compartment floors shall have a "sweep-out" design with door opening threshold positioned lower than compartment floor, permitting easy cleaning of compartments. Angles, lips, or door moldings are not acceptable in the base of compartment door opening. One-way rubber drain valves shall be provided in compartment floors so that a water hose may be used to flush-out compartment area.

All exterior seams in sheet metal below frame, and around the rear wheel well area shall be welded and caulked to prevent moisture from entering the compartments. All other interior seams and corners shall be sealed with silicone based caulk prior to painting.

Only stainless steel bolts, nuts, and sheet metal screws shall be used in mounting exterior trim, hardware and equipment.

## **DRIP RAILS**

# SVI Trucks

The body shall have drip rails over the side full height compartments. The drip rails shall be formed into the upper body panels providing a ridged lower panel and a flat upper body panel surface. The use of mechanically fastened, taped or glued on drip rails will not be acceptable, No Exceptions.

## **ROOF CONSTRUCTION**

The roof shall be integral with the body and shall be all welded construction. The roof shall be constructed from 3/16" (.188) aluminum 3003H-14 alloy treadplate and supported with 2" x 2" x 1/4" tubing running the full width of the body. The supports shall be welded in place on approximate 16" centers.

All seams in the roof area shall be welded to the radius and supports prior to paint to prevent entry of moisture. All roof seams shall be continuously welded.

A 2" formed radius shall be provided along the body sides. The use of extrusions will not be acceptable, No Exceptions.

## **BODY SUBFRAME**

The chassis frame rails shall be fitted with 1/4" custom extruded UHMW polyethylene rail cap to isolate the body frame members from direct contact with chassis frame rails.

The body subframe shall be constructed from 6061T6 aluminum alloy tubing. Subframe shall consist of two (2) 2" x 6" x 1/4" aluminum tubes, the same width as the chassis frame rails, NO EXCEPTION. Welded to this tubing shall be cross members of 2" x 6" x 1/4" aluminum. These cross members shall extend the full width of the body to support the compartments. Cross members shall be located at front and rear of the body, below compartment divider walls, and in front and rear of wheel well opening. Additional aluminum cross members shall be located on 16" centers, or as necessary to support walkway or heavy equipment.

To form the frame, the tubing shall be beveled and welded at each joint using 5356 aluminum alloy welding wire.

## **BODY MOUNTING**

The body subframe shall be fastened to the chassis frame with a minimum of six (6) spring loaded body mounts. Each mount shall be configured using a two-piece encapsulated slide bracket. The two (2) brackets shall be fabricated of heavy duty 1/4" thick steel and shall have a powder coat finish to prevent any corrosion. Each mounting assembly shall utilize two (2) 3/4" diameter x 6" long grade 8 bolts and two (2) heavy duty springs. The assembly design shall allow the body and subframe to act as one (1) component, separate from the chassis. As the chassis frame twists under driving conditions, the spring mounting system shall eliminate any stress from being transferred into the body. The spring loaded body mounts shall also prevent frame side rail or body damage caused by unevenly distributed stress and strains due to load and chassis movement.

Body mountings that do not allow relief from chassis movement will not be acceptable.

## **18" REAR STEP BUMPER**

The full width rear bumper shall be constructed from 2" x 2" x 1/4" aluminum tubing frame and covered with 3/16" NFPA compliant aluminum tread plate. The bumper shall extend from the rear vertical body panel 18" and provide a rear step with a minimum of 1/2" space at body for water drainage.

# SVI Trucks

## **REAR TOW EYES**

There shall be two (2) heavy duty rear mounted tow eyes securely attached to the body subframe, below the apparatus body. The tow eyes shall be fabricated from 3/4" thick steel plate and shall have a black powder coat finish.

## **GROUND LIGHTS**

There shall be two (2) OnScene 8" Access LED lights installed below bumper capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting shall be switchable but activated automatically when the vehicle park brake is set.

## **WHEEL WELL EXTERIOR PANEL**

The exterior panel of the body wheel well enclosure shall be constructed from 3/16" smooth aluminum panels.

## **STAINLESS STEEL BODY FENDERS**

The body wheel well openings shall be provided with round radius, **polished stainless steel fenderettes**. The fenderettes shall be bolted and easily replaceable if damaged. The fenderettes shall be installed using a rubber gasket to reduce buildup of moisture and/or debris.

## **WHEEL WELL LINERS**

The wheel wells shall be provided with an easily removable polymer, circular inner fender liner. The inner liner shall be bolted to the wheel well with stainless steel bolts and spaced away from the wheel well so the liner will not accumulate dirt or water.

## **SCBA CYLINDER COMPARTMENTS**

There shall be three (3) SCBA cylinder storage compartments, two (2) on the curbside and one (1) on the streetside of the body in the rear wheel well area. Each compartment shall have a brushed SST door assembly with a positive catch latch. Each compartment shall have a 8" diameter tube behind the wheel well panel attached to the door assembly. Each compartment shall allow the storage of an SCBA cylinder or a fire extinguisher up to 7-3/4" in diameter and 22" deep. The door shall activate the "Hazard Warning Light" in the cab when not in the closed position.

## **BODY PAINT SPECIFICATIONS**

### **BODY PAINT PREPARATION**

After the body and components have been fabricated they shall be disassembled so when vehicle is complete there shall be finish paint beneath the removable components. The body shall be removed from chassis during the paint process to insure proper paint coverage. The body and components shall be metal finished as follows to provide a superior substrate for painting.

The exterior (and interior, if painted) body shall undergo a thorough cleaning process starting with a biodegradable phosphoric acid solution to begin the etching process followed by a complete clear water rinse.

# SVI Trucks

The next step shall consist of a chemical conversion coating applied to seal the metal substrate and become part of the metal surface for greater film adhesion.

All bright metal fittings, if unavailable in stainless steel or polished aluminum, shall be chrome plated. Iron fittings shall be copper under plated prior to chrome plating.

## **PAINT PROCESS**

The paint process shall follow the strict standards set forth by PPG Industries guidelines. Painters applying PPG products will be PPG Certified Commercial Technicians, and re-certified every two (2) years. The body shall go through the following paint process;

- 1) Clean bare metal with a wax and grease remover using low lint rags.
- 2) Inspect, straighten, and hammer high points, grind all seams, sharp edges, and welds. DA sand entire paintable surfaces using 24-180 grit dry paper. Plastic fill all low spots and DA sand fill areas using 36-180 grit dry paper. Apply pinhole filler and DA sand areas using 80-180 grit dry paper.
- 3) Re-clean bare metal using a wax and grease remover and low lint rags.
- 4) Within 24 hours, a PPG Delfleet® epoxy color primer with proper hardener for corrosion resistance using a pressure pot spray gun and applying 2-5 full wet coats or 1.5-8.0 dry mils max. achieving full hiding and allow to air dry 60 minutes @ 70°F or bake for 45 minutes @ 140°F degree.
- 5) Inspect, putty fill, and dry guild coat entire body surface and DA sand using 180-400 grit dry paper.
- 6) Re-clean bare metal using a wax and grease remover using low lint rags.
- 7) A PPG Delfleet® primer sealer with proper hardener and thinner shall be sprayed using a pressure pot spray gun and applying 1 full wet coat or 1.0-2.0 dry mils achieving full hiding and allow to flash off in spray booth for minimum of 60 minutes @ 70°F.
- 8) A PPG Delfleet® FBCH basecoat (color) with proper hardener and dry additive shall then be sprayed using a pressure pot set @ 45-60 PSI and achieving full hiding or 1.5-2.0 wet mils and allow to flash off in spray booth 45-60 minutes before applying clearcoat.
- 9) A PPG Delfleet® clearcoat with proper hardener and thinner shall be sprayed using a pressure pot spray gun and applying 2-3 full wet coats or 5.0 wet mils for a uniform gloss and allow to flash off in spray booth 10 minutes and bake for 120-140 minutes @ 125°F (surface temp.).
- 10) After cooling, DA sand heavy orange peel or runs using 1000 grit dry sand paper and final DA sand using 1500-2000 grit dry sand paper. Wipe off all surfaces to remove dust and debris. Buff unit as needed using 3M rubbing compound and a white wool pad and inspect until all sand scratches are removed.
- 11) Polish as needed using 3M Perfect-It-Polish and a black foam pad, repeat as necessary and inspect until all sand scratches are removed.

## **PAINT - ENVIRONMENTAL IMPACT**

The contractor shall meet or exceed all current State (his) regulations concerning paint operations. Pollution control shall include measures to protect the atmosphere, water and soil. PPG Delfleet® Evolution paint shall be free of all heavy metal (lead & chromate) components. Paint emissions from sanding and painting shall be filtered and collected. All paint wastes shall be disposed of in an environmentally safe manner. Solvents used in cleanup operations shall be collected, sent off-site for distillation and returned for reuse.

## **FASTENERS**

Prior to the assembly and reinstallation of exterior components; i.e. warning and DOT lights, handrails, steps, door hardware, and miscellaneous items, a Mylar isolation tape, or gasket shall be used to prevent damage to the finish painted surface. These components shall be fastened to body using either a plastic insert into body metal

# SVI Trucks

with stainless steel screws or zinc coated nut-serts into body surface using stainless steel bolts to prevent corrosion from dissimilar metals.

## **ELECTROLYSIS CORROSION CONTROL**

The vehicle shall be assembled using ECK brand or similar corrosion control compound on all high corrosion potential areas.

ECK protects aluminum and stainless steel against electrolytic reaction, isolates dissimilar metals and gives bedding protection for hardware and fasteners. ECK contains anti-seizing lubricant for threads. ECK is dielectric and perfect for use with electrical connectors.

## **PAINT FINISH - SINGLE COLOR**

The body shall be painted with a single color of PPG Delfleet® Evolution per Henderson Fire Department approved paint spray out provided.

A small touch-up bottle of paint shall be provided with completed vehicle.

- Paint Color: Match cab/chassis supplied paint color.

## **BODY UNDERCOATING**

The entire underside of body shall be sprayed with black automotive undercoating. Undercoating shall cover all areas underside of body and wheel well area to help prevent corrosion under the vehicle.

## **UNDERCOAT WARRANTY**

The body undercoating shall have a warranty provided by the manufacturer for the lifetime of the vehicle or twenty (20) years, whichever occurs first. The warranty shall be transferable between vehicle owners. Should the undercoating material applied to the underside of the body and wheel wells of the vehicle ever flake off, peel, chip or crack due to drying out, the damaged area shall be re-sprayed without charge to the vehicle owner.

## **PAINT WARRANTY**

The vehicle shall be provided with a ten (10) year non-prorated warranty to the original owner. Warranty is provided by PPG Inc. A warranty sheet with all conditions and maintenance procedures shall be provided with the delivered vehicle. **Pro-rated warranties will not be acceptable.**

## **COMPARTMENT INTERIOR FINISH**

The interior of all exterior body compartments shall be a "Maintenance Free" smooth unpainted finish. All body seams shall be finished with a caulk sealant for both appearance and moisture protection.

## **REFLECTIVE STRIPE REQUIREMENTS**

### Material

All retroreflective materials shall conform to the requirements of ASTM D 4956, *Standard Specification for Retroreflective Sheeting for Traffic Control*, Section 6.1.1 for Type I Sheeting.

# SVI Trucks

All retroreflective materials used that are colors not listed in ASTM D 4956, Section 6.1.1, shall have a minimum coefficient of retroreflection of 10 with observation angle of 0.2 degrees and entrance angle of -4 degrees.

Any printed or processed retroreflective film construction used shall conform to the standards required of an integral colored film as specified in ASTM D 4956, Section 6.1.1.

## Minimum Requirements

A retroreflective stripe(s) shall be affixed to at least 50 percent of the cab and body length on each side, excluding the pump panel areas, and at least 25 percent of the width of the front of the apparatus.

The stripe or combination of stripes shall be a minimum of 4 in. (100 mm) in total width.

The 4 in. (100 mm) wide stripe or combination of stripes shall be permitted to be interrupted by objects (i.e., receptacles, cracks between slats in roll up doors) provided the full stripe is seen as conspicuous when approaching the apparatus.

## **GRAPHICS PROOF**

A color graphics proof of the reflective striping layout shall be provided for approval by Henderson Fire Department prior to installation. The graphics proof shall be submitted to Henderson Fire Department on 8.5" x 11" sheets with front, sides, rear and plan views, each on one (1) sheet. In addition if there is any special art work an additional sheet shall be provided showing all details.

## **REFLECTIVE STRIPE - CAB SIDE**

The reflective stripe material shall be 6" wide, 3M Scotchcal 680 series.

- This reflective stripe shall be white in color.

There shall be a 1" Scotchcal reflective stripe located 1" above and a second 1" Scotchcal reflective stripe located 1" below the main stripe.

- This reflective stripe shall be white in color.

## **REFLECTIVE STRIPE - CAB FRONT**

The reflective stripe material shall be 6" wide, 3M Scotchcal 680 series.

- This reflective stripe shall be white in color.

There shall be a 1" Scotchcal reflective stripe located 1" above and a second 1" Scotchcal reflective stripe located 1" below the main stripe.

- This reflective stripe shall be white in color.

## **REFLECTIVE STRIPE - CAB DOOR INTERIOR**

Any door of the apparatus designed to allow persons to enter or exit the apparatus shall have at least 96 in.2 (62,000 mm2) of retroreflective material affixed to the inside of the door.

# SVI Trucks

The stripe material shall be 3M Scotchlite 680.

- This reflective stripe shall be white in color.

## **REFLECTIVE STRIPE - BODY SIDES**

The reflective stripe material shall be 6" wide, 3M Scotchcal 680 series.

- This reflective stripe shall be white in color.

There shall be a 1" Scotchcal reflective stripe located 1" above and a second 1" Scotchcal reflective stripe located 1" below the main stripe.

- This reflective stripe shall be white in color.

The stripe shall remain in a straight line from the front of the front of cab to the rear body.

## **CHEVRON REFLECTIVE STRIPE - REAR SIDES PANELS**

At least 50 percent of the rear-facing vertical surfaces, visible from the rear of the apparatus, excluding any pump panel areas not covered by a door, shall be equipped with retroreflective striping in a chevron pattern sloping downward and away from the centerline of the vehicle at an angle of 45 degrees. Each stripe shall be 6" width.

The rear side panels of the body on each side of a rear stairway or compartment shall have a chevron style reflective stripe, extending from bumper height up to side compartment drip rail height. Each chevron panel shall be a full sheet and shall have a 3M UV over laminate to protect from UV rays, scene damage, and everyday use. Chevron panel shall have a minimum 10 year warranty for material failure, and colorfastness.

The stripe material shall be 3M Diamond Grade.

This reflective chevron stripe shall alternate red and fluorescent yellow-green in color.

## **LETTERING**

No lettering shall be provided on the completed unit.

## **EXTERIOR COMPARTMENT DOORS**

### **ROLL-UP DOOR CONSTRUCTION - ROBINSON (ROM)**

The apparatus shall be equipped with Robinson ROM Series III roll-up exterior compartment doors. Robinson roll-up doors shall be complete with the following features;

- Doors shall be front roll with drum positioned at upper front portion of compartment to afford maximum clearances and head room for mounting equipment to ceiling of compartment
- There shall be a non-abrasive side brush seals
- Every slat must have interlocking end shoes to prevent slat from moving side-to-side and binding the door
- Between each slat must be a co-extruded PVC inner seal to prevent metal-to-metal contact and to repel moisture. This inner seal is not visible to detract from appearance of door
- Slat are to have interlocking joints with a folding locking flange to provide security and prevent penetration by sharp objects

# SVI Trucks

- Slats to be double-wall extrusion 1.366" high by .315" thick. Exterior surface to be flat and interior surface to be concave to prevent loose equipment from interfering with door operation
- Latch system to be a full width one piece lift bar operable by one hand
- A 2" wide finger pull integrated into bottom rail extrusion for easy one hand opening and closing
- Clip system that connects the curtain slats to the operator drum which allows for easy tension adjustment without tools
- Each roll-up door shall have a 4" diameter counterbalance operator drum to assist in lifting the door.
- Track shall be one-piece aluminum that has an attaching flange and finishing flange incorporated into its design
- Drip rail will have specially designed seal that prevents the seal from scratching the door
- Bottom rail extrusion must have smooth back to prevent loose equipment from jamming the door
- Bottom rail to have "V" shaped double seal to prevent water and debris from entering the compartment
- Standard replacement parts to be shipped from the United States and available in as little as 48 hours
- Will be free from manufacturing defects for a period of up to 7 years from date of purchase provided that the Product is used under conditions of normal use, that regular periodic maintenance and service is performed and that the product was installed in accordance with R•O•M's instructions.

Each roll-up door framework shall decrease the compartment door opening by approximately 2.25" and 4.5" in height for standard bottom rail and 6.0" in height for tall bottom rail option.

## **ROM DOOR BOTTOM RAIL**

All exterior compartment doors shall have the standard 3.0" tall bottom rail extrusion for easy one (1) hand opening and closing.

The specified retroreflective stripe material shall be applied on the roll-up compartment doors. The stripe shall be precision machine cut for each door slat of the roll-up doors. Under no circumstance will the stripe material be cut on roll-up door surface.

## **BODY HEIGHT MEASUREMENTS**

The vertical body dimensions shall be as follows:

### **AHEAD OF REAR AXLE**

	<u>Description</u>	<u>Dimension</u>
A	Bottom of Subframe to Top of Body	88.7"
B	Bottom of Subframe to Bottom of Body	22.5"
C	Total Body Height	111.2"
D	Compartment Height Above Frame	48.0"
E	Compartment Height Below Frame	25.0"
F	Vertical Door Opening:	
	-with roll-up door	65.0"
	-with hinged door	68.0"

### **ABOVE REAR AXLE**

	<u>Description</u>	<u>Dimension</u>
G	Vertical Door Opening - Above Rear Wheel	
	-with roll-up door	34.0"
	-with hinged door	37.0"

### **BEHIND REAR AXLE**

# SVI Trucks

	<u>Description</u>	<u>Dimension</u>
H	Bottom of Subframe to Bottom of Body	20.0"
I	Compartment Height Above Frame	48.0"
J	Compartment Height Below Frame	22.5"
K	Vertical Door Opening:	
	-with roll-up door	62.0"
	-with hinged door	65.0"

## GENERAL

	<u>Description</u>	<u>Dimension</u>
L	Top of Body to Bottom of Drip Rail	38.5"

(Dimensions are approximate and subject to change during construction or design process.)

## **FIVE (5) UPPER BODY COMPARTMENTS (OPEN)**

The forward transverse compartment shall be 90.0" long x 27.0" wide x 33.5" deep. There shall be four (4) compartments parallel to the sides of the body, two (2) on each side. Each of these compartments shall be 74.0" long x 28.0" wide x 33.5" deep. The side compartments shall be open under each door sill to allow for long equipment. Each compartment shall be integral with the body construction, and will not be bolted or add-on modules. The outside walls of each compartment will be double walled to prevent equipment from denting the outside painted surface.

Each compartment shall have a lift-up type compartment door hinged on the outboard side. Each door shall be fabricated from 3/16" aluminum tread plate. Each door shall have two (2) pneumatic type cylinders, one (1) at each end, attached to cast aluminum brackets mounted to the interior surface of the door to hold the door in both the opened and closed positions. Each door shall be mounted using multiple 16" long, equally spaced, 14 gauge stainless steel hinges, with 1/4" stainless steel pin. A polyester barrier film gasket shall be placed between stainless steel hinge and the body mounting surface as necessary to prevent corrosion caused by dissimilar metals.

Each compartment door shall overlap a 2" vertical lip on the body roof to prevent entry of moisture and sealed with automotive type rubber molding to provide a weather resistant seal.

Each roof compartment door shall have a chrome 7" handle bolted to center of each door.

Each compartment shall have a 13/16" drain hole located in floor of compartment with a 1" flexible drain tube that terminates below body.

Each compartment shall have a horizontally mounted OnScene Solutions LED light on the underside of the door. The light and NFPA door ajar system shall be automatically activated by an individual switch per compartment.

The hinged door(s) shall have an automotive tailgate style lift-up locking handle. A gasket shall be placed between the handle and the compartment exterior wall. Door latches shall be a single point, double-catch latch, mounted on the interior wall of the compartment panel.

## **SIDE ROOF COMPARTMENT - SHELF TRAC**

There shall be four rows; two (2) rows each side of horizontally mounted aluminum Shelf-Trac welded to the walls of the side upper body compartments for vertical partition installation and adjustability.

## **ROOF COMPARTMENT - VERTICAL PARTITION**

# SVI Trucks

There shall be four (4) vertical partition(s) provided in the roof compartment(s). The partition(s) shall be used to retain or hold equipment in place during travel. Each partition shall be fabricated from 3/16" smooth aluminum and bolted to specified Shelf-Trac for ease of adjustment.

## **UPPER BODY WALKWAY**

A 34" wide, upper body walkway shall be provided at the center of body and recessed into the roof structure. The walkway shall be fabricated from NFPA compliant 3/16" aluminum tread plate with continuously welded cross seams to prevent moisture penetration into apparatus body, No Exceptions. The walkway shall be supported with 2" x 2" tubing on 14" - 22" centers.

13/16" drains shall be installed at front of walkway connected to 1" flexible drain tubes that will terminate below the body.

## **WALKWAY/STEP LIGHTS**

There shall be three (3) OnScene Solutions Rough-Service 9" [Access Series](#) LED lights provided to illuminate the walkway or step area. The lights shall be activated when the parking brake is set.

Each light shall be mounted in an extruded aluminum housing to protect against damage from personnel or equipment.

Lighting shall provide illumination at a minimum level of 2 fc (20 lx) on all work surfaces, steps, and walkways. Lighting shall be switchable but activated automatically when the vehicle park brake is set.

### **SHOP NOTES**

Use Access series lights

## **ROOF ACCESS STAIRWAY**

The rear of the body shall be provided with a minimum 34" wide roof access stairway recessed into the side rear compartments. Stairs treads shall be 9 1/2" minimum depth and formed from 3/16" NFPA compliant aluminum tread plate with uniformed riser height design. Stair treads will be continuously welded into side walls. Bolt-in tread design will not be acceptable.

Roll-out ladder design requiring set-up time and 8 plus feet behind apparatus or vertical ladders that do not allow firefighter to safely ascend or descend with equipment will not be acceptable.

## **STAIRWAY HANDRAILS**

There shall be two (2) handrails provided, one (1) on each side wall of recessed center stairway providing three-points of contact at all times for safer access to roof compartments. The handrails shall be angled for optimum use during ingress or egress of the upper walkway area.

Handrails shall be NFPA compliant 1-1/4" knurled 304 stainless steel with welded end stanchions.

## **WALKWAY/STEP LIGHTS**

There shall be two (2) OnScene Solutions Rough-Service 9" [Access Series](#) LED lights provided to illuminate the walkway or step area. The lights shall be activated when the parking brake is set.

# SVI Trucks

Each light shall be mounted in an extruded aluminum housing to protect against damage from personnel or equipment.

Lighting shall provide illumination at a minimum level of 2 fc (20 lx) on all work surfaces, steps, and walkways. Lighting shall be switchable but activated automatically when the vehicle park brake is set.

## SHOP NOTES

Use Access series

### **STEP COMPARTMENT - UPPER**

There shall be one (1) upper compartment located directly below walkway area. The compartment shall have a horizontally hinged brushed stainless steel door with a D-ring handle. The compartment shall be manufactured to prevent road debris, dirt and moisture from entering the enclosure. The compartment shall be approximately 26" wide x 8" high x maximum depth available

Each Compartment shall have an OnScene LED light that shall be automatically activated when the door is opened and wired to the NFPA required hazard warning light provided in the cab.

Devices to secure equipment, compartment dividers, or UHMW plastic angles, or sheeting will be used for storage of specified equipment as required to prevent damage to equipment.

- The hinged door(s) shall have a stainless steel 6" offset bent D-ring locking handle. A gasket shall be placed between handle and door. Door latch shall be a single point latch flush mounted to exterior door panel.

### **FOLD-DOWN STEP**

There shall be one (1) fold-down step located at the bottom of the roof access stairway mounted on top of bumper to reduce the distance from the ground to the first step. The step surface shall be NFPA compliant aluminum treadplate and shall manually fold up into the stairway with an over-center gas shock to hold step in position during travel. The step shall activate the "Hazard Warning Light" in the cab when not in the stowed position.

### **REAR BODY HANDRAILS**

There shall be two (2) 24" vertical handrails on the rear of the body. Handrails shall be NFPA compliant 1-1/4" knurled 304 stainless steel with welded end stanchions.

### **BODY WIDTH DIMENSIONS**

The body shall be 100.0" wide, not including drip rail or non-permanent fixtures. Interior compartment depth dimensions shall be approximately:

<u>Area Description</u>	<u>Dimension</u>
Transverse Area above Subframe	95.0"
Compartment Depth below Subframe	24.5"

### **STREETSIDE COMPARTMENT - FRONT (S1)**

The interior useable compartment width shall be approximately 56.0" wide.

# SVI Trucks

The compartment door opening shall be approximately 49.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

## **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) 1,000 lbs. slide-out tray(s) with a SlideMaster painted structural steel base approximately 70" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Each slide base shall have the HSL spring latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".

## SHOP NOTES

With HSL latch

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- Two (2) OnScene 64" Access LED compartment lights, vertically mounted.
- The 12 volt electrical distribution panel shall be located in the front lower compartment.

## **STREETSIDE COMPARTMENT - AHEAD OF REAR WHEELS (S2)**

The interior useable compartment width shall be approximately 56.0" wide.

The compartment door opening shall be approximately 49.0" wide.

This compartment shall have a ROM roll-up door.

# SVI Trucks

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

## **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) 400 lbs. slide-out tray(s) approximately 24" deep and as wide as the compartment layout or door opening permits. The tray top shall be fabricated from 3/16" 3003 aluminum sheet with a 3" vertical lip and welded corners to form a box type tray surface. The sliding tracks shall extend 100% of the slide length. The tray assembly shall utilize a pneumatic cylinder mounted on underside to hold the tray in both the extended and closed positions.
- There shall be one (1) 1,000 lbs. slide-out tray(s) with a SlideMaster painted structural steel base approximately 94" deep and as wide as the compartment layout or door opening permits, capable of extending out either side of the body located above the level of the chassis frame rails. Each slide base shall have the [HSL spring latch](#) which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".

## SHOP NOTES

### HSL latch

- There shall be one (1) 250 lbs. slide-out and tilt down tray(s) with a SlideMaster painted structural steel base approximately 46" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and will be vertically adjustable in height. Each slide base shall have a gravity latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".
- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- Two (2) OnScene 64" Access LED compartment lights, vertically mounted.

# SVI Trucks

- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

## **STREETSIDE COMPARTMENT - ABOVE REAR WHEELS (S3)**

The interior useable compartment width shall be approximately 59.0" wide.

The compartment door opening shall be approximately 52.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

## **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) 1,000 lbs. slide-out tray(s) with a SlideMaster painted structural steel base approximately 94" deep and as wide as the compartment layout or door opening permits, capable of extending out either side of the body located above the level of the chassis frame rails. Each slide base shall have the [HSL spring latch](#) which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 1/2".

### SHOP NOTES

HSL latch

- There shall be one (1) 250 lbs. slide-out and tilt down tray(s) with a SlideMaster painted structural steel base approximately 46" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and will be vertically adjustable in height. Each slide base shall have a gravity latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 1/2".

# SVI Trucks

- Two (2) OnScene 36" Access LED compartment lights, vertically mounted.

## **STREETSIDE COMPARTMENT - REAR (S4)**

The interior useable compartment width shall be approximately 64.0" wide.

The compartment door opening shall be approximately 57.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

## **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) 600 lbs. slide-out tray(s) with a SlideMaster painted structural steel base approximately 30" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Each slide base shall have the [HSL spring latch](#) which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".

## SHOP NOTES

HSL latch

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- One (1) Hannay ECR1618-17-18 electric cable reel(s) capable of storing 200' of 10/3 electric cable. Reel(s) shall be designed to hold 110% of the capacity of cord length, with fully enclosed 45 amp, three (3) conductor collector rings. Reel(s) shall be mounted to channel structure that allows for side-to-side adjustment of reel position.

# SVI Trucks

- Power rewind control(s) shall be in a position where the operator can observe the rewinding operation and not be more than 72 in. (1830 mm) above the operator's standing position, and shall be marked with a label indicating its function.
- A label shall be provided in a visible location adjacent to reel with following information: Current rating, Current type, Phase, Voltage, and Total cord length.
- The cable reel shall be equipped with 200' of 10/3 SEOW yellow cable, a molded plastic ball clamp, and a single heavy duty L5-30 twist-lock female plug at the end.
- The fairlead roller shall be mounted directly to the reel.
- Two (2) OnScene 64" Access LED compartment lights, vertically mounted.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

## **CURBSIDE COMPARTMENT - FRONT (C1)**

The interior useable compartment width shall be approximately 56.0" wide.

The compartment door opening shall be approximately 49.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- A keyed cylinder lock shall be provided in the bottom portion of the roll-up door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

## **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be two (2) adjustable shelf/shelves approximately 30" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges.

# SVI Trucks

- There shall be one (1) 250 lbs. slide-out and tilt down tray(s) with a SlideMaster painted structural steel base approximately 30" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and will be vertically adjustable in height. Each slide base shall have a gravity latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".
- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- Two (2) OnScene 64" Access LED compartment lights, vertically mounted.
- There shall be one (1) 100 amp Blue Sea Systems ST Series blade type fuse block with screw type terminals for both positive and negative buss with cover provided for distribution of up to six (6) 30 amp, 12 VDC circuits. Fuse block shall be located per required circuits and be protected from damage.
- One (1) 120/240 VAC load center.
- The generator gauge panel.
- There shall be one (1) 120 VAC outlet(s) located in compartment on the forward wall.
  - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
- There shall be one (1) approximate 4' long 120 VAC outlet strip(s) with straight blade household type outlets provided.
  - Outlet(s) shall be powered through the on-board generator system.

## **CURBSIDE COMPARTMENT - AHEAD OF REAR WHEEL (C2)**

The interior useable compartment width shall be approximately 56.0" wide.

The compartment door opening shall be approximately 49.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- A keyed cylinder lock shall be provided in the bottom portion of the roll-up door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.

# SVI Trucks

- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

## **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) 400 lbs. slide-out tray(s) approximately 16" deep and as wide as the compartment layout or door opening permits. The tray top shall be fabricated from 3/16" 3003 aluminum sheet with a 3" vertical lip and welded corners to form a box type tray surface. The sliding tracks shall extend 100% of the slide length. The tray assembly shall utilize a pneumatic cylinder mounted on underside to hold the tray in both the extended and closed positions. This will hold the three (3) batteries used for the inverter system.

### SHOP NOTES

To hold three (3) inverter batteries

- There shall be one (1) 1,000 lbs. slide-out tray(s) with a SlideMaster painted structural steel base approximately 94" deep, capable of extending out either side of the body located above the level of the chassis frame rails. Each slide base shall have the [HSL spring latch](#) which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".

### SHOP NOTES

HSL latch

- There shall be one (1) 250 lbs. slide-out and tilt down tray(s) with a SlideMaster painted structural steel base approximately 46" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and will be vertically adjustable in height. Each slide base shall have a gravity latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".
- There shall be one (1) video display module fabricated from 3/16" (.188) 3003H-14 aluminum alloy smooth sheet and painted to match the compartment interior. The module will be designed to hold one (1) FD supplied 55" flat screen multifunction display. The display will be on a slide track to allow for it to be deployed from the module and rotate left to face the curbside area.
- Padded cushions will be installed within the module to secure the monitor in place when in the stowed position.

### SHOP NOTES

Module to hold 55" video display. Display mounted to a slide out track and is adjustable.

- The above module will have a solid aluminum door with a double return brake at the top for strength. The door shall have stainless steel plates with round stainless dowels welded onto them to create the latches and hinges for the door.
- The inside of the door will have a pad to assist in securing the monitor in place when stowed and prevent damage to the display.

### SHOP NOTES

# SVI Trucks

Add pad to inside of door

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- One (1) Norcold 1.7 cu.ft. model DE-0740 refrigerator/freezer shall be provided and installed. The unit shall be a flush mount style with a custom enclosure. The refrigerator shall operate from both 12 VDC and 120 VAC power. The built-in dimensions are 20-1/2" high x 15-1/4" wide x 17-3/4" deep.
- Two (2) OnScene 64" Access LED compartment lights, vertically mounted.
- There shall be one (1) 100 amp Blue Sea Systems ST Series blade type fuse block with screw type terminals for both positive and negative buss with cover provided for distribution of up to six (6) 30 amp, 12 VDC circuits. Fuse block shall be located per required circuits and be protected from damage.
- There shall be one (1) 120 VAC outlet(s) located in compartment on the forward wall.
  - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
  - Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.

Inverter Batteries (3) (Location only)

SHOP NOTES

Located in the 400# tray

- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

## **CURBSIDE COMPARTMENT - ABOVE REAR WHEEL (C3)**

The interior useable compartment width shall be approximately 59.0" wide.

The compartment door opening shall be approximately 52.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- A keyed cylinder lock shall be provided in the bottom portion of the roll-up door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.

# SVI Trucks

- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

## **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) 1,000 lbs. slide-out tray(s) with a SlideMaster painted structural steel base approximately 94" deep, capable of extending out either side of the body located above the level of the chassis frame rails. Each slide base shall have the HSL spring latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".

## SHOP NOTES

### HSL latch

- There shall be one (1) 250 lbs. slide-out and tilt down tray(s) with a SlideMaster painted structural steel base approximately 46" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and will be vertically adjustable in height. Each slide base shall have a gravity latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".
- Two (2) OnScene 36" Access LED compartment lights, vertically mounted.

## **CURBSIDE COMPARTMENT - REAR (C4)**

The interior useable compartment width shall be approximately 64.0" wide.

The compartment door opening shall be approximately 57.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- A keyed cylinder lock shall be provided in the bottom portion of the roll-up door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.

# SVI Trucks

- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

## **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) adjustable shelf/shelves approximately 24" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edge.
- There shall be one (1) 1,000 lbs. slide-out tray(s) with a SlideMaster painted structural steel base approximately 70" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Each slide base shall have the HSL spring latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 1/2".

### SHOP NOTES

HSL latch

- Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
- There shall be one (1) bolt-in vertical compartment partition(s) provided dividing the compartment into left and right sides. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.

### SHOP NOTES

Located adjacent to Lista Cabinet from lower floor to ceiling

- There shall be one (1) SCBA cylinder storage module for 8" OD (maximum) SCBA bottles. The maximum length of the SCBA cylinder shall be 24.75". The module shall have an exterior shell fabricated from 1/8" (.125) 3003H-14 aluminum alloy sheet. The module shall have a 2" slope, front to back to prevent cylinders from sliding out. The SCBA cylinder storage tubing shall be fabricated from PVC pipe to prevent damage or abrasion to cylinders. In addition there shall be rubber matting provided in the base of each storage tube for bottle protection and to prevent slipping.

### SHOP NOTES

Brand: \_\_\_\_\_

Diameter: \_\_\_\_\_" (Must be less than 7.625")

Length: \_\_\_\_\_" (with valve)

- The SCBA cylinder module shall be capable of storing two (2) SCBA cylinders up to 7.5" diameter.

### SHOP NOTES

CHANGE QTY TO TWO (2)

# SVI Trucks

- There shall be six (6) Zico 1000 series KD-UH walkaway type SCBA air pack bracket(s) with high cycle coated spring clips and angled foot plate with CRS straps. The brackets will be mounted to the above slide out tray vertical partition, three (3) each side. They will be designed and mounted to hold FD supplied SCBA's with one-hour bottles.

## SHOP NOTES

Need to have straps. Mounted to the slide-out tray vertical partition, three each side. Will hold FD supplied SCBA's with one-hour bottles.

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.

## SHOP NOTES

Extended from C3 wall to Lista cabinet

- Two (2) OnScene 64" Access LED compartment lights, vertically mounted.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

## **ROOF ACCESS STAIRWAY**

The rear of the body shall be provided with a recessed center stairway with minimum 34" width. Stairs treads shall be 9.5" minimum depth and formed from 3/16" NFPA compliant aluminum tread plate with uniformed maximum riser height of 12". Roll-out ladder design requiring set-up time and 8 plus feet behind apparatus or vertical ladders that do not allow firefighter to safely ascend or descend with equipment will not be acceptable.

## **STAIRWAY HANDRAILS**

There shall be two (2) handrails provided, one (1) on each side wall of recessed center stairway providing three-points of contact at all times for safer access to roof compartments. The handrails shall be angled for optimum use during ingress or egress of the upper walkway area.

Handrails shall be NFPA compliant 1-1/4" knurled 304 stainless tubing with welded end stanchions.

## **SIDE BODY PROTECTION - RUB RAIL**

OnScene Solutions rub rails shall be provided below the compartment door openings on both the streetside and curbside.

The rub rail shall be fabricated from 6063 extruded aluminum, measuring approximately 2-3/4" high x 1-3/8" thick with tapered aluminum end caps. The rub rail shall be bolted to the body using stainless steel bolts and 1-1/2" diameter x 5/8" thick rubber mount isolators to prevent damage to the body.

The rails shall incorporate LED clearance marker lighting recessed into the rail fascia to avoid damage to the light in case of impact. The rub rail shall have an accessory mounting track integrated into the backside of the rail to allow mounting of accessories such as ground lighting.

3M™ Diamond Grade™ Conspicuity striping shall be provided in the rub rail. The striping shall be red in color.

# SVI Trucks

## **FRONT GRAVEL GUARDS**

Gravel guards shall be provided on front lower body corners. Guards shall be 12" high, extend from behind cab or step and wrap around to the front compartment door opening fabricated from 20 gauge brushed stainless steel.

## **ROLL-OUT AWNING CURBSIDE**

A Carefree Mirage, 110 Volt AC powered, Lateral Arm Acrylic Patio Awning with Direct Response Electronics shall be installed on the apparatus body. The Direct Response Electronics includes easy-to-use controls and a Motion Detection System. The awning shall have a system to detect canopy motion, the most important element to prevent wind/weather damage. The awning shall automatically retract when the canopy reaches a certain level of movement - you determine the movement level on the control panel.

The awning shall activate the door ajar warning system in the cab when not in the stowed position.

The 110V motor shall be completely sealed and UL approved. The awning pitch shall be adjusted to up to 30"

The awning shall be 18' wide with a 10' projection. (Size refers to box length; actual fabric length will be 8" shorter.)

The Mirage shall be covered by a "Two and Four" Limited Warranty - Two years 100% parts, labor, & freight on canopy, four years 100% parts, labor, and freight on motor, electronics, roller & hardware. Warranty covers manufacturer's defects only. Wind and rain damage are not covered.

- The awning fabric color shall be ivory.

The specified awning above shall be surface mounted to upper body side. The awning shall add approximately 5.75" to body width.

## **AWNING HOUSING COLOR**

The awnings standard Polar White vinyl housing color shall be re-painted to match upper body color.

## **LOW VOLTAGE ELECTRICAL SYSTEM- 12 VDC**

### General

Any low voltage electrical systems or warning devices installed on the fire apparatus shall be appropriate for the mounting location and intended electrical load.

Where wire passes through sheet metal, grommets shall be used to protect wire and wire looms. Electrical connections shall be with double crimp water-tight heat shrink connectors.

All 12 VDC wiring running from front to back of vehicle body shall be run in full length electrical wiring raceway down each side of body.

### Wiring

All electrical circuit feeder wiring supplied and installed by the fire apparatus manufacturer shall meet the requirements of NFPA Chapter 13.

# SVI Trucks

The circuit feeder wire shall be stranded copper or copper alloy conductors of a gauge rated to carry 125% of the maximum current for which the circuit is protected. Voltage drops in all wiring from the power source to the using device shall not exceed 10%. The use of star washers for circuit ground connections shall not be permitted.

All circuits shall otherwise be wired in conformance with SAE J1292, *Automobile, Truck, Truck-Tractor, Trailer, and Motor Coach Wiring*.

## Wiring and Wire Harness Construction

All insulated wire and cable shall conform to SAE J1127, *Low Voltage Battery Cable*, or SAE J1128, *Low Voltage Primary Cable*, type SXL, GXL, or TXL.

All conductors shall be constructed in accordance with SAE J1127 or SAE J1128, except where good engineering practice dictates special strand construction. Conductor materials and stranding, other than copper, shall be permitted if all applicable requirements for physical, electrical, and environmental conditions are met as dictated by the end application. Physical and dimensional values of conductor insulation shall be in conformance with the requirements of SAE J1127 or SAE J1128, except where good engineering practice dictates special conductor insulation. The overall covering of conductors shall be moisture-resistant loom or braid that has a minimum continuous rating of 194°F (90°C) except where good engineering practice dictates special consideration for loom installations exposed to higher temperatures. The overall covering of jacketed cables shall be moisture resistant and have a minimum continuous temperature rating of 194°F (90°C), except where good engineering practice dictates special consideration for cable installations exposed to higher temperatures.

All wiring connections and terminations shall use a method that provides a positive mechanical and electrical connection. The wiring connections and terminations shall be installed in accordance with the device manufacturer's instructions. All ungrounded electrical terminals shall have protective covers or be in enclosures. Wire nut, insulation displacement, and insulation piercing connections shall not be used.

Wiring shall be restrained to prevent damage caused by chafing or ice buildup and protected against heat, liquid contaminants, or other environmental factors.

Wiring shall be uniquely identified at least every 2 ft (0.6 m) by color coding or permanent marking with a circuit function code. The identification shall reference a wiring diagram.

Circuits shall be provided with properly rated low voltage overcurrent protective devices. Such devices shall be readily accessible and protected against heat in excess of the overcurrent device's design range, mechanical damage, and water spray. Circuit protection shall be accomplished by utilizing fuses, circuit breakers, fusible links, or solid state equivalent devices.

If a mechanical-type device is used, it shall conform to one of the following SAE standards:

- 1) SAE J156, *Fusible Links*
- 2) SAE J553, *Circuit Breakers*
- 3) SAE J554, *Electric Fuses (Cartridge Type)*
- 4) SAE J1888, *High Current Time Lag Electric Fuses*
- 5) SAE J2077, *Miniature Blade Type Electrical Fuses*

Switches, relays, terminals, and connectors shall have a direct current (dc) rating of 125% of maximum current for which the circuit is protected.

## Power Supply

# SVI Trucks

A 12 V or greater electrical alternator shall be provided. The alternator shall have a minimum output at idle to meet the minimum continuous electrical load of the vehicle, at 200°F (93°C) ambient temperature within the engine compartment, and shall be provided with full automatic regulation.

## Minimum Continuous Electrical Load

The minimum continuous electrical load shall consist of the total amperage required to simultaneously operate the following in a stationary mode during emergency operations:

- 1) The propulsion engine and transmission
- 2) All legally required clearance and marker lights, headlights, and other electrical devices except windshield wipers and four-way hazard flashers
- 3) The radio(s) at a duty cycle of 10 percent transmit and 90 % receive (for calculation and testing purposes, a default value of 5 A continuous)
- 4) The lighting necessary to produce 2 fc (20 lx) of illumination on all walking surfaces on the apparatus and on the ground at all egress points onto and off the apparatus, 5 fc (50 lx) of illumination on all control and instrument panels, and 50 percent of the total compartment lighting loads
- 5) The minimum optical warning system, where the apparatus is blocking the right-of way
- 6) The continuous electrical current required to simultaneously operate any fire pumps, aerial devices, and hydraulic pumps
- 7) Other warning devices and electrical loads defined by the purchaser as critical to the mission of the apparatus

If the apparatus is equipped to tow a trailer, an additional 45 A shall be added to the minimum continuous electrical load to provide electrical power for the federally required clearance and marker lighting and the optical warning devices mounted on the trailer.

The condition of the low voltage electrical system shall be monitored by a warning system that provides both an audible and a visual signal to persons on, in, or near the apparatus of an impending electrical system failure caused by the excessive discharge of the battery set.

The charge status of the battery shall be determined either by direct measurement of the battery charge or indirectly by monitoring the electrical system voltage.

If electrical system voltage is monitored, the alarm shall sound if the system voltage at the battery or at the master load disconnect switch drops below 11.8 V for 12 V nominal systems, 23.6 V for 24 V nominal systems, or 35.4 V for 42 V nominal systems for more than 120 seconds.

A voltmeter shall be mounted on the driver's instrument panel to allow direct observation of the system voltage.

## Electromagnetic Interference

Electromagnetic interference suppression shall be provided, as required, to satisfy the radiation limits specified in SAE J551/1, *Performance Levels and Methods of Measurement of Electromagnetic Compatibility of Vehicles, Boats (up to 15 m), and Machines (16.6 Hz to 18 GHz)*.

## Wiring Diagram

A complete electrical wiring schematic of actual system shall be provided with finished apparatus. Similar or generic type electrical schematics shall NOT BE ACCEPTABLE.

## Low Voltage Electrical System Performance Test

# SVI Trucks

A low voltage electrical system test certification shall be provided with delivered apparatus.

## **12 VOLT MULTIPLEX CONTROL CENTER**

The apparatus shall be equipped with a Weldon V-MUX multiplexed 12 volt electrical system that will provide complete diagnostic capability, No Exception. The system shall have the capability of delivering multiple signals via a CAN bus, utilizing specifications set forth by SAE J1939. The system shall be node based to maximize stability so that failure of one node does not affect the operation of the other nodes. The system shall use shielded twisted-pair wire for transmission of system function signals. The shielded wire shall provide protection against EMI and RFI noise interruptions.

The multiplex system shall be responsible for providing power management functions as well as load shedding. The warning light system shall be controlled by the multiplex system. The system shall be capable of displaying text and/or graphic messages on a display module. The system shall be based on solid-state technology and shall include self-contained diagnostic indicators.

## **WELDON CERTIFICATION**

A letter shall be provided with bid submittal that the Contractor has successfully completed the Weldon training requirements for Level 1 of the V-MUX Certified Supplier Program and is authorized to design, build, and service V-MUX electrical systems.

The apparatus shall be equipped with a Weldon V-MUX multiplexed 12 volt electrical system that will provide complete diagnostic capability, No Exception. The system shall have the capability of delivering multiple signals via a CAN bus, utilizing specifications set forth by SAE J1939. The system shall be node based to maximize stability so that failure of one node does not affect the operation of the other nodes. The system shall use shielded twisted-pair wire for transmission of system function signals. The shielded wire shall provide protection against EMI and RFI noise interruptions.

The multiplex system shall be responsible for providing power management functions as well as load shedding. The warning light system shall be controlled by the multiplex system. The system shall be capable of displaying text and/or graphic messages on a display module. The system shall be based on solid-state technology and shall include self-contained diagnostic indicators.

## **MULTIPLEX SYSTEM INTERFACE DISPLAY**

The Weldon V-MUX Vista IV multiplex system interface display(s) shall be provided by the cab/chassis manufacturer. The full-color Vista interface display allows the user to control warning and scene lighting, HVAC controls (when specified), and view on-board diagnostics including service information. This display has a wide operating temperature range, automatic screen switching in response to current conditions, and a sleep mode option to eliminate night glare. The following features shall be included;

- 800 x 480 resolution
- Four video ports
- Flash updates with USB memory stick
- Display inside and outside temperature (when specified)
- Automatic climate control (when specified)
- 100% Configurable (OEM Level)
- Field re-programmable
- Peer to peer network
- On-board diagnostics / service information

# SVI Trucks

- Colors change to indicate button status
- Video Ready for: Backup camera, Thermal camera, DVD, GPS...

## **BATTERY SYSTEM**

The battery connectors shall be heavy duty type with cables terminating in heat shrink loom. Heavy duty battery cables shall provide maximum power to the electrical system. Where required, the cables shall be shielded from exhaust tubing and the muffler. Large rubber grommets shall be provided where cables enter the battery compartment.

Batteries shall be of the high-cycle type. With the engine off, the battery system shall be able to provide the minimum continuous electrical load for 10 minutes without discharging more than 50 percent of the reserve capacity and then to restart the engine. The battery system cold cranking amps (CCA) rating shall meet or exceed the minimum CCA recommendations of the engine manufacturer. The batteries shall be mounted to prevent movement during fire apparatus operation and shall be protected against accumulations of road spray, snow, and road debris. The batteries shall be readily accessible for examination, testing, and maintenance.

A means shall be provided for jump-starting the engine if the batteries are not accessible without lifting the cab of a tilt-cab apparatus.

Where an enclosed battery compartment is provided, it shall be ventilated to the exterior to prevent the buildup of heat and explosive fumes. The batteries shall be protected against vibration and temperatures that exceed the battery manufacturer's recommendation.

An onboard battery conditioner or charger or a polarized inlet shall be provided for charging all batteries. Where an onboard conditioner or charger is supplied, the associated line voltage electrical power system shall be installed in accordance with Chapter 22.

One of the following master disconnect switches shall be provided:

- 1) A master body disconnect switch that disconnects all electrical loads not provided by the chassis manufacturer
- 2) A master load disconnect switch that disconnects all electrical loads on the apparatus except the starter

Electronic control systems and similar devices shall be permitted to be otherwise connected if so specified by their manufacturer.

The alternator shall be wired directly to the batteries through the ammeter shunt(s), if one is provided, and not through the master load disconnect switch.

A green "battery disconnect on" indicator light that is visible from the driver's position shall be provided.

Rechargeable hand lights, radios, and other similar devices shall be permitted to be connected to the electrical system ahead of the master disconnect switch.

A sequential switching device shall be permitted to energize the optical warning devices and other high current devices required in minimum continuous electrical load, provided the switching device shall first energize the electrical devices required in minimum continuous electrical load within 5 seconds.

## **BATTERY SWITCH**

# SVI Trucks

One (1) "battery disconnect on" switch in cab located within easy reach of Driver with indicator light that is visible from the driver's position shall be provided. The switch and indicator light shall be supplied and installed by the cab/chassis manufacturer.

## **BATTERY SOLENOID**

Battery switch shall consist of a minimum 200 ampere, constant duty solenoid to feed from positive side of battery.

## **BATTERY CHARGER**

One (1) Newmar model PT-80 battery charger shall be provided ideal for charging multiple battery bank systems. The Newmar Phase Three "Smart" battery charging technology provides significant benefits over traditional float chargers whose output voltage droops under heavy loads, and fails to attain proper voltage levels recommended by battery manufactures as part of a proper charge cycle. These issues are particular significant in Emergency Vehicle applications where rapid recharge is required while powering DC loads, and reliable service life of batteries is critical. PT Series chargers feature multiple isolated outputs to charge independent battery banks.

Features;

- "Smart" circuitry provides three stage charging—bulk, absorption, float
- Gel-Cell/Flooded Lead-acid/AGM battery type switch selects optimum charge/float voltages
- Multiple isolated outputs - charge independent battery banks\*
- Optional sensor adjusts output voltage based on battery temperature\*
- Current limiting - charges dead batteries without overload
- Use as a power supply; can power Radios/MDT's without a battery in line
- Built to last—rugged stainless steel case with circuitry hardened for hostile environments
- Remote meter included

## **SHORE POWER INLET**

One (1) Kussmaul 120 VAC, 30 amp Super Auto-Eject shore power inlet(s) shall be provided. The shore power connection shall automatically disengage from vehicle when chassis ignition is engaged.

The protective ground from the shoreline inlet shall be bonded to the vehicle frame.

- The outlet cover shall be red.
- The shore power plug shall be located near the Driver door area.

## **ENGINE COMPARTMENT LIGHT**

Engine compartment light(s) shall be supplied and installed by the cab chassis manufacturer.

## **CAB HAZARD WARNING LIGHT**

A red flashing or rotating light, located in the driving compartment. The light shall be furnished by the cab/chassis manufacturer. The light shall be illuminated automatically whenever the vehicles parking brake is not fully engaged and any of the following conditions exist:

- Any passenger or equipment compartment door is not closed.

# SVI Trucks

- Any ladder or equipment rack is not in the stowed position.
- Stabilizer system is not in its stowed position.
- Powered light tower is not stowed.
- Any other device permanently attached to the apparatus is open, extended, or deployed in a manner that is likely to cause damage to the apparatus if the apparatus is moved.

Compartments and equipment meeting all of the following conditions shall be permitted to be exempt from being wired to the hazard light:

- The volume is less than or equal to 4 ft<sup>3</sup> (0.1 m<sup>3</sup>).
- The compartment has an opening less than or equal to 144 in.<sup>2</sup> (92,900 mm<sup>2</sup>).
- The open door does not extend sideways beyond the mirrors or up above the top of the fire apparatus.
- All equipment in the compartment is restrained so that nothing can fall out if the door is open while the apparatus is moving.
- Manually raised pole lights with an extension of less than 5 ft (1.5 m).

The hazard light shall be labeled "DO NOT MOVE APPARATUS WHEN LIGHT IS ON".

## **BACK-UP ALARM**

An electronic back-up alarm shall be supplied and installed by the cab/chassis manufacturer. The back-up alarm shall actuate automatically when the transmission gear selector is placed in reverse.

## **REAR VIEW CAMERA**

The cab chassis provided rear view camera shall be installed on the rear of the body.

## **INTERIOR LED LIGHTS**

Two (2) OnScene Solution model #70156, 10" x 10" x 7/8", 10-30 VDC, surface mount dual red and white LED light(s) with clear lens shall be provided throughout the vehicle. Each light shall be individually switched with a high/low intensity setting switchable at the entry door(s). In addition light(s) will be capable of a five (5) second delay after switching off.

## **TAIL LIGHTS**

Rear body tail lights shall be vertically mounted and located per Federal Motor Vehicle Safety Standards, FMVSS and Canadian Motor Vehicle Safety Standards CMVSS. The following lights shall be furnished;

- Two (2) Whelen red LED 900 Series 90BTT00T stop/tail lights
- Two (2) Whelen amber LED 900 Series 90A00TAR turn arrow
- Two (2) Whelen LED 700 Series 70C00WCR maximum intensity back-up lights with clear lens

Each of the lights above shall be mounted in a EFLANGE, chrome finish bezel.

### SHOP NOTES

Match Henderson Air Light

Top to bottom

900 Red brake/tail light

900 Amber turn

700 Back up

700 Warning

# SVI Trucks

## **MIDSHIP MARKER/TURN SIGNAL**

Two (2) Whelen model T0A00MAR 2" round amber LED midship body clearance marker/turn signal lights shall be provided and installed, one (1) light on each side of the body, in forward wheel well of rear axle. Midship marker/turn lights shall be wired to the headlight circuit of the chassis.

## **MARKER LIGHTS**

The body shall be equipped with all necessary clearance lights and reflectors in accordance with Federal Motor Vehicle Safety Standards (FMVSS) and Canadian Motor Vehicle Safety Standards (CMVSS) regulations. All body clearance lights shall be Truck-Lite Model 18 LED to reduce the need for maintenance and lower the amp draw. Clearance lights shall be wired to the headlight circuit of the chassis.

## **CAB STEP LIGHTS / GROUND LIGHTS**

The step lights and/or ground lights shall be supplied and installed by the cab/chassis manufacturer. Light(s) shall be capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting designed to provide illumination on areas under the driver and crew riding area exits shall be switchable but activated automatically when the exit doors are opened.

## **LICENSE PLATE MOUNTING BRACKET**

There shall be one (1) Cast Products aluminum license plate mounting with chrome shielded license plate light mounted on the rear of the body.

## **ELECTRONIC SIREN**

The siren control head shall be supplied and installed by the cab/chassis manufacturer. Siren power shall be wired through the master warning light switch.

## **SIREN SPEAKER**

The siren speaker(s) shall be supplied and installed by the cab/chassis manufacturer.

## **SIDE SCENE LIGHTS**

There shall be four (4) Whelen Super LED 900 series (9" x 7") recess mounted scene lights (9SC0ENZR) provided on the upper body. Light quantity shall be divided equally per side. Each light will have twenty-four LED diodes that draw a total of 4.0 amps, with 3,000 lumens. The light shall be an 8-32 degree gradient lens and chrome flange.

Two (2) switches shall be provided, one (1) for the streetside scene lights, and one (1) for the curbside scene lights.

The lights shall be switched at the Vista display in the cab.

# SVI Trucks

## **REAR SCENE LIGHTS**

Two (2) Whelen Super LED 900 series (9" x 7") recess mounted scene lights (9SC0ENZR) shall be provided on the upper rear body to light the work area immediately behind the vehicle. Each light will have twenty-four LED diodes that draw a total of 4.0 amps, with 3000 Lumens. The light shall be an 8-32 degree gradient lens and chrome flange.

The above scene lights shall light to a level of at least 3 fc (30 lx), measured at 25 equally spaced points on a 2.5 ft (750 mm) grid with in a 10 ft x 10 ft (3 m x 3m) square to the rear of vehicle.

The lights shall be switched at the Vista display in the cab.

The rear scene lights shall also be activated when the apparatus is in reverse.

## **DAVID CLARK INTERCOM SYSTEM**

The following four (4) position David Clark intercom system shall be provided and installed to improve the safety of firefighters and rescue professionals through enhanced communication and hearing protection. System shall have the following major components as minimum;

3800 Series Master Station

Driver PTT Module

Officer PTT Module

Two (2) Intercom Only Modules

Four (4) H3442 Headsets

One (1) Radio Interface Module to connect to FD supplied radio. Model TBD.

SHOP NOTES

Four position driver & officer PTT, two (2) rear intercom. 3800 series

## **INTERCOM SYSTEM INSTALLATION**

The above listed intercom system shall be installed in the cab locations as follows;

### **Front of Cab**

- Driver's – Mounted above the right shoulder position on ceiling.
- Officer's – Mounted above the left shoulder position on ceiling.

### **Rear Crew Area**

- Module mounted on "L" shape desk best location for each seat

SHOP NOTES

Rear jacks located on desk

## **WARNING LIGHT PACKAGE**

Each apparatus shall have a system of optical warning devices that meets or exceeds the requirements of this section.

# SVI Trucks

The optical warning system shall consist of an upper and a lower warning level. The requirements for each level shall be met by the warning devices in that particular level without consideration of the warning devices in the other level.

For the purposes of defining and measuring the required optical performance, the upper and lower warning levels shall be divided into four (4) warning zones. The four zones shall be determined by lines drawn through the geometric center of the apparatus at 45 degrees to a line drawn lengthwise through the geometric center of the apparatus. The four (4) zones shall be designated A, B, C, and D in a clockwise direction, with zone A to the front of the apparatus.

Each optical warning device shall be installed on the apparatus and connected to the apparatus's electrical system in accordance with the requirements of this standard and the requirements of the manufacturer of the device.

A master optical warning system switch that energizes all the optical warning devices shall be provided.

The optical warning system on the fire apparatus shall be capable of two (2) separate signaling modes during emergency operations. One (1) mode shall signal to drivers and pedestrians that the apparatus is responding to an emergency and is calling for the right-of-way. One (1) mode shall signal that the apparatus is stopped and is blocking the right-of-way. The use of some or all of the same warning lights shall be permitted for both modes provided the other requirements of this chapter are met.

A switching system shall be provided that senses the position of the parking brake or the park position of an automatic transmission. When the master optical warning system switch is closed and the parking brake is released or the automatic transmission is not in park, the warning devices signaling the call for the right-of-way shall be energized. When the master optical warning system switch is closed and the parking brake is on or the automatic transmission is in park, the warning devices signaling the blockage of the right-of-way shall be energized. The system shall be permitted to have a method of modifying the two (2) signaling modes.

The optical warning devices shall be constructed or arranged so as to avoid the projection of light, either directly or through mirrors, into any driving or crew compartment(s). The front optical warning devices shall be placed so as to maintain the maximum possible separation from the headlights.

Steadily burning, non flashing optical sources shall be permitted to be used.

## **UPPER LEVEL OPTICAL WARNING DEVICES**

The upper-level optical warning devices shall be mounted as high and as close to the corner points of the apparatus as is practical to define the clearance lines of the apparatus. The upper-level optical warning devices shall not be mounted above the maximum height, specified by the device manufacturer.


## **ZONE A - FRONT WARNING LIGHTS**

There shall be one (1) Whelen Freedom F4X7RRRR-HEN LED 72" lightbar permanently mounted to the cab roof.


The lightbar configuration (streetside to curbside) shall be:

# SVI Trucks


## Configuration

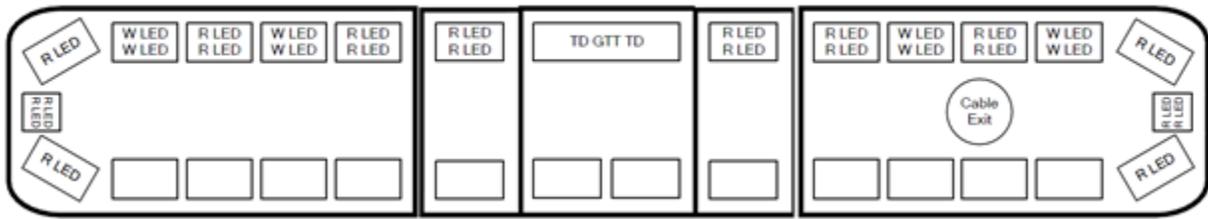


## Lenses

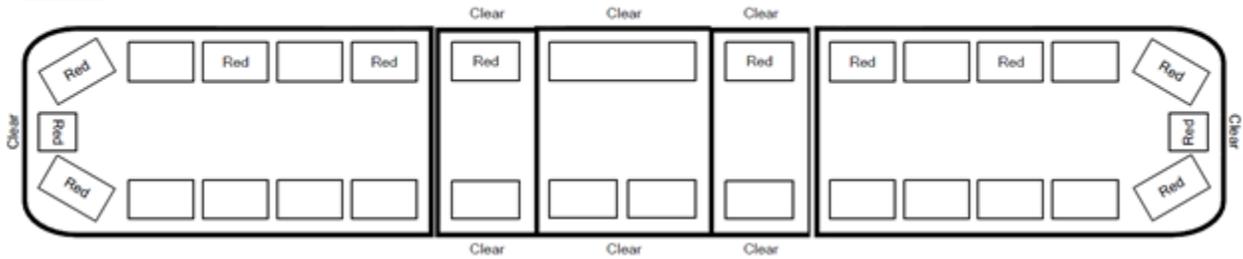

## Configuration

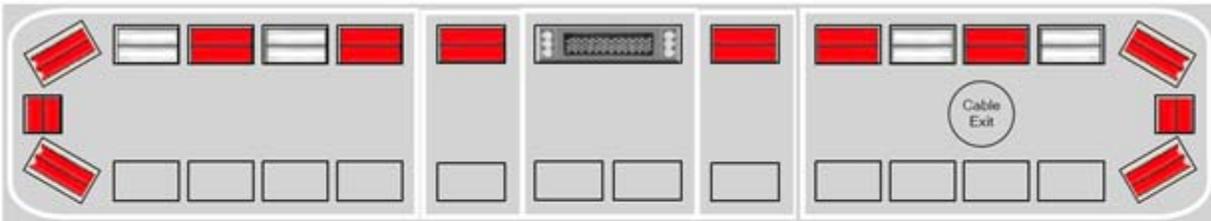

## Lenses

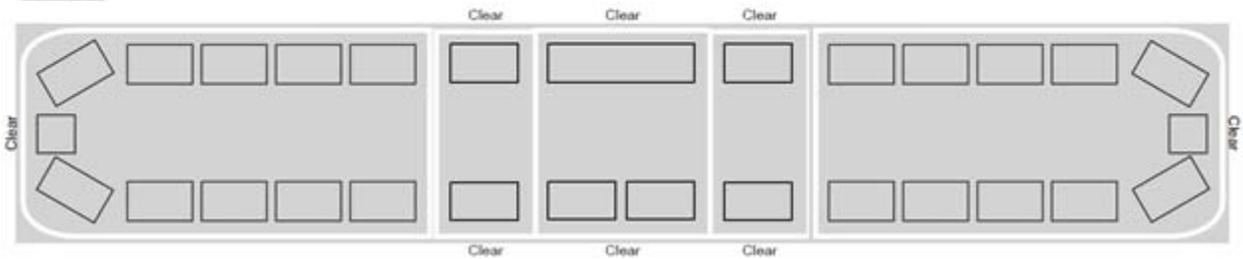

All clear lights {will/shall} shut down when the parking brake is set to comply with "Blocking" mod requirements as outlined in NFPA 1901.

SHOP NOTES

See drawing in spec

# SVI Trucks

The lightbar shall be separately switched at the vista display in the cab.

## ZONES B AND D - SIDE WARNING LIGHTS

### UPPER REAR CORNER WARNING LIGHTS

There shall be two (2) Whelen 900 series (9" x 7") Red Linear Super-LED lights (90RR5FRR) provided, one (1) each side. Each light shall have a red lens and chrome flange.

The lights shall be switched at the Vista display in the cab.

### UPPER FORWARD CORNER WARNING LIGHTS

There shall be two (2) Whelen 900 series (9" x 7") Red Linear Super-LED lights (90RR5FRR) provided, one (1) each side. Each light shall have a red lens and chrome flange.

The lights shall be switched at the Vista display in the cab.

## ZONE C - REAR WARNING LIGHTS

There shall be two (2) Whelen 900 series (9" x 7") Red Linear Super-LED lights (90RR5FRR) provided, one (1) each side. Each light shall have a red lens and chrome flange.

The lights shall be switched at the Vista display in the cab.

## LOWER LEVEL OPTICAL WARNING DEVICES

To define the clearance lines of the apparatus, the optical center of the lower-level optical warning devices in the front of the vehicle shall be mounted on or forward of the front axle centerline and as close to the front corner points of the apparatus as is practical.

The optical center of the lower-level optical warning devices at the rear of the vehicle shall be mounted on or behind the rear axle centerline and as close to the rear corners of the apparatus as is practical. The optical center of any lower-level device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground for large apparatus, and 18 in. and 48 in. (460 mm and 1600 mm) above level ground.

A midship optical warning device shall be mounted right and the left sides of the apparatus if the distance between the front and rear lower-level optical devices exceeds 25 ft (7.6 m) at the optical center. Additional midship optical warning devices shall be required, where necessary, to maintain a horizontal distance between the centers of adjacent lower-level optical warning devices of 25 ft (7.6 m) or less. The optical center of any midship mounted optical warning device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground.

## ZONE A - FRONT WARNING LIGHTS

The warning lights shall be supplied and installed by the cab/chassis manufacturer. They shall be Whelen lights to complete an NFPA compliant lower level warning light system.

The lights shall be switched at the Vista display in the cab.

## ZONES B AND D - CAB INTERSECTOR LIGHT (CAB FRONT CORNERS)

# SVI Trucks

The warning lights shall be supplied and installed by the cab/chassis manufacturer. They shall be Whelen lights to complete an NFPA compliant lower level warning light system.

The lights shall be switched at the Vista display in the cab.

## ZONES B AND D - BODY INTERSECTOR LIGHT (BODY WHEELWELL AREA)

There shall be two (2) Whelen 600 series (6" x 4") red Linear Super-LED lights (60R02FRR) provided, one (1) each side. Each light shall have a red lens and chrome flange.

The lights shall be switched at the Vista display in the cab.

## ZONES B AND D - BODY INTERSECTOR LIGHT (BODY REAR CORNERS)

There shall be two (2) Whelen 600 series (6" x 4") red Linear Super-LED lights (60R02FRR) provided, one (1) each side. Each light shall have a red lens and chrome flange.

The lights shall be switched at the Vista display in the cab.

## ZONE C - REAR WARNING LIGHTS (LOWER REAR CORNERS)

There shall be two (2) Whelen 700 series (7" x 3") red Linear Super-LED lights (70R02FRR) provided, one (1) each side. Each light shall have a red lens and chrome flange.

The lights shall be switched at the Vista display in the cab.

## LINE VOLTAGE ELECTRICAL SYSTEM

### DIESEL GENERATOR

An Onan model SD 20.0HDKAW-2008A, diesel driven generator shall be installed on the vehicle. The generator shall be installed so that fumes, vapors, heat, and vibrations do not enter the driving or crew compartment. The generator shall be rated at 20,000 watts continuous at 120/240 VAC, 166/83 amps, single phase. Current frequency shall be stable at 60 hertz.

Generator features shall include:

- 4-cylinder Kubota V2403-M diesel engine
- Brushless alternator
- Vibration isolated control box
- Muffler USDA approved spark arrestor
- Internal radiator
- Bottom mount radiator
- Intake silencer
- Replaceable element air cleaner
- Maintenance-free electronic governor
- Digital voltage regulation
- Regulated-voltage 30 A battery charging
- Hourmeter
- Instant one touch stop
- Electric fuel pump
- Vertically mounted fuel filter, spin on cartridge
- Full flow oil filter
- Automatic timed glow plugs for quick easy start
- Overvoltage, low oil pressure, overtemp, overspeed, overload, and AC alternator overtemp safeties

Overall size of generator shall 49" L x 24" W x 28" H and weigh 890 lbs.

# SVI Trucks

Sound: 60 Hz (single phase) 81.9 dB(A) at 10 ft before installation, full load.

Generator shall be equipped with a high temperature automatic shutdown system and a low oil (pressure or level) automatic shutdown system. The generator shall be installed in accordance with the generator manufacturer's requirements for ventilation and service accessibility.

If the generator is installed in a compartment and the compartment doors must be open during its operation, the generator shall be equipped with an interlock system to prevent its operation if the doors are not open, or the compartment shall be equipped with a high temperature alarm.

Permanently installed generators shall have readily accessible engine oil drain provisions or piping to a remote location for oil changing.

If the generator is located in a position on the apparatus where the operator cannot see the instrumentation and operate the controls while standing at ground level or positioned at a specifically designated operator station, an operating panel with the required instrumentation, start and stop controls, and other controls necessary for safe operation shall be provided at a remote operator's panel.

## **GENERATOR BONDING**

A minimum of four (4) 16" x 2 gauge copper ground straps shall be bolted to body sub-frame and chassis sub-frame for proper bonding of high voltage system. The conductor shall have a minimum amperage rating, as defined in 310.15, "Ampacities for Conductors Rated 0–2000 Volts," of *NFPA 70*, of 115 percent of the rated amperage on the power source specification label.

## **WARRANTY PERIOD**

Provided such goods are operated and maintained in accordance with Onan's written instructions, Onan warrants that the Generators shall be free from defects in material and workmanship for a period of two (2) years or two thousand (2,000) hours, whichever comes first, from the date of delivery to the first purchaser.

## **GENERATOR MOUNTING**

The generator shall be mounted in an upper dunnage area or roof compartment on rubber vibration isolators. The compartment shall be reinforced and ventilated where necessary to hold weight and provide cooling air for the generator. A valve shall be provided on the generator oil drain outlet and piped to underside of generator compartment with flexible hose and plug. The drain shall be located where easily accessible for generator service.

## **FUEL SYSTEM**

The generator fuel system shall be plumbed to the chassis main fuel tank. A separate fuel line shall be installed directly from the tank, not connected to the truck engine fuel line system. The generator fuel line shall be properly protected and secured inside of chassis frame. A shut-off valve shall be provided between the generator and fuel line as it enters the compartment.

Fuel lines shall be protected from chafing at all wear points. If the fuel source is shared with the apparatus engine, a separate fuel pickup system shall be provided that is arranged to ensure that the generator cannot utilize more than 75 percent of the fuel tank capacity.

# SVI Trucks

## **STARTING SYSTEM**

The generator starting system shall be powered by chassis battery system with heavy duty stranded copper cables. The starter line shall by-pass the chassis master switch to permit generator operation when the apparatus engine is not running. This starter line shall be of sufficient size for the generator, adequately protected and supported inside the chassis frame area.

## **COOLING**

Since the generator is radiator cooled, the ventilation of the generator is crucial. The installation shall permit operation of the unit both while the apparatus is stationary and while it is in motion.

The cooling air flow shall be through screened panels in the compartment doors. Two (2) dual Flex-a-lite fans will be installed to help direct the air flow through the compartment; one (1) fan will push the air into the compartment while the other fan pulls the air out.

The additional fans shall provide adequate air flow for operation of the generator in stationary or moving, with the compartment doors in the closed position.

## **EXHAUST SYSTEM**

The generator exhaust system shall be equipped with a residential type muffler for maximum quieting, and black iron rigid pipe to link the generator to the muffler.

The exhaust piping and discharge shall be located or shielded to prevent thermal damage to the apparatus or equipment. The exhaust shall be piped to the exterior of the vehicle and discharged at a location away from any operator's position.

Where parts of the exhaust system are exposed so that they can cause injury to operating personnel, protective guards shall be provided.

Silencing devices shall be provided and shall not create exhaust back pressure that exceeds the limits specified by the engine manufacturer.

## **MANUALS AND SCHEMATICS**

Two (2) complete manuals on parts list, maintenance, wiring schematics, hydraulic schematics, circuit boards, voltage regulator board and other components shall be provided on delivery.

## **GENERATOR COMPARTMENT INSULATION**

The generator compartment shall be provided with heavy duty sound insulation applied to walls and ceiling. Insulation shall have a high temperatures rating with a foil facing and attached to walls with a positive type fasteners, glue type adhesive shall not be acceptable.

## **GENERATOR CONTROLS**

In addition to generator controls provided at the generator, there shall be controls provided in the cab near the 12 volt control panel. The following controls shall be provided:

# SVI Trucks

- One (1) pre-heat switch (if generator is diesel).
- One (1) start/stop switch.
- One (1) generator running indicator light.

## **LOADCENTER**

The loadcenter shall be a Cutler Hammer, BR Series, specifically designed for protection and distribution of 120/240 volt AC, such as lighting and small motor branch circuits. The loadcenter enclosure shall be made of 16 gauge galvanized sheet steel. The galvanized coating provides corrosion protection and as such does not require paint. All trims used on the BR Loadcenter shall be chromate sealed and finished with electro disposition epoxy paint (ASA61) which exceeds requirements for outdoor and indoor applications. A combination surface/flush cover with integral door shall be supplied.

The loadcenter shall be UL/CSA listed, **NO EXCEPTIONS** will be allowed.

## **GENERATOR MONITORING PANEL**

To properly monitor the generator performance and load demand during operation, the generator installation shall be equipped with a full instrument monitor panel.

- Generator frequency in hertz
- Line 1 current in amperes
- Line 2 current in amperes
- Generator voltage in volts

The program shall support the accumulation of elapsed generator hours. Generator hours shall be displayed.

## **SHORE POWER INLET - BATTERY CHARGER**

The above mentioned shore power inlet, and battery conditioner shall be specified in the 12 volt section.

## **OUTLETS AND CIRCUITS**

The generator and or shore power shall supply the 120/240 volt electrical equipment and outlets outlined below. Proper circuit protection shall be installed as noted:

- Two (2) 120 volt exterior outlets, one (1) each side near rear wheel well area.
  - The outlet receptacle(s) shall be 20 amp, twist-lock (NEMA L5-20R).

## **INVERTER**

A Newmar model 12-3550 IC IP inverter shall be provided on vehicle that provides 3,000 continuous watts, and 6,000 watts for 5 seconds, 120 A battery charger rating, 120 VAC, 60 cycle output from 12 VDC. Inverter shall have a full function remote monitor/control panel. Unit shall be 14.5" H x 12" W x 14.5" D, and weigh 77 lbs.

An innovative new series of Inverter-Chargers called "Intelligence Plus" because of their multi-function capability to produce supplemental power for peak loads when running shore and generator sources and can limit its own AC power consumption when charging batteries, preventing AC system overloads. Integrated with a programmable smart 3-step high power charger, temperature compensation, alarms and other diagnostics, it has

# SVI Trucks

intelligence plus heavy duty electrical and mechanical design standards for high performance and survival in the rugged mobile environment.

The alternator and/or battery system shall be adequate to provide power for continuous operation for a minimum of 2 hours at full output.

Features;

- Heavy Duty Grade design and construction
- Pure sine “Perfect Wave” output runs sensitive electronics
- High surge ratings for motor starting
- Programmable input and output to match user profile and power availability
- High amperage three stage charger recovers batteries quickly
- Fast Transfer from stand by to full power status provides AC back up as UPS
- Supplements shore or generator power for peak loads
- Digital display on unit and remote provides easy monitoring
- Versatile bulk head or horizontal mounting options
- Rated for continuous output to 70°C
- Produces true sine wave, with excellent voltage regulation, and frequency stabilization
- Programmable to supplement shore and generator sources for peak load sharing
- High surge current capability for motor starting

Battery Charging;

- High Amperage temperature compensated, 3 step charger for main and auxiliary battery banks
- Programmable voltage and timer settings for virtually any battery type
- Programmable input current limit prevents overload of AC input source when charging dead batteries.

## **INVERTER BATTERY SUPPLY**

There shall be three (3) deep cycle batteries provided as the 12 VDC power source for the onboard inverter. The batteries shall incorporate Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance. The batteries shall be mounted in a stainless steel pan with hold down provisions for mobile application.

## **INVERTER BATTERY SUPPLY - VSR**

There shall be a BEP (or equal) voltage sensitive relay (VSR) provided with the specified inverter battery system. The VSR allows both the starting and inverter battery systems to be charged at the same time. When the engine is started and the starting batteries reaches 13.7 VDC, the VSR engages allowing both battery banks (starting and inverter) to be charged simultaneously. When the voltage drops below 12.8 VDC (e.g. the engine is stopped), the VSR disengages, separating the batteries.

This system eliminates the possibility of draining the starting batteries and protects sensitive electronic equipment powered from the house battery from harmful engine start up spikes. System shall be protected from overcharging from alternator with a 300 amp fuse. The VSR shall have a limited 5 year warranty.

## **SHORE POWER INLET - INVERTER**

A transfer switch shall be required to isolate one power source from the other where a circuit(s) is intended to be supplied from more than one power source. To protect both the generator and external power source from back feed, two (2) 120 volt, 30 ampere, 4PST auxiliary contact with safety interlock relay shall be installed. Relay shall cut-off the connection between the generator supply circuit and device circuits when shore power is connected.

# SVI Trucks

Transfer equipment, including transfer switches, shall operate such that all ungrounded conductors of one power source are disconnected before any ungrounded conductors of the second power source are connected. The neutral conductor shall be switched through the transfer switch. The apparatus shall have a label permanently affixed at the power inlet that indicates the line voltage, and amperage.

## **SHORE POWER INLET**

One (1) Kussmaul 120 VAC, 30 amp Super Auto-Eject shore power inlet(s) shall be provided. The shore power connection shall automatically disengage from vehicle when chassis ignition is engaged.

The protective ground from the shoreline inlet shall be bonded to the vehicle frame.

- The outlet cover shall be red.
- The shore power plug shall be located near the Driver door area.

Shore power shall be wired to the specified 120 volt inverter.

## **LINE VOLTAGE ELECTRICAL SYSTEM**

### **GENERAL REQUIREMENTS**

#### Stability

Any fixed line voltage power source producing alternating current (ac) shall produce electric power at 60 Hz,  $\pm 3$  Hz when producing power at all levels between no load and full rated power. Any fixed line voltage power source shall produce electric power at the rated voltage  $\pm 10$  percent when producing power at all levels between no load and full rated power.

The maximum voltage supplied to portable equipment shall not exceed 275 volts to ground. Higher voltage shall be permitted only when used to operate fixed wired, permanently mounted equipment on the apparatus.

#### Conformance with National Electrical Code

All components, equipment, and installation procedures shall conform to *NFPA 70, National Electrical Code*, except where superseded by the requirements of this chapter. Where the requirements of this chapter differ from those in *NFPA 70*, the requirements in this chapter shall apply.

Where available, line voltage electrical system equipment and materials included on the apparatus shall be listed and used only in the manner for which they have been listed. All equipment and materials shall be installed in accordance with the manufacturer's instructions.

#### Location Ratings

Any equipment used in a dry location shall be listed for dry locations. Any equipment used in a wet location shall be listed for wet locations.

Any equipment, except a PTO-driven generator, used in an underbody or under chassis location that is subject to road spray shall be either listed as Type 4 or mounted in an enclosure that is listed as Type 4.

# SVI Trucks

If a PTO-driven generator is located in an underbody or under chassis location, the installation shall include a shield to prevent road spray from splashing directly on the generator.

## Grounding

Grounding shall be in accordance with 250.34(A) and 250.34(B) of *NFPA 70*. Ungrounded systems shall not be used.

Only stranded or braided copper conductors shall be used for grounding and bonding.

The grounded current-carrying conductor (neutral) shall be insulated from the equipment-grounding conductors and from the equipment enclosures and other grounded parts.

The neutral conductor shall be colored white or gray in accordance with 200.6, "Means of Identifying Grounded Conductors," of *NFPA 70*.

Any bonding screws, straps, or buses in the distribution panel board or in other system components between the neutral and equipment-grounding conductor shall be removed and discarded.

# SVI Trucks

## Bonding

The neutral conductor of the power source shall be bonded to the vehicle frame. The neutral bonding connection shall occur only at the power source. In addition to the bonding required for the low voltage return current, each body and each driving or crew compartment enclosure shall be bonded to the vehicle frame by a copper conductor.

The conductor shall have a minimum ampere rating, as defined in 310.15, "Ampacities for Conductors Rated 0–2000 Volts," of *NFPA 70*, of 115 percent of the rated ampere on the power source specification label.

A single conductor that is sized to meet the low voltage and line voltage requirements shall be permitted to be used.

## Ground Fault Circuit Interrupters

In special service vehicles incorporating a lavatory, sink, toilet, shower, or tub, 120 V, 15 or 20 A receptacles within 6 ft (1.8 m) of these fixtures shall have ground fault circuit interrupter (GFCI) protection. GFCIs integrated into outlets or circuit breakers or as stand-alone devices shall be permitted to be used in situations.

## Power Source General Requirements

All power source system mechanical and electrical components shall be sized to support the continuous duty nameplate rating of the power source.

The power source shall be shielded from contamination that would prevent the power source from operating within its design specifications.

## Power Source Rating

For power sources of 8 kW or larger, the power source manufacturer shall declare the continuous duty rating that the power source can provide when installed on fire apparatus according to the manufacturer's instructions and run at 120°F (49°C) air intake temperature at 2000 ft (600 m) above sea level.

The rating on the power source specification label shall not exceed the declared rating from the power source manufacturer.

Access shall be provided to permit both routine maintenance and removal of the power source for major servicing. The power source shall be located such that neither it nor its mounting brackets interfere with the routine maintenance of the fire apparatus.

# SVI Trucks

## Instrumentation

If the power source is rated at less than 3 kW, a “Power On” indicator shall be provided. If the power source is rated at 3 kW or more but less than 8 kW, a voltmeter shall be provided.

If the power source is rated at 8 kW or more, the following instrumentation shall be provided at an operator’s panel:

- Voltmeter
- Current meters for each ungrounded leg
  - 1) Frequency (Hz) meter
  - 2) Power source hour meter

The instrumentation shall be permanently mounted at an operator’s panel. The instruments shall be located in a plane facing the operator. Gauges, switches, or other instruments on this panel shall each have a label to indicate their function.

The instruments and other line voltage equipment and controls shall be protected from mechanical damage and not obstructed by tool mounting or equipment storage.

An instruction plate(s) that provides the operator with the essential power source operating instructions, including the power-up and power-down sequence, shall be permanently attached to the apparatus at any point where such operations can take place.

## Operation

Provisions shall be made for placing the generator drive system in operation using controls and switches that are identified and within convenient reach of the operator.

Where the generator is driven by the chassis engine and engine compression brakes or engine exhaust brakes are furnished, they shall be automatically disengaged for generator operations.

Any control device used in the generator system power train between the engine and the generator shall be equipped with a means to prevent unintentional movement of the control device from its set position in the power generation mode.

If there is permanent wiring on the apparatus that is designed to be connected to the power source, a power source specification label that is permanently attached to the apparatus at the operator’s control station shall provide the operator with the information required.

The power source, at any load, shall not produce a noise level that exceeds 90 dBA in any driving compartment, crew compartment, or onboard command area with windows and doors closed or at any operator’s station on the apparatus.

## Power Supply Assembly

The conductors used in the power supply assembly between the output terminals of the power source and the main over current protection device shall not exceed 12 ft (4 m) in length.

All power supply assembly conductors, including neutral and grounding conductors, shall have an equivalent amperage rating and shall be sized to carry not less than 115 percent of the amperage of the nameplate current rating of the power source.

# SVI Trucks

If the power supply assembly connects to the vibrating part of a generator (not a connection on the base), the conductors shall be flexible cord or other fine-stranded conductors enclosed in metallic or nonmetallic liquid tight flexible conduit rated for wet locations and temperatures not less than 194°F (90°C).

# SVI Trucks

## Overcurrent Protection

Manually resettable over current devices shall be installed to protect the line voltage electrical system components.

## Power Source Protection

A main over current protection device shall be provided that is either incorporated in the power source or connected to the power source by a power supply assembly.

The size of the main over current protection device shall not exceed 100 percent of the rated amperage stated on the power source specification label or the rating of the next larger available size over current protection device, where so recommended by the power source manufacturer.

If the main over current protection device is subject to road spray, the unit shall be housed in a Type 4-rated enclosure.

## Branch Circuit Overcurrent Protection

Over current protection devices shall be provided for each individual circuit and shall be sized at not less than 15 amps in accordance with 240.4, "Protection of Conductors," of *NFPA 70*.

Any panel board shall have a main breaker where the panel has six or more individual branch circuits or the power source is rated 8 kW or larger.

Each over current protection device shall be marked with a label to identify the function of the circuit it protects.

Dedicated circuits shall be provided for any large appliance or device (air conditioning units, large motors, etc.) that requires 60 percent or more of the rated capacity of the circuit to which it is connected, and that circuit shall serve no other purpose.

## Panelboards

All fixed power sources shall be hardwired to a permanently mounted panel board unless one of the following conditions exists:

- 3) All line voltage power connections are made through receptacles on the power source and the receptacles are protected by integrated over current devices.
- 4) Only one circuit is hardwired to the power source, which is protected by an integrated over current device.

The panel shall be visible and located so that there is unimpeded access to the panel board controls. All panel boards shall be designed for use in their intended location. The panel(s) shall be protected from mechanical damage, tool mounting, and equipment storage.

Where the power source is 120/240 V and 120 V loads are connected, the apparatus manufacturer or line voltage system installer shall consider load balancing to the extent that it is possible.

# SVI Trucks

## Wiring Methods

Fixed wiring systems shall be limited to the following:

- 1) Metallic or nonmetallic liquid tight flexible conduit rated at temperatures not less than 194°F (90°C) with stranded copper wire rated for wet locations and temperatures not less than 194°F (90°C)
- 2) Type SOW, SOOW, SEOW, or SEOOW flexible cord rated at 600 V and at temperatures not less than 194°F (90°C)

Electrical cord or conduit shall not be attached to chassis suspension components, water or fuel lines, air or air brake lines, fire pump piping, hydraulic lines, exhaust system components, or low voltage wiring and shall be arranged as follows:

- 1) Separated by a minimum distance of 12 in. (300 mm) from exhaust piping or shielded from such piping
- 2) Separated from fuel lines by a minimum distance of 6 in. (150 mm)

A means shall be provided to allow “flexing” between the driving and crew compartment, the body, and other areas or equipment whose movement would stress the wiring.

Electrical cord or conduit shall be supported within 6 in. (150 mm) of any junction box and at a minimum of every 24 in. (600 mm) of run.

Supports shall be made of nonmetallic materials or of corrosion-resistant or corrosion-protected metal. All supports shall be of a design that does not cut or abrade the conduit or cord and shall be mechanically fastened to the apparatus.

Only fittings and components listed for the type of cord or conduit being installed shall be used.

Splices shall be made only in a listed junction box.

## Additional Requirements for Flexible Cord Installations

Where flexible cord is used in any location where it could be damaged, it shall be protected by installation in conduit, enclosures, or guards.

Where flexible cord penetrates a metal surface, rubber or plastic grommets or bushings shall be installed.

## Wiring Identification

Each line voltage circuit originating from the main panel board shall be identified.

The wire or circuit identification either shall reference a wiring diagram or wire list or shall indicate the final termination point of the circuit.

Where pre-wiring for future power sources or devices exists, the un-terminated ends shall be marked with a label showing their wire size and intended function.

# SVI Trucks

## Wiring System Components

Only stranded copper conductors with an insulation rated for temperatures of at least 194°F (90°C) and wet locations shall be used. Conductors in flexible cord shall be sized in accordance with Table 400.5(A) of *NFPA 70*. Conductors used in conduit shall be sized in accordance with 310.15, "Ampacities for Conductors Rated 0–2000 Volts," of *NFPA 70*. Aluminum or copper-clad aluminum conductors shall not be used.

All boxes shall conform to and be mounted in accordance with Article 314, "Outlet, Device, Pull, and Junction Boxes; Conduit Bodies; Fittings; and Manholes," of *NFPA 70*. All boxes shall be accessible using ordinary hand tools. Boxes shall not be permitted behind welded or pop-riveted panels.

The maximum number of conductors permitted in any box shall be in accordance with 314.16, "Number of Conductors in Outlet, Device, and Junction Boxes, and Conduit Bodies," of *NFPA 70*.

All wiring connections and terminations shall provide a positive mechanical and electrical connection. Connectors shall be installed in accordance with the manufacturer's instructions. Wire nuts or insulation displacement and insulation piercing connectors shall not be used.

Each switch shall indicate the position of its contact points (i.e., open or closed) and shall be rated for the continuous operation of the load being controlled. All switches shall be marked with a label indicating the function of the switch. Circuit breakers used as switches shall be "switch rated" (SWD) or better. Switches shall simultaneously open all associated line voltage conductors. Switching of the neutral conductor alone shall not be permitted.

Line voltage circuits controlled by low voltage circuits shall be wired through properly rated relays in listed enclosures that control all non-grounded current-carrying conductors.

## Receptacles and Inlet Devices

### Wet and Dry Locations

All wet location receptacle outlets and inlet devices, including those on hardwired, remote power distribution boxes, shall be of the grounding type, provided with a wet location cover, and installed in accordance with Section 406.8, "Receptacles in Damp or Wet Locations," of *NFPA 70*.

All receptacles located in a wet location shall be not less than 24 in. (600 mm) from the ground. Receptacles on off road fire apparatus shall be a minimum of 30 in. (750 mm) from the ground. All receptacles located in a dry location shall be of the grounding type and shall be at least 12 in. (300 mm) above the interior floor height. No receptacle shall be installed in a face-up position.

The face of any wet location receptacle shall be installed in a plane from vertical to not more than 45 degrees off vertical.

### Receptacle Label

Each receptacle shall be marked with a label indicating the nominal line voltage (120 volts or 240 volts) and the current rating in amps of the circuit. If the receptacle is DC or other than single phase, that information shall also be marked on the label.

All receptacles and electrical inlet devices shall be listed to UL 498, *Standard for Safety Attachment Plugs and Receptacles*, or other recognized performance standards.

# SVI Trucks

Receptacles used for DC voltages shall be rated for DC service.

## Wiring Schematics

An "As-Built" Wiring diagrams for line voltage systems shall be provided to include the following information;

- 1) Pictorial representations of circuit logic for all electrical components and wiring
- 2) Circuit identification
  - (a) Connector pin identification
  - (b) Zone location of electrical components
  - (c) Safety interlocks
  - (d) Alternator–battery power distribution circuits
  - (e) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems

## **120/240 VAC SCENE LIGHTING**

### **SIDE UPPER RECESSED SCENE LIGHTS**

Two (2) Fire Research Focus, model FCA200-M10, recessed light(s) shall be installed. They shall be equally divided between the curbside and streetside. The housing shall incorporate internal heat-dissipating fins and have cutout dimensions not to exceed 2" deep by 4 1/4" high by 16 1/8" wide. The lamphead shall protrude no more than 1 1/2" from the housing flange. Wiring shall extend from the bottom of the recessed housing.

The lamp head shall have one (1) quartz halogen 1000 watt 120 volt bulb. The bulb shall draw 8.3 amps and generate 22,000 lumens. The bulb shall be accessible through the front. The lamphead shall direct 50 percent of the light onto the action area while providing 50 percent to illuminate the working area. Lamphead and housing shall be powder coated white. The floodlight shall be UL listed as a scene light for fire service use.

Scene lights shall be provided with a lens or a means for preventing damage from water spray and shall be listed for wet location usage.

#### SHOP NOTES

Make: Fire Research

Model: Focus

P/N: FC200-M10

- (f) The above lights shall be controlled by two (2) switch(es) in the lower portion of compartment S1.

### **COMMAND LIGHT TOWER - PRE-WIRE**

The completed unit shall be pre-wired for the future installation of one (1) Command Light flood light tower(s). The pre-wire provisions shall include:

- (g) Circuit breaker in the breaker box (rated for proper amperage).
  - Wiring from the circuit breaker box to the future light tower location, terminating in a weatherproof box.
  - Wiring from the mounting area to the pre-determined location of the Command Light controller. (If no location is specified, the control wires shall terminate near the 12 volt distribution panel).
  - Mounting plates welded into the structure and pre-drilled.

## Light Tower Mounting

# SVI Trucks

The light tower shall be mounted to roof of the custom cab which shall be reinforced as necessary to support weight of the light tower.

## **INFORMATION TECHNOLOGY (IT) SYSTEMS**

All information technology systems specified below shall be supplied, installed, and supported by the contractor including, but not limited to the design, inter-connecting wiring, and integration of all specified systems. Under no circumstances will the installation of these systems be subcontracted

The following information technology systems shall be provided and installed on completed unit as follows;

### **NETWORK SYSTEM**

#### **DATA RACK #1**

##### **MIDDLE ATLANTIC 16U DATA RACK**

There shall be one (1) Middle Atlantic Products model # SRS4-16 slide-out style, EIA compliant 19" gangable equipment rack(s) provided and installed on completed vehicle.

Overall dimensions of rack shall be 19.06" W x 29.875" H x 18.88" D with 16 useable rack spaces and 250 lb. weight capacity.

Useable frame depth for installed components shall be 18.25", rack shall pull out 19" on integrated ball bearing slides for equipment servicing. Rack rail shall be 11-gauge steel with tapped 10-32 holes in universal EIA spacing.

Rack rail shall be finished in black e-coat with marked rack spaces. SRS rough-in pan shall be 14-gauge steel. Finish on SRS assembly shall be durable flat black powder coat.

Trim/locking panel shall lock SRS in closed position and be 11-gauge aluminum with brushed black anodized finish.

#### **DATA RACK ENCLOSURE**

Specified data rack shall have removable enclosed sides and front door with a powder coated painted finish over mounted components.

The PD-920R-NS rack mount power distribution unit is equipped with 8 circuit breaker protected rear outlets (NEMA 5-20R), and one front outlet (NEMA 5-15R). An illuminated combination power switch/circuit breaker is located on the front panel. UL listed in the US and Canada. Occupies one rack space.

#### **DATA SWITCH**

A data switch shall not be required in specified data rack.

#### **DATA ROUTER**

A data router shall not be required in specified data rack.

#### **RACK MOUNT COMPUTER SERVER**

# SVI Trucks

A server computer shall not be required in specified data rack.

## **Wi-Fi NETWORK**

A Wi-Fi network shall not be required on completed unit.

## **WIDE AREA NETWORK (WAN)**

No satellite Wide Area Network (WAN) internet connection shall be required on completed unit.

## **COMPUTERS**

No PC or desktop style computer(s) shall be required on completed unit.

## **COMPUTERS**

No laptop style computer(s) shall be required on completed unit.

## **ELECTRONIC PATCH PANEL**

An electronic patch panel shall be provided in the curbside cab ELFD compartment. Patch panel shall be located inside a Cast Products Phone box door with hinged and gasketed door for protection from elements. The followings audio/video input/outputs shall be properly labeled on panel and supplied as follows;

- One (1) pair RCA audio input
- 2. One (1) RCA video input
- Two (2) CAT 6 ports
- 1. Two (2) standard 2 pair phone jacks
- 2. Two (2) USB inputs
- 3. Two (2) HDMI jacks

All wiring shall terminate inside the specified data rack or cabinet.

## **SHOP NOTES**

Locate in cab curbside ELFD compartment

## **INTERNET CONNECTION**

### **DATA ROUTER - CELLULAR**

A cellular router shall not be required on completed unit.

### **AUDIO SYSTEM**

### **TELEPHONE SYSTEM**

No telephone system shall be required on completed unit.

### **VIDEO SYSTEM**

### **EXTERIOR VIDEO SYSTEM**

# SVI Trucks

No exterior body mounted video monitoring system shall be required on completed unit.

## **INTERIOR VIDEO SYSTEM**

No interior wall or ceiling mounted video monitoring system shall be required on completed unit.

## **TV SATELLITE ANTENNA**

No Satellite TV system shall be required with completed unit.

## **PRE-WIRE CAB VIDEO DISPLAYS**

Wiring provisions will be provided in the cab work area for FD installed flat panel multi-function displays.

Wiring will include all miscellaneous coax cable, 120 volt AC wiring, and cable connections.

### **SHOP NOTES**

Pre-wire only

- Specified monitor shall be mounted using a Ram Mount mounting system which consists of a heavy duty universal assembly that will attach a flat surface to another flat surface. Includes a universal base piece to mount heavy devices to a flat surface and a 4.75" x 4.75" face plate recommended for mounting heavy devices such as monitors and flat screen electronics. Features a hole pattern for 100mm and 75mm VESA standards.

## **EXTERIOR MONITOR PRE-WIRE**

Wiring provisions will be provided in the C2 compartment for FD installed flat panel multi-function display.

Wiring will include all miscellaneous coax cable, 120 volt AC wiring, and cable connections.

## **VIDEO CONFERENCING**

No video conferencing system shall be required on completed unit.

## **PRE-WIRE BOSCH AUDIO/VIDEO RECORDER**

There shall be one (1) wiring provision for a future installation of Bosch DVR-650-16A200 Digital Video Recorder with internal DVD writer, 16 channels, and 2 TB storage provided and installed on completed vehicle.

### **SHOP NOTES**

Pre-Wire only

## **AGILE MESH VIDEO**

No Agile Mesh video system shall be required on completed unit.

## **HELICOPTER DOWNLINK SYSTEM**

# SVI Trucks

No helicopter downlink system shall be required on completed unit.

## ENTRYLINK SYSTEM PRE-WIRE

No Con-Space EntryLink system pre-wire shall be required on completed unit.

## PRE-WIRE FOR AUDIO VIDEO CONTROL AND AUTOMATION SYSTEM

Wiring provisions will be installed for the future installation of one (1) AMX NI-3100 (or equal) control station with RS232/422/485 control shall be used to operate and control the on-board audio and video system equipment.

SHOP NOTES

Pre-wire

## PRE-WIRE MATRIX SWITCHER - VGA

Provision will be provided in the data rack for the future installation of a Extron MVX 128 (or equal) VGA matrix switcher.

SHOP NOTES

pre-wire

## TOUCH PANEL CONTROL

Wiring provisions will be provided for the future installation of two (2) AMX Modero NXD-700i (or equal), wall/flush mount 7" color touch-panel interface unit(s) shall be provided and located as follows;

4. One (1) in each desk top component console

SHOP NOTES

pre-wire

## RADIO AND COMMUNICATION SYSTEM

### RADIO SYSTEM

No radio system shall be required on completed unit.

5. There shall be one (1) WeatherPak® TRx2 Vehicle Mount weather station provided and installed on completed vehicle. The WeatherPak® TRx2 shall have the following features; Automatically updates CAMEO/ ALOHA plume modeling software. Sensor suite consists of an ultrasonic (no-moving-parts) wind speed and direction sensor, automatic compass, air temperature and relative humidity (No barometer). WEATHERPAK® is hardwired to display unit which features backlit vacuum florescent digital display and serial data output cable to PC. Constructed of rugged, non-sparking aluminum, designed to intrinsically safe standards the WEATHERPAK® can be assembled in approximately one minute without tools. Carry case and ballistic nylon tripod bag included. **Tested and meets or exceeds MIL-STD-810F, MIL-STD-461E and MIL-STD-462**
  - **WEATHERPAK®** Electronics With Microprocessor, Transient Protection, Heavy-Duty Mil-Spec Waterproof Housing.

# SVI Trucks

- **SENSOR: ELECTRONIC COMPASS** Automatically Aligns System to True North.
- **SENSOR: WIND SPEED/ DIRECTION MONITOR** – Professional grade Ultrasonic no-moving-parts (No periodic calibration needed)
- **SENSOR: AIR TEMPERATURE/ RELATIVE HUMIDITY**
- **RECEIVER/ DISPLAY:** VFD Digital Data Display, Battery Back-Up & 6' Serial Data-Out Cable to PC.
- **ABS CARRY CASE FOR WEATHERPAK®:** Hard-Sided With Custom Cut Foam Inserts.

## **WEATHER SYSTEM MOUNTING**

The weather system shall be mounted on a Fire Research model 530 series side mount push up telescopic pole. The pole shall be anodized aluminum and have a knurled twist lock mechanism to secure the extension pole in position. The extension pole shall rotate 360 degrees. The outer pole shall be a grooved aluminum extrusion and qualify as an NFPA compliant handrail. The pole mounting brackets shall have a 2 3/4" offset. Wiring shall extend from the pole bottom with a 4' retractile cord. Pole shall be supplied with hazard switch option and wired to door ajar circuit to warn when pole is in the up position.

## **WEATHER STATION MOUNT AND PRE-WIRE**

A push-up pole for the will be located in the rear stairway area to hold a FD supplied weather station. The pole will be installed as to be flush with the body in the lowered position.

The pole will be wired for 12VDC power to use with the weather station. The FD will provide the make and model of the weather station are the time of the pre-construction meeting.

### **SHOP NOTES**

Push-up pole mount with 12VDC power for FD supplied weather station located in the rear stairway area.

## **PRE-WIRE COMMAND CAMERA SYSTEM**

There shall be wiring provisions for a future installation of one (1) Bosch MIC-550-ALB36N with Pan-Tilt-Zoom (PTZ), NTSC with integrated wiper and heater provided and installed on the specified mast.

## **PRE-WIRE TELESCOPING PNEUMATIC MAST**

Provisions will be provided for the future installation of one (1) Will-Burt 7-42 heavy duty pneumatic powered telescoping mast(s). The mast shall utilize air from the chassis brake system. Air to operate the telescoping mast must be drawn from a drier system and be regulated to 20 psig and shall have a back pressure protection valve.

## **MAST MOUNTING - EXTERNAL**

The above telescoping mast shall be mounted using an external mounting kit attached to the rear body panel. The mast shall be enclosed with a removable 3/16" smooth aluminum enclosure located on the rear of the body extending from bumper level upward to enclose mast. 2" x 2" x 1/4" angles shall be welded to rear body panel for attachment of enclosure to body. The mast enclosure shall be provided to protect the control cables, air hoses, and the mast from the elements. The specified camera system shall extend above the enclosure, but still be lower than body height.

Controls for the mast shall be recessed into mast enclosure in a Cast Products aluminum box with hinged door. A removable panel shall be provided on side for access to lower section of mast for maintenance purposes.

# SVI Trucks

A stainless steel scuff plate shall be provided on upper section of rear body panel to prevent scuffing of Nycoil cable on body surface.

## **PRINTER/COPIER/SCAN/FAX**

Wiring and mounting provisions will be provided for a FD supplied HP OfficeJet 6800e (or equal) All-In-One printer/copier/scan/fax with built-in wireless wi fi shall be provided on completed unit. Printer shall be secured to shelf or countertop for mobile application.

Unit shall be complete and fully operational, including all required cabling, 120 volt AC wiring, and cable connections. All paperwork and software provided with purchased unit shall be provided in a plastic sleeve attached to unit when delivered.

### **SHOP NOTES**

Wiring and mounting provisions above data rack

## **PHONE AND NETWORK CABLING STANDARDS**

If a telephone or fax machine is specified it will be connected to the central phone system from the RJ-11 wall jacks and wired through to the data rack or technical cabinet using yellow Category 6, 4 pair twisted copper cabling with yellow boot ends.

If a computer network is specified it will be connected to the network switch location, if specified from the RJ-45 wall jacks wired through to the data rack or technical cabinet using blue Category 6, 4 pair twisted copper cabling with blue boot ends. The pin pair assignments will be based on the T568B standard configuration. The termination ends in shall be RJ-45 male ends and connected to the network switch.

Only Category 6, 4 pair twisted copper cable shall be used for all computer cabling for improved transmission performance and superior immunity from external noise. All wiring shall be installed to Institute of Electrical and Electronics Engineers (IEEE) 802 standards.

All Category 6 cable must be properly installed and terminated to meet specifications. Incorrect installation practices include kinking or bending the cable too tightly will not be allowed. The cable bend radius should be no less than 4 times the outer diameter of the cable. Incorrect termination practices include untwisting the wire pairs or stripping the outer jacket back too far will not be allowed. When used for 10/100/1000 BASE-T, the maximum allowed length of a Category 6 cable is 100 meters (330 ft). All cabling shall be properly labeled at both termination ends for proper identification in future.

The running of Category 6 cabling in the same loom with any VAC wiring will not be allowed.

## **WIRING CHANNELS**

Minimum 4" x 4" wiring channels shall be provided directly below the desk tops along the outside walls for computer, radio, and communications wiring. The top of desk tops shall have minimum 3" diameter openings that drop directly into wiring channel. The wiring channels shall have openings for future wiring installation and access. The wiring channels shall run as direct as possible to the data rack or technical cabinet location with several cross overs provided in roof structure for running wiring across body.

## **EQUIPMENT PAYLOAD WEIGHT ALLOWANCE**

# SVI Trucks

In compliance with NFPA 1901 standards, the special service vehicle shall be designed for an equipment loading allowance of 4,000 lbs. of Henderson Fire Department provided equipment based on a 30,001 - 40,000 pound gross vehicle weight rating.

## **EQUIPMENT**

The following equipment shall be furnished with the completed special service vehicle;

- One (1) container of assorted stainless steel nuts, bolts, screws and washers used in the construction of the apparatus shall be provided with the completed apparatus.
- There shall be two (2) Zico SAC-44-E NFPA approved folding aluminum wheel chocks provided for 44" diameter tires that together will hold the vehicle when loaded to its GVWR or GCWR, on a hard surface with a 20 % grade, with the transmission in neutral, and the parking brake released.
  - The wheel chock(s) shall be mounted behind rear wheels, below body on streetside. The mounts will be spaced 6" apart.

## SHOP NOTES

Have min 6" space between mounts

## **FLASHLIGHT PRE-WIRE**

There will be wiring provision for two (2) FD installed flashlights in the body compartments. Location TBD at pre-construction.

## **REMAINING NFPA MINOR EQUIPMENT BY PURCHASER**

All other minor equipment not specified above, but required by NFPA 1901 for special service vehicles, section 10.5.1 shall be supplied and mounted by Henderson Fire Department before the unit is placed in emergency service.

100% Pre-Pay Discount