

Riverside County Fire Department
Perris, CA
Heavy Rescue- SVI#1306
(Spartan ER)
Production Specification



Customer Approval: _____

Date: _____

LIABILITY INSURANCE

The manufacturer shall furnish with the bid a certificate of insurance for;

Workman's Compensation and Employer's Liability Insurance covering for all employees.

General Liability (each occurrence) of \$1,000,000.00. General Aggregate coverage of \$2,000,000.00. Products Completed / Operations Aggregate coverage of \$2,000,000.00. Medical Expense coverage of \$5,000 (any one person). Personal Injury of \$1,000,000.00.

Automobile liability of \$1,000,000.00 combined single limit (each accident), including any auto, all owned autos, scheduled autos, hired autos, non-owned autos, and garage liability.

Excess Umbrella Liability coverage of \$6,000,000.00 each occurrence, Aggregate of \$6,000,000.00. Garage Keepers Liability coverage of \$6,000,000.00 combined limit.

All insurance policies must be;

- Maintained for the life of the contract,
- Must provide ten (10) days notice before cancellation,
- Must cover all operations of the contractor, or anyone employed by them.

INTERNET IN-PROCESS SITE

The manufacturer shall post and maintain a website where the Riverside County Fire Department will be able to view digital images of their apparatus as its being built. The digital images shall be posted once a week starting when the body begins production or when the cab/chassis arrives and shall continue until the final completion of unit.

RESPONSIBILITY OF PURCHASER

It shall be the responsibility of the purchaser to specify the details of the apparatus in addition to the requirements in NFPA 1900 needed by the manufacturer to build the apparatus, including:

- 1) Requirements not uniquely specified in NFPA 1900, such as the type of apparatus desired.
- 2) Any features of the apparatus desired in addition to, or in excess of, the requirements in NFPA 1900.

After acceptance of the fire apparatus, the purchaser shall be responsible for ongoing training of personnel to develop and maintain proficiency regarding the proper and safe use of the apparatus and the associated equipment.

RESPONSIBILITY OF CONTRACTOR

The Contractor shall provide a detailed description of the apparatus, a list of equipment to be furnished, and other construction and performance details to which the apparatus shall conform. The detailed description of the apparatus shall include, but shall not be limited to,

1. Estimated In-Service Weight,
2. Wheelbase, Turning Clearance Radius,
3. Principal dimensions, Angle of Approach, Angle of Departure,
4. Transmission, Axle Ratios.

The Contractor's detailed description shall include a statement specifically describing each aspect of the delivered apparatus that will not be fully compliant with the requirements of this standard.

The purpose of these Contractor specifications shall be to define what the contractor intends to furnish and deliver to the purchaser.

Responsibility for the apparatus and equipment shall remain with the contractor until they are accepted by the purchaser.

VEHICLE STABILITY SUPPLIED WITH CAB/CHASSIS

The cab/chassis shall be equipped with a stability control system. The system shall have, at a minimum, a steering wheel position sensor, a vehicle yaw sensor, a lateral accelerometer and individual wheel brake controls.

FIRE APPARATUS PERFORMANCE

The fire apparatus shall meet the requirements of this standard at elevations of 2000 ft (600 m) above sea level.

The fire apparatus shall meet all the requirements of this standard while stationary on a grade of 6 percent in any direction.

The fire apparatus shall meet the requirements of this standard in ambient temperature conditions between 32°F (0°C) and 110°F (43°C).

HIGHWAY PERFORMANCE

The apparatus, when loaded to its estimated in-service weight, shall be capable of the following performance while on dry, paved roads that are in good condition:

- 1) Accelerating from 0 to 35 mph (55 km/hr) within 25 seconds on a 0 percent grade
- 2) Attaining a speed of 50 mph (80 km/hr) on a 0 percent grade
- 3) Maintaining a speed of at least 20 mph (32 km/hr) on any grade up to and including 6 percent

The maximum top speed of fire apparatus with a GVWR over 26,000 lb (11,800 kg) shall not exceed either 68 mph (109 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

If the combined water tank and foam agent tank capacities on the fire apparatus exceed 1250 gal (4732 L), or the GVWR of the vehicle is over 50,000 lb (22,680 kg), the maximum top speed of the apparatus shall not exceed either 60 mph (95 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

SERVICEABILITY

The fire apparatus shall be designed to allow the manufacturer's recommended routine maintenance checks of lubricant and fluid levels to be performed by the operator without lifting the cab of a tilt-cab apparatus or without the need for hand tools.

Where special tools are required for routine service on any component of the apparatus, such tools shall be provided with the apparatus.

Apparatus components that interfere with repair or removal of other major components shall be attached with fasteners, such as cap screws and nuts, so that the components can be removed and installed with ordinary hand tools. These components shall not be welded or otherwise permanently secured into place.

FIRE APPARATUS DOCUMENTATION

The contractor shall supply, at the time of delivery, at least one (1) copy of the following documents:

- 1) The manufacturers record of apparatus construction details, including the following documents:
 - a) Owner's name and address
 - b) Apparatus manufacturer, model, and serial number
 - c) Chassis make, model, and serial number
 - d) GAWR of front and rear axles and GVWR
 - e) Front tire size and total rated capacity in pounds (kilograms)
 - f) Rear tire size and total rated capacity in pounds (kilograms)
 - g) Chassis weight distribution in pounds (kilograms) with water and manufacturer-mounted equipment (front and rear)
 - h) Engine make, model, serial number, rated horsepower and related speed, and governed speed; and if so equipped, engine transmission PTO(s) make, model, and gear ratio
 - i) Type of fuel and fuel tank capacity
 - j) Electrical system voltage and alternator output in amps
 - k) Battery make, model, and capacity in cold cranking amps (CCA)
 - l) Chassis transmission make, model, and serial number; and if so equipped, chassis transmission PTO(s) make, model, and gear ratio
 - m) Ratios of all driving axles
 - n) Maximum governed road speed
 - o) Pump make, model, rated capacity in gallons per minute (liters per minute where applicable), maximum discharge pressure capability rating, and serial number
 - p) Pump transmission make, model, serial number, and gear ratio
 - q) Auxiliary pump make, model, rated capacity in gallons per minute (liters per minute where applicable), and serial number
 - r) Water tank certified capacity in gallons or liters
 - s) Foam tank (if provided) certified capacity in gallons (liters)
 - t) Aerial device type, rated vertical height in feet (meters), rated horizontal reach in feet (meters), and rated capacity in pounds (kilograms)
 - u) Paint manufacturer and paint number(s)
 - v) Company name and signature of responsible company representative
 - w) Weight documents from a certified scale showing actual loading on the front axle, rear axle(s), and overall fire apparatus (with the water tank full but without personnel, equipment, and hose)
- 2) Certification of compliance of the optical warning system (*see 10.7.17*)
- 3) Siren manufacturer's certification of the siren (*see 10.8.1.1*)
- 4) Written load analysis and results of the electrical system performance tests (*see 10.13.1 and Section 10.14*)
- 5) Certification of slip resistance of all stepping, standing, and walking surfaces (*see 12.6.4.5*)
- 6) If the apparatus has a fire pump, or a wildland fire pump, the pump manufacturer's certification of suction capability (*see 13.2.4.1 or 15.2.4.1*)
- 7) If the apparatus is equipped with a fire pump or a wildland fire pump and special conditions are specified by the purchaser, the pump manufacturer's certification of suction capacity under the special conditions (*see 13.2.4.2 or 15.2.4.2*)
- 8) If the apparatus has a fire pump, or a wildland fire pump a copy of the apparatus manufacturer's approval for stationary pumping applications (*see 13.3.1 or 15.3.1*)
- 9) If the apparatus has a fire pump, the engine manufacturer's certified brake horsepower curve for the engine furnished, showing the maximum governed speed (*see 13.3.2.2*)
- 10) If the apparatus has a fire pump or a wildland fire pump, the pump manufacturer's certification of the hydrostatic test (*see 13.5.2.2 or 15.5.2.2*)

- 11) If the apparatus has a fire pump with a maximum discharge pressure capability rating that exceeds the hydrostatic test pressure of 13.5.2.1, the pump manufacturer's certification of the hydrodynamic test
- 12) If the apparatus has a fire pump or a wildland fire pump, the certification of inspection and test for the fire pump (see 13.13.1.1.5 or 13.13.1.2.4 or 15.13.1.2.4 as applicable)
- 13) If the apparatus is equipped with an auxiliary pump, the apparatus manufacturer's certification of the hydrostatic test (see Section 14.13)
- 14) When the apparatus is equipped with a water tank, the certification of water tank capacity (see Section 17.6)
- 15) If the apparatus has an aerial device, the certification of inspection and test for the aerial device (see Section 20.31)
- 16) If the apparatus has an aerial device, all the technical information required for inspections to comply with NFPA 1910
- 17) If the apparatus has a foam proportioning system, the foam proportioning system manufacturer's certification of accuracy (see 18.10.4.2) and the final installer's certification the foam proportioning system meets this standard (see 18.11.2)
- 18) If the system has a CAFS, the documentation of the manufacturer's pre delivery tests (see Section 19.9)
- 19) If the apparatus has a line voltage power source, the certification of the test for the power source (see 21.15.7.2)
- 20) If the apparatus is equipped with an air system, air tank certificates (see 23.5.1.2), the SCBA fill station certification (see 23.9.6), and the results of the testing of the air system installation (see 23.14.5 and 23.15.4)
- 21) For wildland fire apparatus, or structural apparatus without stability control, certification of vehicle side slope stability, including the weight distribution assumed for the calculations or as loaded on the vehicle for the tilt table test (see 7.14.3)
- 22) Any other required manufacturer test data or reports

OPERATIONS AND SERVICE DOCUMENTATION

The contractor shall deliver with the fire apparatus complete operation and service documentation covering the completed apparatus as delivered and accepted.

The documentation shall address at least the inspection, service, and operations of the fire apparatus and all major components thereof.

The contractor shall also deliver with the fire apparatus the following documentation for the entire apparatus and each major operating system or major component of the apparatus:

- 1) Manufacturer's name and address
- 2) Country of manufacture
- 3) Source for service and technical information
- 4) Parts replacement information
- 5) Descriptions, specifications, and ratings of the chassis, pump (if applicable), and aerial device (if applicable)
- 6) Wiring diagrams for low voltage and line voltage systems to include the following information:
 - a) Pictorial representations of circuit logic for all electrical components and wiring
 - b) Circuit identification
 - c) Connector pin identification
 - d) Zone location of electrical components
 - e) Safety interlocks
 - f) Alternator–battery power distribution circuits
 - g) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems
- 7) Lubrication charts
- 8) Operating instructions for the chassis, any major components such as a pump or aerial device, and any auxiliary systems
- 9) Precautions related to multiple configurations of aerial devices, if applicable
- 10) Instructions regarding the frequency and procedure for recommended maintenance
- 11) Overall apparatus operating instructions
- 12) Safety considerations

- 13) Limitations of use
- 14) Inspection procedures
- 15) Recommended service procedures
- 16) Troubleshooting guide
- 17) Apparatus body, chassis and other component manufacturer's warranties
- 18) Special data required by this standard
- 19) A material safety data sheet (MSDS) for any fluid that is specified for use on the apparatus

The contractor shall deliver with the apparatus all manufacturer's operations and service documents supplied with components and equipment that are installed or supplied by the contractor.

NFPA REQUIRED DOCUMENTATION FORMAT - Online @ SVI Trucks . com

The vehicle construction details and the operations and service documentation as required per NFPA 1900 latest edition shall be provided online. These manuals shall be divided into sections for ease of reference and will include two (2) QR codes installed on the apparatus for accessibility, with an additional 2 QR codes shipped loose.

FIRE APPARATUS SAFETY GUIDE

A Fire Apparatus Safety Guide published by Fire Apparatus manufacturer's Association shall be provided with delivered vehicle. This manual includes essential safety information for fire fighters, fire chiefs, apparatus mechanics, and fire department safety officers. The guide is applicable to municipal, wildland, and airport fire fighting apparatus manufactured on either custom or commercial chassis.

STATEMENT OF EXCEPTIONS

The final-stage manufacturer shall deliver with the fire apparatus either a certification that the apparatus fully complies with all requirements of this standard or alternatively, a Statement of Exceptions specifically describing each aspect of the completed apparatus that is not fully compliant with the requirements of this standard at the time of delivery.

The Statement of Exceptions shall contain, for each noncompliant aspect of the apparatus or missing required item, the following information:

- 1) A separate specification of the section of the applicable standard for which compliance is lacking
- 2) A description of the particular aspect of the apparatus that is not in compliance therewith or required equipment that is missing
- 3) A description of the further changes or modifications to the delivered apparatus that must be completed to achieve full compliance
- 4) Identification of the entity that will be responsible for making the necessary post delivery changes or modifications or for supplying and installing any missing required equipment to the apparatus to achieve full compliance with this standard

Prior to or at the time of delivery of the apparatus, the Statement of Exceptions shall be signed by an authorized agent of the entity responsible for final assembly of the apparatus and by an authorized agent of the purchasing entity, indicating mutual understanding and agreement between the parties regarding the substance thereof.

CARRYING CAPACITY

The GAWR and the GCWR or GVWR of the chassis shall be adequate to carry the weight of the completed vehicle when loaded to its estimated in-service weight. The manufacturer shall establish the estimated in service weight during the design of the vehicle.

The estimated in-service weight shall include the following:

1. The chassis, body and tank(s)
2. Full fuel, lubricant, and other chassis or component fluid tanks or reservoirs
3. Full water and other agent tanks
4. *250 lb (114 kg) in each seating position
5. Fixed equipment such as pumps, aerial devices, generators, reels and air systems as installed
6. Ground ladders, suction hose, designed hose load in their hose beds and on their reels
7. An allowance for miscellaneous equipment that is the greatest of the following:
 - a) The values shown for items 1 - 7
 - b) A purchaser-provided list of equipment to be carried with weights
 - c) A purchaser-specified miscellaneous equipment allowance

The manufacturer shall engineer and design the fire apparatus such that the completed apparatus, when loaded to its estimated in-service weight, with all movable weights distributed as close as is practical to their intended in-service configuration, does not exceed the GVWR.

A final manufacturer's certification of the GVWR or GCWR, along with a certification of each GAWR, shall be supplied on a label affixed to the vehicle.

The fire apparatus manufacturer shall permanently affix a high-visibility label in a location visible to the driver while seated.

The label shall show the height of the completed unequipped fire apparatus in feet and inches (meters), the length of the completed fire apparatus in feet and inches (meters), and the GVWR in tons (metric tons).

Wording on the label shall indicate that the information shown was current when the apparatus was manufactured and that, if the overall height changes while the vehicle is in service, the fire department must revise that dimension on the plate.

Apparatus Type	Equip. Storage Area	Apparatus Size	Equipment Allowance	
			lb.	kg.
Special Service Fire Apparatus	Minimum of 120 cu ft (3.4 cu mt) of enclosed compartmentation.	10,000 lb to 15,000 lb (4,500 kg to 7,000 kg) GVWR	2,000	910
		15,001 lb to 20,000 lb (7,001 kg to 9,000 kg) GVWR	2,500	1,135
		20,001 lb to 30,000 lb (9,001 kg to 14,000 kg) GVWR	3,000	1,350
		30,001 lb to 40,000 lb (14,001 kg to 18,000 kg) GVWR	4,000	1,800
		40,001 lb to 50,000 lb (18,001 kg to 23,000 kg) GVWR	6,000	2,700
		50,001 lb to 60,000 lb (23,001 kg to 27,000 kg) GVWR	8,000	3,600

		60,001 lb and up (27,001 kg) GVWR	10,000	4,500
--	--	---	--------	-------

TESTING

ROAD TEST

Each apparatus shall be tested by the manufacturer before delivery to verify that it meets the following criteria;

Tests shall be conducted at a location and in a manner that does not violate local, state or provincial, or federal traffic laws. Tests shall be conducted on a dry, level, paved surface that is free of loose material, oil, or grease. Tests shall be conducted with the water and foam tanks full (water or product).

The apparatus shall accelerate from 0 to 35 mph (55 km/hr) within 25 seconds. The apparatus shall attain a speed of 50 mph (80 km/hr).

The auxiliary braking system, if so equipped, shall function as intended by the auxiliary braking system manufacturer.

The air service brakes shall bring the apparatus to a complete stop from a speed of 20 mph (32.2 km/hr) in a distance not exceeding 35 ft (10.7 m).

The hydraulic service brakes shall bring the apparatus to a complete stop from a speed of 30 mph (48.2 km/hr) in a distance not exceeding 88 ft (26.8 m).

LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST

The vehicles low voltage electrical system shall be tested and certified by the manufacturer. The certified test results shall be delivered with the completed vehicle. Tests shall be performed when the air temperature is between 0°F and 110°F (-18°C and 43°C).

TEST SEQUENCE

The following three (3) tests shall be performed in the order in which they appear below. Before each test, the batteries shall be fully charged until the voltage stabilizes at the voltage regulator set point and the lowest charge current is maintained for ten (10) minutes. Failure of any of these tests shall require a repeat of the sequence.

1. RESERVE CAPACITY TEST

The engine shall be started and kept running until the engine and engine compartment temperatures are stabilized at normal operating temperatures and the battery system is fully charged. The engine shall be shut off and the minimum continuous electrical load shall be activated for ten (10) minutes.

All electrical loads shall be turned off prior to attempting to restart the engine. The battery system shall then be capable of restarting the engine. Failure to restart the engine shall be considered a test failure of the battery system.

2. ALTERNATOR PERFORMANCE TEST

TEST AT IDLE

The minimum continuous electrical load shall be activated with the engine running at idle speed. The engine temperature shall be stabilized at normal operating temperature. The battery system shall be tested to detect the presence of battery discharge current. The detection of battery discharge current shall be considered a test failure.

TEST AT FULL LOAD

The total continuous electrical load shall be activated with the engine running up to the engine manufacturer's governed speed. The test duration shall be a minimum of two (2) hours. Activation of the load management system shall be permitted during this test.

An alarm sounded by excessive battery discharge, as detected by the warning system required in 13.3.4, or a system voltage of less than 11.8 V dc for a 12 V nominal system, 23.6 V dc for a 24 V nominal system, or 35.4 V dc for a 42 V nominal system for more than 120 seconds shall be considered a test failure.

3. LOW VOLTAGE ALARM TEST

The following test shall be started with the engine off and the battery voltage at or above 12 V for a 12 V nominal system, 24 V for a 24 V nominal system or 36 V for a 42 V nominal system.

With the engine shut off, the total continuous electrical load shall be activated and shall continue to be applied until the excessive battery discharge alarm activates. The battery voltage shall be measured at the battery terminals.

The test shall be considered a failure if the alarm does not sound in less than 140 seconds after the voltage drops to 11.70 V for a 12 V nominal system, 23.4 V dc for a 24 V nominal system, or 35.1 V for a 42 V nominal system.

The battery system shall then be able to restart the engine. Failure to restart the engine shall be considered a test failure.

LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST

DOCUMENTATION

The manufacturer shall deliver the following with the fire apparatus:

- 1) Documentation of the electrical system performance tests
- 2) A written electrical load analysis, including the following:
 - a) The nameplate rating of the alternator
 - b) The alternator rating
 - c) Each of the component loads specified that make up the minimum continuous electrical load
 - d) Additional electrical loads that, when added to the minimum continuous electrical load, determine the total continuous electrical load
 - e) Each individual intermittent electrical load

UL 120/240 VAC CERTIFICATION

The 120/240 volt electrical system shall be third-party, independent, audit-certified through Underwriters Laboratory (UL) to the current edition of NFPA 1900 to perform as listed below;

The prime mover shall be started from a cold start condition, and the unloaded voltage and frequency shall be recorded.

The line voltage electrical system shall be loaded to at least 100% of the continuous rated wattage stated on the power source specification label. Testing with a resistive load bank shall be permitted.

The power source shall be operated in the manner specified by the apparatus manufacturer as documented on instruction plates or in operation manuals. The power source shall be operated at a minimum of 100% of the continuous rated wattage as stated on the power source specification label for a minimum of two (2) hours.

The load shall be adjusted to maintain the output wattage at or above the continuous rated wattage during the entire 2-hour test.

The following conditions shall be recorded at least every 1/2 hour during the test:

- 1) The power source output voltage, frequency and amperes
- 2) The prime mover's oil pressure, water temperature and transmission temperature, if applicable
- 3) The power source hydraulic fluid temperature, if applicable
- 4) The ambient temperature and power source air inlet temperature

The following conditions shall be recorded once during the test for power sources driven by dedicated auxiliary internal combustion engines:

- 1) Altitude
- 2) Barometric pressure
- 3) Relative humidity

If the generator is driven by the chassis engine and the generator allows for operation at variable speeds, the chassis engine speed shall be reduced to the lowest rpm allowed for generator operation and the voltage and frequency shall be recorded.

The load shall be removed and the unloaded voltage and frequency shall be recorded.

Voltage shall be maintained within $\pm 10\%$ of the voltage stated on the power source specification label during the entire test. Frequency shall be maintained within ± 3 Hz of the frequency stated on the power source specification label during the entire test.

The total continuous electrical loads, excluding those loads associated with the equipment defined in NFPA 21.15.7.3.11.2, shall be applied during the testing unless an auxiliary engine drives the power source.

If the apparatus is equipped with a fire pump, the 2-hour certification test of the power source shall be completed with the fire pump pumping at 100% capacity at 150 psi (1000 kPa) net pump pressure. The test shall be permitted to be run concurrently with the pump certification test.

DOCUMENTATION

The results of each test shall be recorded on an appropriate form and provided with the delivery of the fire apparatus.

DIELECTRIC VOLTAGE WITHSTAND TEST

The line voltage wiring and permanently connected devices and equipment shall be subjected to a dielectric voltage withstand test of 900 volts for one (1) minute. The testing shall be performed after all body work has been completed.

The test shall be conducted as follows:

- 1) Isolate the power source from the panel board and disconnect any solid state low voltage components
- 2) Connect one lead of the dielectric tester to all the hot and neutral buses tied together
- 3) Connect the other lead to the fire apparatus frame or body
- 4) Close any switches and circuit breakers in the circuit(s)
- 5) Apply the dielectric voltage for one (1) minute in accordance with the testing equipment manufacturer's instructions

The electrical polarity of all permanently wired equipment, cord reels and receptacles shall be tested to verify that wiring connections have been properly made.

Electrical continuity shall be verified from the chassis or body to all line voltage electrical enclosures, light housings, motor housings, light poles, switch boxes and receptacle ground connections that are accessible to fire fighters in normal operations.

If the apparatus is equipped with a transfer switch, it shall be tested to verify operation and that all non grounded conductors are switched.

Electrical light towers, floodlights, motors, fixed appliances and portable generators shall be operated at their full rating or capacity for 30 minutes to ensure proper operation.

WARRANTY

A full statement shall be provided of the warranties for the vehicle(s) being bid. Warranties should clearly describe the terms under which the vehicle manufacturer accepts responsibility for the cost to repair defects caused by faulty design, quality of work or material and for the applicable period of time after delivery.

Cost of repairs refers to all costs related thereto including, but not limited to, the cost of materials and the cost of labor.

The Body Manufacturer shall warrant all materials and accessories used on the vehicle(s), whether fabricated by manufacturer or purchased from an outside source and will deal directly with the Riverside County Fire Department on all warranty work.

GENERAL LIMITED WARRANTY - TWO (2) YEARS

The vehicle shall be free of defects in material and workmanship for a period of two (2) years or 36,000 miles (or 57,936 kilometers), whichever occurs first starting thirty (30) days after the original invoice date.

The Contractor must be the "single source" coordinator of all warranties on the vehicle.

LOW VOLTAGE ELECTRICAL WARRANTY - FIVE (5) YEARS

The vehicle low voltage electrical system shall be free of defects in material and workmanship for a period of five (5) years or 60,000 miles (or 96,561 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

STRUCTURAL WARRANTY - TEN (10) YEARS

The body shall be free of structural or design failure or workmanship for a period of ten (10) years, or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

UNDERCOAT WARRANTY

The body undercoating shall have a warranty provided by the manufacturer for the lifetime of the vehicle or twenty (20) years, whichever occurs first. The warranty shall be transferable between vehicle owners. Should the undercoating material applied to the underside of the body and wheel wells of the vehicle ever flake off, peel, chip or crack due to drying out, the damaged area shall be re-sprayed without charge to the vehicle owner.

PAINT LIMITED WARRANTY - TEN (10) YEARS

The body shall be free of bubbling or peeling as a result of a defect in the method of manufacture for a period of ten (10) years or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date. **Pro-rated warranties will not be acceptable.**

GRAPHICS LIMITED WARRANTY

The 3M graphics installation shall be warranted for a period of two (2) years. The 3M materials installed on completed vehicle shall be warranted for seven (7) years. The 3M Diamond grade film (if specified) shall be warranted for ten (10) years.

CONSTRUCTION PERIOD

The completed vehicle shall be delivered within six hundred twenty (620) days after pre-construction meeting and receipt and approval of any signed change orders from Riverside County Fire Department.

Contractor shall not be held liable for delays of chassis delivery due to accidents, strikes, floods or other events not subject to their control. Contractor shall provide written notice to Riverside County Fire Department as to delays and to what extent these delays have in completing vehicle within the stated construction time period.

DEALER MAKE READY PERIOD

The completed vehicle shall be delivered after fourteen (14) days for dealer preparation after completed apparatus delivered to dealer location.

OVERALL HEIGHT REQUIREMENT

There is no overall height (OAH) restriction for this vehicle.

OVERALL LENGTH REQUIREMENT

There is no overall length (OAL) restriction for this vehicle.

ANGLE OF APPROACH

The angle of approach for this vehicle shall not be less than eight (8) degrees when it is loaded to the estimated in-service weight as specified by the current edition of NFPA 1900.

ANGLE OF DEPARTURE

The angle of departure for this vehicle shall not be less than eight (8) degrees when it is loaded to the estimated in-service weight as specified by the current edition of NFPA 1900.

CAB TO AXLE DIMENSION

Cab to axle will be **244.75"**.

CHASSIS MODIFICATIONS

LUBRICATION AND TIRE DATA PLATE

A permanent label in the driving compartment shall specify the quantity and type of the following fluids used in the vehicle and tire information:

- Engine oil
- Engine coolant
- Chassis transmission fluid
- Pump transmission lubrication fluid . . (if applicable)
- Pump priming system fluid, if applicable . . (if applicable)
- Drive axle(s) lubrication fluid
- Air conditioning refrigerant . . (if applicable)
- Air conditioning lubrication oil . . (if applicable)
- Power steering fluid
- Cab tilt mechanism fluid . . (if applicable)
- Transfer case fluid . . (if applicable)
- Equipment rack fluid (if applicable)
- CAFS air compressor system lubricant . . (if applicable)
- Generator system lubricant . . (if applicable)
- Front tire cold pressure
- Rear tire cold pressure
- Maximum tire speed ratings

VEHICLE DATA PLATE

A permanent label in the driving compartment which indicates the following:

- Filter part numbers for the;
 - Engine
 - Transmission
 - Air
 - Fuel
- Serial numbers for the;
 - Engine
 - Transmission
- Delivered Weights of the Front and Rear Axles
- Paint Brand and Code(s)
- Sales Order Number

OVERALL HEIGHT, LENGTH DATA PLATE (US)

The fire apparatus manufacturer shall permanently affix a high-visibility label in a location visible to the driver while seated.

The label shall show the height of the completed unequipped vehicle in feet and inches (meters), the length of the completed vehicle in feet and inches (meters to nearest 1/10th), and the GVWR in tons (metric tons).

Wording on the label shall indicate that; "The information shown was current when the apparatus was manufactured. If the overall height changes while the vehicle is in service, the fire department must revise that dimension on the plate".

PERSONNEL CAPACITY

A label that states the number of personnel the vehicle is designed to carry shall be located in an area visible to the driver.

SEAT BELT WARNING - FAMA06/07

A safety sign FAMA06 shall be visible from each seat that is not equipped with occupant restraint and therefore not intended to be occupied while the vehicle is in motion.

A safety sign FAMA07, which warns of the importance of seat belt use, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

EQUIPMENT MOUNTING FAMA10

A safety sign FAMA10, which warns of the need to secure items in the cab, shall be visible inside the cab.

FIRE SERVICE TIRES - FAMA12

A safety sign FAMA12, which warns of the special requirements for fire service-rated tires, shall be visible to the driver entering the cab of any apparatus so equipped.

HELMET WARNING - FAMA15

A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

CLIMBING METHOD - FAMA23

A safety sign FAMA23, which warns of the proper climbing method, shall be visible to personnel entering the cab and at each designated climbing location on the body.

REAR STEP CROSSWALK WARNING - FAMA24

A safety sign FAMA24, which warns personnel not to ride on the vehicle, shall be located at the rear step areas and at any cross walkways.

FINAL STAGE MANUFACTURER VEHICLE CERTIFICATION

A final stage manufacturer vehicle certification label shall be provided and installed in the driver cab door jamb area.

SAE Labels

All labels shall use SAE units, including inches (in) and feet (ft) for dimensions, pounds (lbs) for weight, gallons (gal) for volume, and pounds per square inch (psi) for pressure. All labels shall use dual units, with dimensions including both inches (in) and meters (m), weight in both pounds (lbs) and kilograms (kg), volume in both gallons (gal) and liters (L), and pressure in both pounds per square inch (psi) and kilopascals (kPa).

OEM FRONT BUMPER REPLACEMENT

The standard OEM bumper shall be removed and replaced with a custom bumper design. A 2" x 2" x 1/4" welded steel tubing framework shall be bolted to the OEM bumper mount location extending bumper 28". The framework is designed as an under slung "L" shape to allow for a deeper compartment storage above.

An SVI Edge contoured one-piece, fully welded steel construction front bumper shall be bolted in place of the OEM bumper. The front bumper {will/shall} be fabricated from formed 7 gauge steel and welded to create contoured edges for an aesthetically pleasing design and improved front approach angle. Two (2) 3/4" steel tow eyes shall be provided on front with 2" opening. Bumper painted finish shall match lower cab paint color.

The top of the 28" extension shall be enclosed with 3/16" NFPA compliant aluminum treadplate. A large compartment shall be recessed into extension, 75" wide x 18" front-back, x 10" deep formed from 3/16" smooth aluminum. Additional options added ie: winch, air horns, recessed siren or speakers, make take away from compartment dimensions.

A 5" high single lid shall cover compartment fabricated from 1/8" aluminum tread plate with stainless steel hinges, chrome lift handle, and two (2) gas shock type hold open devices, one (1) at each end. A "Not a Step" label shall be provide on outer lid surface.

- Mount(s) shall be provided and installed for two (2) Riverside County Fire Department supplied ram(s).

Rams will be Qty (1) PTR40 & Qty (1) PTR50

- Mounts will be supplied and installed for one (1) Riverside County Fire Department supplied cutter(s).

Cutter will be Qty (1) PCU60

- Mounts will be supplied and installed for one (1) Riverside County Fire Department supplied spreader(s).

Spreader will be Qty (1) PSP60

120/240 VAC OUTLETS AND CIRCUITS

The generator and or shore power shall supply the 120/240 volt electrical equipment and outlets outlined below. Proper circuit protection shall be installed as noted:

- **One (1) 120 volt duplex outlet located inside of the front bumper compartment.**
 - The **duplex** outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
 - Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.

AIR HORN

One (1) Grover 24" Stuttertone chrome plated air horn shall be recessed mounted in the front bumper on the curbside side. An emergency air shut off valve shall be provided in the cab.

Locate outboard of Siren Speaker

AIR HORN ACTIVATION

Air horn(s) activation if specified shall be supplied by the cab/chassis manufacturer.

MOTOR DRIVEN SIREN

The chassis supplied motor driven rotary siren if specified shall be recessed mounted in the extended front bumper. The siren shall be wired through the master warning light switch, and properly wired with heavy copper cable for minimum voltage drop.

Spartan Motors supplied Q-Siren Guards will be installed by SVI

The siren shall be located on the streetside of the front bumper.

There shall be a siren brake installed in the rocker switch control panel to activate the siren brake.

SIREN ACTIVATION

The siren activation shall be provided by cab/chassis manufacturer

BUMPER GROUND LIGHTS

GROUND LIGHTS

There shall be two (2) OnScene 10" Access Pro white LED lights installed below bumper capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting shall be switchable but activated automatically when the vehicle park brake is set.

FRONT BUMPER

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with a black hammertone powder coat paint finish located at the front bumper for use with removable rope anchor point and/or a portable electric winch (if specified).
- A steel 5/8" x 3" hitch pin shall be provided with each receiver tube.
 - There shall be one (1) 12 VDC plug(s) with quick connect provided to power a Warn portable winch. All 12 VDC cables to be sized according to Warn and installation for intended use.
 - The receiver(s) shall have one (1) rubber cover(s) provided.

FRONT BUMPER RECIEVER, SIDES

There shall be two (2) 2" x 2" x 1/4" wall steel receiver tube(s) with black hammertone powder coat paint finish located, one (1) on streetside, and one (1) on curbside of front bumper extension for use with removable rope anchor and/or a portable electric winch (when specified).

- A steel 5/8" x 3" hitch pin shall be provided with each receiver tube.
 - The receiver(s) shall have two (2) rubber cover(s) provided.

ELECTRONIC SIREN

One (1) Federal PA300-012MSC, 200 watt electronic siren with standard microphone shall be provided and installed in cab within easy reach of Driver. Siren power shall be wired through the master warning light switch.

- There shall be one (1) communications radio and/or siren 3" recess mount(s) with black powdercoat paint finish in specified console.

The specified siren functions shall be controlled by siren mounted switches.

VIBRATING TONES SOUND DEVICE SYSTEM

Two (2) Federal Rumbler vibrating tones sound device shall be provided. Rumbler shall be connected to specified primary electronic siren amplifier. Siren power shall be wired through the master warning light switch. The speakers for system shall be mounted under front of vehicle and protected from weather or road damage.

RUMBLER SIREN ACTIVATION

The Rumbler Sirens shall be activated by a switch in the Vista.

SIREN SPEAKER

One (1) Federal BP200-EF, 200 watt siren speaker shall be provided and recess mounted behind the front bumper.

The siren speaker shall be located on the curbside of front bumper.

Locate outboard of frame rail curbside.

AIR INTAKE SYSTEM

An air filter shall be provided in the engine's air intake system by the customer cab/chassis manufacturer.

Air inlet restrictions shall not exceed the engine manufacturer's recommendations.

The air inlet shall be equipped with a means of separating water and burning embers from the air intake system.

This requirement shall be permitted to be achieved by either of the following methods:

1. Provision of a device such that burning particulate matter larger than 0.039 in. (1.0 mm) in diameter cannot reach the air filter element.
2. Provision of a multi screen ember separator capable of meeting the test requirements defined in the Parker Hannafin, Racor Division, publication LF 1093-90, *Ember Separation Test Procedure*, or an equivalent test.

EXHAUST DIVERTER

An exhaust diverter valve shall be located in-line of exhaust tubing and controlled from driver's position to re-route exhaust discharge. Exhaust diverter valve shall be constructed from 14 gauge stainless steel material with air actuated control.

As a default, the exhaust shall always discharge to curbside just ahead of rear wheels, and when selected the exhaust shall discharge to a vertical exhaust pipe, extending above the body height 12".

The exhaust piping and discharge outlet shall be located or shielded so as not to expose any portion of the apparatus or equipment to excessive heating.

Exhaust pipe discharge shall be directed away from any operator's position.

Where parts of the exhaust system are exposed so that they are likely to cause injury to operating personnel, protective guards shall be provided.

- Exhaust Diverter shall be controlled by a momentary rocker switch with red actuator and red Indicator. Rocker Switch will be located in the center console/dash panel and shall be labeled "EXHAUST DIVERTER".
- The tail pipe(s) shall terminate in a standard straight cut pipe.
- The tail pipe(s) shall terminate parallel to rear axle and flush with body.

CAB WARNING LIGHT PACKAGE

ZONE A - FRONT WARNING LIGHTS, UPPER

The light bar shall be supplied and installed by the cab/chassis manufacturer.

The lightbar(s) shall be separately controlled at switch panel in the cab.

GTT OPTICOM

A GTT Opticom model **792 strobe style** light with built-in power supply shall be provided as a stand alone unit (outside of light bar).

No Infrared

Opticom shall be located in the Driver Side location of Lightbar. Refer to photo in folder.

- Opticom shall be controlled by a virtual switch, labeled "OPTICOM", and interlocked with the parking brake (transmission park position) same as other clear warning.

ZONE A - FRONT WARNING LIGHTS, LOWER

The front lower warning lights shall be supplied and installed by the cab/chassis manufacturer. They shall be Federal lights to complete an NFPA compliant lower level warning light system.

The Lights shall be controlled at the Switch Panel in Cab.

ZONES B AND D - CAB INTERSECTOR LIGHT **(CAB FRONT BUMPER CORNER/EDGE)**

There shall be two (2) Federal Signal QL64 LED Light(s) provided, one (1) each side. The light head shall include twenty-six (26) programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

- Clear Lens

Clear warning lights shall be deactivated when vehicle is in Blocking Mode (Parking Brake Set and/or Transmission in Park).

Front Bumper Intersection Lights

- Red Above/White Below

Each light shall have a chrome flange.

- Flash Pattern shall be Federal Signal DoubleFlash 150 - Simultaneous

The lights shall be controlled at the multiplex display(s) in the cab.

ZONES B AND D - CAB AUXILIARY LIGHT

Federal Signal cornering lights to be located above the front bumper intersection lights. Cornering lights to activate with respective turn signal and in reverse.

There shall be two (2) Federal Signal Micropulse12 LED Light(s) provided, one (1) each side.

Each Light shall have:

- **White LEDs**
- **Clear Lens**

Shall be Cornering Lights Mounted Above the Zone B D Quadraflares.

Cornering lights to activate with respective turn signal and in reverse.

Each light shall have a chrome flange.

The lights shall be controlled at the multiplex display(s) in the cab.

CAB HAZARD WARNING LIGHT - EXHAUST DIVERTER

A Truck-Lite amber LED flashing light shall be provided and located in the driving compartment and be illuminated automatically whenever the vehicles exhaust diverter is active

The hazard light shall be labeled; "Do not move apparatus when light is on."

An audible alarm shall be provided for the door ajar light.

FIVE (5) POSITION ANTENNA RAIL

One (1) radio antenna rail(s) shall be provided and installed on roof of vehicle. Each rail be constructed of aluminum, forming a two piece box design. The top section shall be removable for easy access to the individual antenna wiring. Each base shall include enough cable to reach radio location plus a service loop of at least 10' of LMR195 flexible communications cable. The antenna wiring shall enter the vehicle roof at a single point under the end of the rail.

Antenna #1 mounted on specified antenna rail.

Due to multiple configurations of antenna whips, the Body Manufacturer shall provide the antenna base, and Riverside County Fire Department shall provide the whip.

The end of antenna cable shall be routed to under officer seat. Cable shall be labeled.

Antenna #2 mounted and installed on specified antenna rail.

Due to multiple configurations of antenna whips, the Body Manufacturer shall provide the antenna base, and Riverside County Fire Department shall provide the whip.

The end of antenna cable shall be routed to under officer seat. Cable shall be labeled..

Antenna #3 mounted and installed on specified antenna rail.

Due to multiple configurations of antenna whips, the Body Manufacturer shall provide the antenna base, and Riverside County Fire Department shall provide the whip.

The end of antenna cable shall be routed to under officer seat. Cable shall be labeled.

Antenna #4 mounted and installed on specified antenna rail.

Due to multiple configurations of antenna whips, the Body Manufacturer shall provide the antenna base, and Riverside County Fire Department shall provide the whip.

The end of antenna cable shall be routed to under officer seat. Cable shall be labeled..

Antenna #5 mounted and installed on specified antenna rail.

Due to multiple configurations of antenna whips, the Body Manufacturer shall provide the antenna base, and Riverside County Fire Department shall provide the whip.

The end of antenna cable shall be routed to under officer seat. Cable shall be labeled..

Antenna rail will be painted to match the exterior color of the chassis.

Job Color Red

Cab roof mounted antenna rail shall be located on forward upper roof section.

SEAT BELT COLOR

Section 11.1.3.3 of the NFPA 1900 Standards, requires all seat belt webbing in cab to be bright red or bright orange in color, and section 11.1.3.4 the buckle portion of the seat belt shall be mounted on a rigid or semi rigid stalk such that the buckle remains positioned in an accessible location.

SEAT BELT WEB LENGTH - CUSTOM CAB

Sections 11.1.3.1 and 11.1.3.2 of the NFPA 1900 standards, require the effective seat belt web length for a Type 1 lap belt for pelvic restraint to be a minimum of 60", and a Type 2 pelvic and upper torso restraint-style seat belt assembly to be a minimum of 110".

The chassis seat belt web length as supplied by the custom chassis manufacturer shall be compliant to NFPA Standards 11.1.3.1 and 11.1.3.2.

SEAT BELT / VDR SYSTEM - CUSTOM CAB

Section 11.1.3.8 A seat belt warning system shall be provided on the apparatus. The seat belt warning systems shall be provided by the cab/chassis manufacturer.

TIRE PRESSURE MONITOR SCREEN INSTALLATION

The Cab/Chassis supplied Tire Pressure Monitor Screen shall be installed. Location for mounting will be determined at the mid-inspection.

HELMET STORAGE

HELMET STORAGE, DRIVER POSITION

Helmet storage shall be the responsibility of Riverside County Fire Department in specified cab area.

A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

HELMET STORAGE, OFFICER POSITION

Helmet storage shall be the responsibility of Riverside County Fire Department in specified cab area.

A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

CAB CRASH TEST CERTIFICATION

A cab crash test certification from the fire apparatus manufacturer shall be provided with the equipment. A copy of this certification shall be included with the bid.

NOTE: There shall be no exception to any portion of the cab integrity certification requirements. Nonconformance shall lead to immediate rejection of bid.

The certification shall state that the cab does meet or exceed the requirements below:

- 1) European Occupant Protection Standard ECE Regulation No. 29.
- 2) SAE J2422 Cab Roof Strength Evaluation - Quasi-Static Loading Heavy Trucks.

CAB PAINT

The finish paint and color as provided from the cab/chassis manufacturer shall be provided. Cab shall not be repainted.

(Note: Most departments do NOT find that the fleet paint finish from a commercial cab/chassis manufacturer is acceptable. The Body Builder will NOT be responsible for paint quality and finish issues.)

CAB INTERIOR COMPONENT PAINT COLOR, OEM SUPPLIED

Powder coat shall be **matte black**.

HUB AND NUT COVERS

If specified chassis supplied front and rear wheels hub caps and wheel nut covers shall be installed prior to delivery of completed unit.

MUDFLAPS

There shall be 1/4" rubber mudflaps with logo provided and installed behind rear axle tires to prevent throwing road debris and lower road spray.

AIR BRAKE SYSTEM QUICK BUILD-UP

The air brake quick build-up system shall be supplied from the cab/chassis manufacturer.

The quick buildup system shall provide sufficient air pressure so that the apparatus has no brake drag and is able to stop under the intended operating conditions following the 60-second buildup time.

CHASSIS AIR TANK VALVES

The cab/chassis air brake system tank drains shall be extended to Class 1 brass petcock valves with chrome plated zinc handle located on forward streetside lower body or as per tank locations. Each air tank and valve shall be inter-piped with black reinforced nylon tubing. Brass compression type fittings shall be used on the nylon tubing, meeting all DOT requirements.

Each handle shall be properly labeled to identify each tank.



ROAD EMERGENCY SAFETY KIT

The DOT required reflective triangles, warning flares, and fire extinguisher shall be provided by cab and chassis supplier.

SIGTRONICS INTERCOM SYSTEM

The following Sigtronics intercom system shall be provided and installed to improve the safety of firefighters and rescue professionals through enhanced communication and hearing protection. System shall have the following major components as minimum;

- Intercom Station, US-67S

Sigtronics Emergency Radio Switcher SRS-6

- **The Emergency Radio Switcher allows AM / FM radio to be heard whenever intercom and / or mobile radio communications are not occurring.**
- **Our Radio Switcher is great for monitoring traffic and weather reports.**
- **AM / FM radio will not be heard over mobile radio, it will automatically be muted when communications occur.**

Warranty: Two years parts and labor.

- Radio interface for single radio.

INTERCOM SYSTEM INSTALLATION


The above listed intercom system headset jacks shall be installed in the cab locations as follows;

- Driver's – Intercom & radio PTT provided at driver position.
 - Position provided with under helmet headset model **SE-8RVC Flex Boom**
 - Intercom headset jack shall be located overhead right shoulder.
 - Push-to-Talk switch shall be located on cab dash.
- Officer's – Intercom & radio PTT provided at officer position.
 - Position provided with under helmet headset model **SE-8RVC Flex Boom**
 - Intercom headset jack shall be located overhead left shoulder.
 - Push-to-Talk switch shall be located on cab dash.
 - Headset hook provided overhead left shoulder.
- Crew, Forward Facing – (4) Intercom provided at forward facing crew position.
 - Position provided with under helmet headset model **SE-8RVC**
 - Headset hook provided on interior rear wall.

FRONT CAB INTERIOR COMPONENTS

MAP BOX


A map box shall be provided on engine cover of the cab between driver and officer. **Will match provided photo. Adding additional USB's and 12V plugs to each side of ones on the dash.**

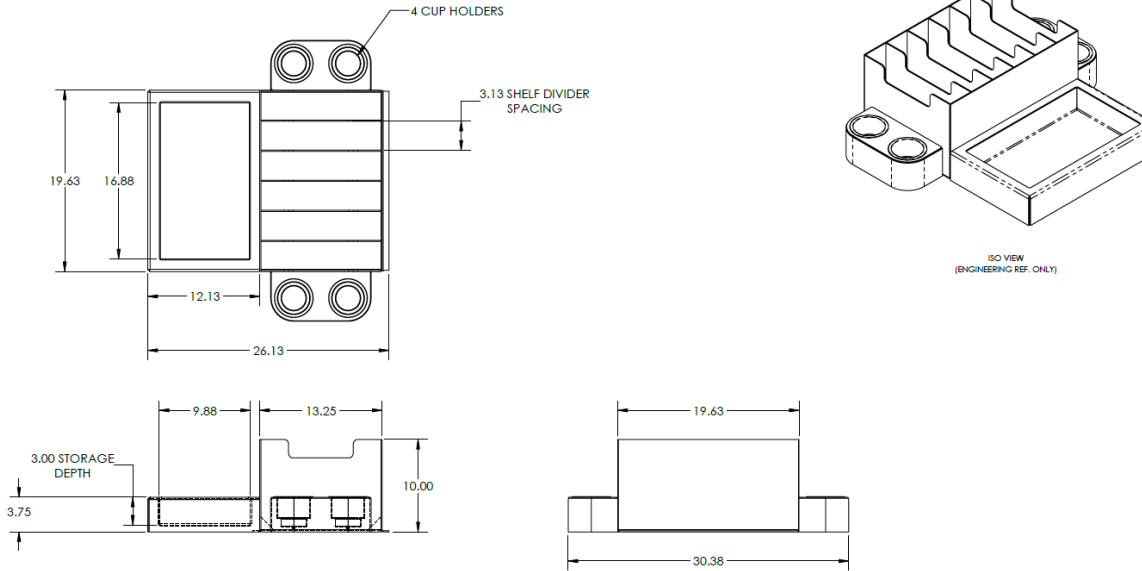

Map box shall be provided with open top.

There shall be two (2) 12 VDC power plug(s) provided in dash as shown below..

There shall be two (2) Blue Sea 12 VDC USB dual port(s) provided in dash as shown below. **Adding additional USB's and 12V plugs to each side of ones on the dash.**

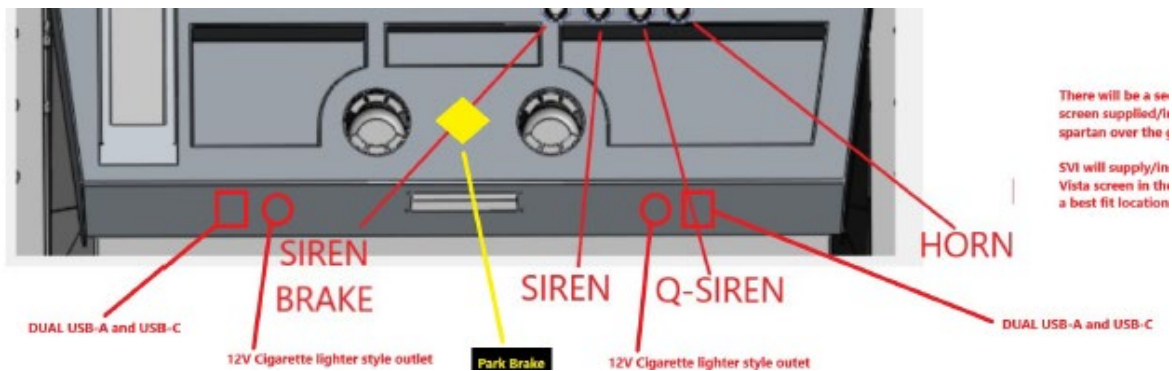

Dual USB charging ports come with one USB-C port and one USB-A port.

There will/ shall be a officerside foot step install as shown in provided picture.



REAR CAB COMPONENT LAYOUT

The following components shall be provided in the rear area of cab, final layout to be determined at pre-construction meeting.

REAR CAB DESK - STRAIGHT

The rear portion of the cab shall be provided with a desktop which shall be approximately **26" deep x "width of the Engine Tunnel"** and located approximately 30" from floor. The desk top surface shall be fabricated of 3/16" smooth finish aluminum.

There shall be 2-1/2" diameter holes with plastic edge grommet provided at each rear corner for wiring of future equipment located on the desk top.

The desk shall have a lift up desk top for misc item storage.

DESKTOP COMPONENT CONSOLE

There shall be a two (2) console(s) at top rear of the desk for optional component mounting. The console(s) shall be fabricated from 1/8" aluminum approximately 6" high x 9" deep with a 6" sloping component mounting face.

The sloped component mounting surface shall be a one-piece cover to allow access to optional components, and wiring and held closed with fastener in each corner.

- There shall be one (1) 120 VAC, 20 amp, duplex straight-blade receptacle (NEMA 5-20R) outlet(s) provided in specified console.
 - Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.

CAB, CAB DESK, CABINET - VDC COMPONENTS

- One (1) 12 VDC cigarette style power port(s) shall be provided in cabinet with dust cover.
- Power port shall be wired to the master battery switch.
- Power port shall be located in the top left interior corner.
- One (1) 12 VDC USB dual charger port(s) shall be provided in cabinet with dust cover. Dual USB charging ports come with one USB-C port and one USB-A port.
- Power port shall be wired to the master battery switch.
- Power port shall be located in the top left interior corner.

Located on floor rear facing streetside position shall be;

There shall be one (1) storage cabinet located in rear cab area. The cabinet shall be fabricated from 1/8" smooth aluminum.

The cabinet shall be approximately 23" wide x **40"** high x 21" deep. If cab is specified with air bags, the interior cabinet(s) will be mounted clear of the deployment area.

- Cargo netting of 1" - 2" nylon webbing shall be provided over cabinet opening with automotive seatbelt style latches.
- The compartment light(s) shall be controlled by a latching, black rocker switch with amber indicator light. The switch shall be labeled as "COMPARTMENT LIGHTS" with a black and chrome label bezel.
- There shall be one (1) OnScene Solutions 28" Access PRO LED light(s) mounted inside the cabinet.
- Cabinet(s) shall be provided with vertically mounted shallow aluminum Shelf-Trac for specified component installation.
- There shall be one (1) adjustable shelf/shelves in the above cabinet(s). Each shelf shall have a 1.25" vertical lip at front to contain items while vehicle is in motion.

Located on floor rear facing curbside position shall be:

There shall be one (1) storage cabinet located in rear cab area. The cabinet shall be fabricated from 1/8" smooth aluminum.

The cabinet shall be approximately 23" wide x 40" high x 21" deep. If cab is specified with air bags, the interior cabinet(s) will be mounted clear of the deployment area.

- Cargo netting of 1" - 2" nylon webbing shall be provided over cabinet opening with automotive seatbelt style latches.
- The compartment light(s) shall be controlled by a latching, black rocker switch with amber indicator light. The switch shall be labeled as "COMPARTMENT LIGHTS" with a black and chrome label bezel.
- There shall be one (1) OnScene Solutions 28" Access PRO LED light(s) mounted inside the cabinet.
- Cabinet(s) shall be provided with vertically mounted shallow aluminum Shelf-Trac for specified component installation.
- There shall be one (1) adjustable shelf/shelves in the above cabinet(s). Each shelf shall have a 1.25" vertical lip at front to contain items while vehicle is in motion.

STREETSIDE FUEL FILL

There shall be one (1) fuel fill door located in the streetside exterior wheel well panel, behind the rear axle. The fill door shall be fabricated from brushed stainless steel. There shall be a permanent label with the text "DIESEL FUEL ONLY" located adjacent to the fuel fill access.

CURBSIDE FUEL FILL

There shall be one (1) fuel fill door located in the curbside exterior wheel well panel, behind the rear axle. The fill door shall be fabricated from brushed stainless steel. There shall be a permanent label with the text "DIESEL FUEL ONLY" located adjacent to the fuel fill access.

DEF FLUID FILL

The DEF fluid fill shall be as supplied by commercial cab/chassis manufacturer.

BODY DESIGN

The importance of public safety associated with emergency vehicles requires that the construction of this vehicle meet the following specifications. These specifications are written to establish the minimum level of quality and design. All Bidders shall be required to meet these minimum requirements.

It is the intent of these specifications to fully describe the requirements for a custom built emergency type vehicle. In order to extend the expected service life of this vehicle, the body module shall be removable from the chassis frame and be capable of being installed on a new chassis.

The sheet metal material requirements, including alloy and material thickness, throughout the specifications are considered to be a minimum. Since such materials are available to all Manufacturers, the material specifications shall be strictly adhered to.

The fabrication of the body shall be formed sheet metal. Formed components shall allow the Riverside County Fire Department to have the body repaired locally in the case where any object has struck the body and caused damage. The use of proprietary extrusions will prevent the Riverside County Fire Department from such repair and shall NOT be used. All fabricated body components to be cut by a laser or water-jet for superior cut edge quality.

Following construction of the subframe, which supports the apparatus body, the sheet metal portion of the body shall be built directly on the subframe. The joining of the subframe and body shall be of a welded integral construction.

The sheet metal fabrication of the body shall be performed using inert gas continuous feed welders only. The entire body shall be welded construction. The use of pop rivets in any portion of structural construction may allow premature failure of the body structure. Therefore, pop rivets shall NOT be used in the construction of the structural portions of the body. This includes side body sheets, inner panels of compartment doors, and any other structural portions of the body.

CAB TO AXLE DIMENSION

Cab to axle will be 190.75".

EXTERIOR ALUMINUM BODY

The fabrication of the body shall be constructed from aluminum 3003H-14 alloy smooth plate. This shall include compartment front panel, vertical side sheets, side upper rollover panels, rear panels and compartment door frames.

The body compartment floors and exterior panels shall be constructed with not less than 3/16" (.187) aluminum 3003H-14 smooth plate. Interior compartment dividing walls shall be constructed with not less than 1/8" (.125) aluminum 3003H-14 smooth plate. Lighter gauge sheet metal will not be acceptable in these areas.

The door side frame openings shall be formed "C" channel design. An electrical wiring conduit raceway running the full length of exterior compartments shall be provided. This raceway shall contain all 12 volt wiring running to the rear of the apparatus, permitting easy accessibility to wiring.

Individual compartment modules, with dead air space voids between compartments, shall not be an acceptable method of compartment construction.

The compartments shall be an integral part of the body construction. Compartment floors from front of body to ahead of rear axle, also from rear axle to rear of body shall be single one-piece sections. Compartment floors shall be preformed, then positioned in body and welded into final position.

Compartment floors shall have a "sweep-out" design with door opening threshold positioned lower than compartment floor, permitting easy cleaning of compartments. Angles, lips, or door moldings are not acceptable in the base of compartment door opening. One-way rubber drain valves shall be provided in compartment floors so that a water hose may be used to flush-out compartment area.

All exterior seams in sheet metal below frame, and around the rear wheel well area shall be welded and caulked to resist moisture from entering the compartments. All other interior seams and corners shall be sealed with silicone based caulk prior to painting.

Only stainless steel bolts, nuts, sheet metal screws and/or aluminum screws shall be used in mounting exterior trim, hardware and equipment.

Exterior compartments shall have louvers in lower back wall of compartment for ventilation.

WALKWAY/ROOF COMPARTMENT SUPPORT

The upper body floor structure shall be integral with the body sheet metal construction and shall be an all welded assembly. Bolted or glued assemblies shall not be accepted, .

All seams in roof material shall be fully and continuously welded to resist entry of moisture.

There shall be a total of four (4) 2" x 2" x 1/4" 6061-T6 alloy aluminum "C" channels running the length of body, two (2) on each outboard side. These "C" channels shall be used for roof support and in addition shall be used for mounting of any specified reels. This open "C" channel design along with special reel mounting clips allows for a universal location of any specified reels within each compartment.

In between the two (2) center "C" channels running the length of body shall be 2" x 2" x 1/4" 6061-T6 alloy aluminum tubing running perpendicular to walkway and welded in place on approximate 16" centers to support roof and/or walkway structure specified. Spacing greater than 16" that can allow oil canning of walkway shall not be allowed, .

A 2" formed radius shall be provided along the body sides and utilized as a wiring trough. The use of aluminum extrusions in this area shall not be acceptable, .

BODY SUBFRAME

The chassis frame rails shall be fitted with 1/4" custom extruded UHMW polyethylene rail cap to isolate the body frame members from direct contact with chassis frame rails.

The body subframe shall be constructed from 6061T6 aluminum alloy tubing. Subframe shall consist of two (2) 2" x 6" x 1/4" aluminum tubes, the same width as the chassis frame rails, NO EXCEPTION. Welded to this tubing shall be cross members of 2" x 6" x 1/4" aluminum. These cross members shall extend the full width of the body to support the compartments. Cross members shall be located at front and rear of the body, below compartment divider walls, and in front and rear of wheel well opening. Additional aluminum cross members shall be located on 16" centers, or as necessary to support walkway or heavy equipment.

To form the frame, the tubing shall be beveled and welded at each joint using 5356 aluminum alloy welding wire.

BODY MOUNTING

The body subframe shall be fastened to the chassis frame with six (6) spring loaded body mounts. Each mount shall be configured using a two-piece encapsulated slide bracket. The two (2) brackets shall be fabricated of heavy duty 1/4" thick steel and shall have a powder coat finish to resist any corrosion. Each mounting assembly shall utilize two (2) 3/4" diameter x 6" long grade 8 bolts and two (2) heavy duty springs. The assembly design shall allow the body and subframe to act as one (1) component, separate from the chassis. As the chassis frame twists under driving conditions, the spring mounting system shall eliminate any stress from being transferred into the body. The spring loaded body mounts shall also prevent frame side rail or body damage caused by unevenly distributed stress and strains due to load and chassis movement.

Body mountings that do not allow relief from chassis movement will not be acceptable.

12" REAR STEP BUMPER

The full width rear bumper shall be constructed from 2" x 2" x 1/4" aluminum tubing frame and covered with 3/16" NFPA compliant aluminum tread plate. The bumper shall extend from the rear vertical body panel 12" and provide a rear step with a minimum of 1/2" space at body for water drainage.

REAR BUMPER STORAGE BOX - STREETSIDE

A storage box shall be provided on rear bumper streetside with hinged lift-up door provided with rubber style "T" latch and gas shock to hold door in open position. Storage boxes shall be fabricated of aluminum tread plate.

REAR BUMPER STORAGE BOX - CURBSIDE

A storage box shall be provided on rear bumper curbside with hinged lift-up door provided with rubber style "T" latch and gas shock to hold door in open position. Storage boxes shall be fabricated of aluminum tread plate.

REAR TOW EYES

There shall be two (2) heavy duty rear mounted tow eyes securely attached to the body subframe, below body. The tow eyes shall be fabricated from 3/4" thick steel plate with a 3" diameter opening. Tow eyes shall have a black powder coat finish.

GROUND LIGHTS

There shall be two (2) OnScene 10" Access Pro white LED lights installed below bumper capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting shall be switchable but activated automatically when the vehicle park brake is set.

WHEEL WELL EXTERIOR PANEL

The exterior panel of the body wheel well enclosure shall be constructed from 3/16" smooth aluminum panels.

STAINLESS STEEL BODY FENDERETTES

The body wheel well openings shall be provided with round radius, polished stainless steel fenderettes. The fenderettes shall be bolted and easily replaceable if damaged. The fenderettes shall be installed using nylon washers to space them slightly away from the body to reduce buildup of moisture and/or debris.

WHEEL WELL LINERS

The wheel wells shall be provided with an easily removable polymer, circular inner fender liner. The inner liner shall be bolted to the wheel well with stainless steel bolts and spaced away from the wheel well so the liner will not accumulate dirt or water.

WHEEL WELL STEP

Between the tandem rear tires (one each side) shall be a heavy duty fabricated single foot step to assist in access to wheel well compartments. Step surface to be fabricated of non-slip aluminum grating with structure to body sub-frame that resist flexing or bending under the weight of single person.

There shall be a 24" vertical handrail each side of body between wheel well compartments. Handrail shall be NFPA compliant 1-1/4" knurled 304 stainless steel with welded end stanchions.

SCBA CYLINDER COMPARTMENTS

There shall be **four (4)** SCBA cylinder storage compartments located, **two (2) on curbside**, and two (2) on streetside of rear tandem wheel well area.

The **outer compartments ahead of the forward rear wheel** shall have a stainless steel door assembly with a positive catch latch. Each compartment shall allow the storage of one (1) SCBA cylinder or a fire extinguisher up to 8" in diameter x 22" deep.

The center compartments (between tandems axles) shall have a **drop-down stainless steel door** with a positive catch latch and stainless steel hinge. This compartment shall allow for the storage of three (3) SCBA cylinders or a fire extinguishers up to 8" in diameter x 22" deep.

The doors shall activate the "Hazard Warning Light" in the cab when not in the closed position.

BODY PAINT SPECIFICATIONS

BODY PAINT PREPARATION

After the body and components have been fabricated they shall be disassembled so when vehicle is complete there shall be finish paint beneath the removable components. The body shall be removed from chassis during the paint process to insure proper paint coverage. The body and components shall be metal finished as follows to provide a superior substrate for painting.

The exterior (and interior, if painted) body shall undergo a thorough cleaning process starting with a biodegradable phosphoric acid solution to begin the etching process followed by a complete clear water rinse. The next step shall consist of a chemical conversion coating applied to seal the metal substrate and become part of the metal surface for greater film adhesion.

All bright metal fittings, if unavailable in stainless steel or polished aluminum, shall be chrome plated. Iron fittings shall be copper under plated prior to chrome plating.

PAINT PROCESS

The paint process shall follow the strict standards set forth by PPG Industries guidelines. Painters applying PPG products will be PPG Certified Commercial Technicians, and re-certified every two (2) years. The body shall go through the following paint process;

- 1) Clean bare metal with a wax and grease remover using low lint rags.
- 2) Inspect, straighten, and hammer high points, grind all seams, sharp edges, and welds. DA sand entire paintable surfaces using 24-180 grit dry paper. Plastic fill all low spots and DA sand fill areas using 36-180 grit dry paper. Apply pinhole filler and DA sand areas using 80-180 grit dry paper.
- 3) Re-clean bare metal using a wax and grease remover and low lint rags.
- 4) Within 24 hours, a PPG Delfleet® epoxy color primer with proper hardener for corrosion resistance using a pressure pot spray gun and applying 2-5 full wet coats or 1.5-8.0 dry mils max. achieving full hiding and allow to air dry 60 minutes @ 70°F or bake for 45 minutes @ 140°F degree.
- 5) Inspect, putty fill, and dry guild coat entire body surface and DA sand using 180-400 grit dry paper.
- 6) Re-clean bare metal using a wax and grease remover using low lint rags.
- 7) A PPG Delfleet® primer sealer with proper hardener and thinner shall be sprayed using a pressure pot spray gun and applying 1 full wet coat or 1.0-2.0 dry mils achieving full hiding and allow to flash off in spray booth for minimum of 60 minutes @ 70°F.
- 8) A PPG Delfleet® FBCH basecoat (color) with proper hardener and dry additive shall then be sprayed using a pressure pot set @ 45-60 PSI and achieving full hiding or 1.5-2.0 wet mils and allow to flash off in spray booth 45-60 minutes before applying clearcoat.
- 9) A PPG Delfleet® clearcoat with proper hardener and thinner shall be sprayed using a pressure pot spray gun and applying 2-3 full wet coats or 5.0 wet mils for a uniform gloss and allow to flash off in spray booth 10 minutes and bake for 120-140 minutes @ 125°F (surface temp.).
- 10) After cooling, DA sand heavy orange peel or runs using 1000 grit dry sand paper and final DA sand using 1500-2000 grit dry sand paper. Wipe off all surfaces to remove dust and debris. Buff unit as needed using 3M rubbing compound and a white wool pad and inspect until all sand scratches are removed.
- 11) Polish as needed using 3M Perfect-It-Polish and a black foam pad, repeat as necessary and inspect until all sand scratches are removed.

PAINT - ENVIRONMENTAL IMPACT

The contractor shall meet or exceed their current State regulations concerning paint operations pollution control and shall include measures to protect the atmosphere, water and soil. PPG Delfleet® Evolution paint shall be free of all heavy metal (lead & chromate) components. Paint emissions from sanding and painting shall be filtered and collected. All paint wastes shall be disposed of in an environmentally safe manner. Solvents used in cleanup operations shall be collected, sent off-site for distillation and returned for reuse.

FASTENERS

Prior to the assembly and reinstallation of exterior components; i.e. warning and DOT lights, handrails, steps, door hardware, and miscellaneous items, a Mylar isolation tape, or gasket shall be used to prevent damage to the finish painted surface. These components shall be fastened to body using either a plastic insert into body metal with stainless steel screws or zinc coated nut-surts into body surface using stainless steel bolts to resist corrosion from dissimilar metals.

ELECTROLYSIS CORROSION CONTROL

The vehicle shall be assembled using ECK brand or similar corrosion control compound on all high corrosion potential areas.

ECK protects aluminum and stainless steel against electrolytic reaction, isolates dissimilar metals and gives bedding protection for hardware and fasteners. ECK contains anti-seizing lubricant for threads. ECK is dielectric and perfect for use with electrical connectors.

PAINT FINISH - SINGLE COLOR

The body shall be painted with a single color of PPG Delfleet® Evolution per Riverside County Fire Department approved paint spray out provided.

- Paint Color: Match cab/chassis supplied paint color.

BODY UNDERCOATING

The entire underside of body shall be sprayed with black automotive undercoating. Undercoating shall cover all areas underside of body and wheel well area to help resist corrosion under the vehicle.

COMPARTMENT INTERIOR FINISH

The interior of all exterior body compartments shall be a "Maintenance Free" smooth unpainted finish. All body seams shall be finished with a caulk sealant for both appearance and moisture protection.

REFLECTIVE STRIPE REQUIREMENTS

Material

All retroreflective materials shall conform to the requirements of ASTM D4956, *Standard Specification for Retroreflective Sheeting for Traffic Control*, Section 6.1.1 for Type I Sheeting.

All retroreflective materials used that are colors not listed in ASTM D4956, Section 6.1.1, shall have a minimum coefficient of retro-reflection of 10 with observation angle of 0.2 degrees and entrance angle of -4 degrees.

Any printed or processed retroreflective film construction used shall conform to the standards required of an integral colored film as specified in ASTM D4956, Section 6.1.1.

Minimum Requirements

A retroreflective stripe(s) shall be affixed to at least 50 percent of the cab and body length on each side, excluding the pump panel areas, and at least 25 percent of the width of the front of the vehicle, not including mirrors or other protrusions.

The stripe or combination of stripes shall be a minimum of 4 in. (100 mm) in total width.

The 4 in. (100 mm) wide stripe or combination of stripes shall be permitted to be interrupted by objects (i.e., receptacles, cracks between slats in roll up doors) provided the full stripe is seen as conspicuous when approaching the apparatus.

A graphic design shall be permitted to replace all or part of the required striping material if the design or combination thereof covers at least the same perimeter length(s).

GRAPHICS PROOF (Will match Signed Approval)

A color graphics proof of the reflective striping layout shall be provided for approval by Riverside County Fire Department prior to installation. The graphics proof shall be submitted to Riverside County Fire Department on 8.5" x 11" sheets with front, sides, rear and plan views, each on one (1) sheet. In addition if there is any special art work an additional sheet shall be provided showing all details. **Note:** The graphics color proof may not reflect the correct paint break lines on the chassis and body please refer to the paint section of your specifications for correct paint break lines.

REFLECTIVE STRIPE - CAB SIDE

The reflective stripe material shall be 6" wide, 3M Scotchlite 680 series graphic film.

- This reflective stripe shall be white in color.

REFLECTIVE STRIPE - CAB FRONT

The reflective stripe material shall be 6" wide, 3M Scotchlite 680 series graphic film.

- This reflective stripe shall be white in color.

REFLECTIVE STRIPE - BODY SIDES

The reflective stripe material shall be 6" wide, 3M Scotchlite 680 series graphic film.

- This reflective stripe shall be white in color.

The stripe shall extend straight from front of cab, then ahead of the rear wheels, it shall form an "S" shape and extend straight back to the rear of the body. The "S" portion of the stripe shall have a black shading in the corners.

CHEVRON REFLECTIVE STRIPE - REAR SIDES PANELS

At least 50 percent of the rear-facing vertical surfaces, visible from the rear of the apparatus, excluding any pump panel areas not covered by a door, shall be equipped with retroreflective striping in a chevron pattern sloping downward and away from the centerline of the vehicle at an angle of 45 degrees. Each stripe shall be 6" width.

The rear side panels of the body on each side of a rear stairway or compartment shall have a chevron style reflective stripe, extending from bumper height up to side compartment drip rail height. Each chevron panel shall be a full sheet and shall have a 3M UV over laminate to protect from UV rays, scene damage, and everyday use.

The stripe material shall be 3M Diamond Grade.

This reflective chevron stripe shall alternate red and fluorescent yellow-green in color.

LETTERING

GRAPHICS PROOF

A color graphics proof of the lettering layout shall be provided for approval by Riverside County Fire Department prior to installation. The graphics proof shall be submitted to Riverside County Fire Department on 8.5" x 11" sheets with front, sides, rear and plan views, each on one (1) sheet. In addition if there is any special art work an additional sheet shall be provided showing all details.

The following lettering shall be provided and installed on the completed unit as follows;

SIDE CAB DOOR LETTERING

There shall be eighteen (18) 5" high reflective letters furnished and installed on the vehicle.

Provide details.

- This reflective lettering shall be white in color.

There shall be ten (10) 4" high reflective letters furnished and installed on the vehicle.

Provide details.

- This reflective lettering shall be white in color.

UPPER BODY SIDE LETTERING

There shall be fifty (50) 11" high reflective letters furnished and installed on the vehicle.

Provide details.

- This reflective lettering shall be white in color.

REAR BODY LETTERING

FRONT OF CAB LETTERING

SUPPLIED DECALS

The bidder shall install one (1) Riverside County Fire Department supplied decal(s) on the vehicle, located on the.

EXTERIOR COMPARTMENT DOORS

ROLL-UP DOOR CONSTRUCTION - AMDOR

The apparatus shall be equipped with Amdor brand exterior roll-up compartment doors. Amdor roll-up doors shall be complete with the following features;

- 1" aluminum double wall slats with continuous ball & socket hinge joint and recessed dual durometer slat seal
- Double wall reinforced bottom panel with stainless steel lift bar latching system
- Bottom panel flange with cut-outs for ease of access with gloved hands
- Reusable slat shoes with positive snap-in securement
- Smooth interior door curtain to prevent equipment hang-ups
- One-piece aluminum door track / side frame, top gutter with non-marring seal
- Non-marring recessed side seals with UV stabilizers to prevent warping
- Dual leg bottom seal, with all wear component material to be Type 6 Nylon
- The door shall be warranted for a period of 36 months from the date of delivery. AMDOR Inc. liability covers the replacement or repair of any component that fails due to defects in material and / or workmanship during the coverage period.

Each shutter door shall decrease the compartment door frame opening approximately 2.00" in width and approximately 5.50" in height for the bottom section of door assembly.

The specified retroreflective stripe material shall be applied on the roll-up compartment doors. The stripe shall be precision machine cut for each door slat of the roll-up doors. Under no circumstance will the stripe material be cut on roll-up door surface.

BODY HEIGHT MEASUREMENTS

The vertical body dimensions shall be as follows:

AHEAD OF REAR AXLE

	<u>Description</u>	<u>Dimension</u>
A	Bottom of Subframe to Top of Body	83.7"
B	Bottom of Subframe to Bottom of Body	22.5"
C	Total Body Height	106.2"
D	Compartment Height Above Frame	48.0"
E	Compartment Height Below Frame	25.0"
F	Vertical Door Opening:	
	-with roll-up door	65.0"
	-with hinged door	68.5"

ABOVE REAR AXLE

	<u>Description</u>	<u>Dimension</u>
G	Vertical Door Opening - Above Rear Wheel	
	-with roll-up door	34.0"
	-with hinged door	37.5"

BEHIND REAR AXLE

	<u>Description</u>	<u>Dimension</u>
H	Bottom of Subframe to Bottom of Body	20.0"
I	Compartment Height Above Frame	48.0"

J	Compartment Height Below Frame	22.5"
K	Vertical Door Opening:	
	-with roll-up door	62.0"
	-with hinged door	65.5"

GENERAL

	<u>Description</u>	<u>Dimension</u>
L	Top of Body to Bottom of Drip Rail	33.5"

(Dimensions are approximate and subject to change during construction or design process.)

SEVEN (7) UPPER BODY COMPARTMENTS (OPEN)

The forward transverse compartment shall be 90.0" long x 27.0" wide x 28.5" deep. There shall be six (6) compartments parallel to the sides of the body, three (3) on each side. Each of these compartments shall be approximately 74" long x 28.0" wide x 28.5" deep. The side compartments shall be open under each door sill to allow for long equipment. Each compartment shall be integral with the body construction, and will not be bolted or add-on modules. The outside walls of each compartment will be double walled to prevent equipment from denting the outside painted surface.

Each compartment shall have a lift-up type compartment door hinged on the outboard side. Each door shall be fabricated from 3/16" aluminum tread plate. Each door shall have two (2) pneumatic type cylinders, one (1) at each end, attached to cast aluminum brackets mounted to the interior surface of the door to hold the door in both the opened and closed positions. Each door shall be mounted using multiple 16" long, equally spaced, 14 gauge stainless steel hinges, with 1/4" stainless steel pin. A polyester barrier film gasket shall be placed between stainless steel hinge and the body mounting surface as necessary to resist corrosion caused by dissimilar metals.

Each compartment door shall overlap a 2" vertical lip on the body roof to resist entry of moisture and sealed with automotive type rubber molding to provide a weather resistant seal.

Each roof compartment door shall have a chrome 7" handle bolted to center of each door.

Each compartment shall have a 13/16" drain hole located in floor of compartment with a 1" flexible drain tube that terminates below body.

NFPA door ajar system shall be automatically activated by an individual switch per compartment.

- Seven (7) OnScene Access PRO white LED, full height compartment light(s), horizontally mounted.

The hinged door(s) shall have an automotive tailgate style lift-up locking handle. A gasket shall be placed between the handle and the compartment exterior wall. Door latches shall be a single point, double-catch latch, mounted on the interior wall of the compartment panel.

SIDE ROOF COMPARTMENT - SHELF TRAC

The upper body side compartments shall be provided with horizontally mounted aluminum Shelf-Trac welded to the walls for vertical partition installation and adjustability.

ROOF COMPARTMENT - VERTICAL PARTITION

There shall be six (6) vertical partition(s) provided in the roof compartment(s). The partition(s) shall be used to retain or hold equipment in place during travel. Each partition shall be fabricated from 3/16" smooth aluminum and bolted to specified Shelf-Trac for ease of adjustment.

Three (3) Curbside
Three (3) Streetside

UPPER BODY WALKWAY

A 34" wide, upper body walkway shall be provided at the center of body and recessed into the roof structure. The walkway shall be fabricated from NFPA compliant 3/16" aluminum tread plate with continuously welded cross seams to resist moisture penetration into apparatus body, No Exceptions. The walkway shall be supported with 2" x 2" tubing on 14" - 22" centers.

13/16" drains shall be installed at front of walkway connected to 1" flexible drain tubes that will terminate below the body.

WALKWAY/STEP LIGHTS

There shall be four (4) OnScene Solutions Rough-Service 9" LED lights provided to illuminate the walkway or step area.

Each light shall be mounted in an extruded aluminum housing to protect against damage from personnel or equipment.

Lighting shall provide illumination at a minimum level of 2 fc (20 lx) on all work surfaces, steps, and walkways. Lighting shall be switchable but activated automatically when the vehicle park brake is set.

WALKWAY SAFETY DELINEATION

For increased visibility and safety, the front edge of walkway at top of stairway shall have two (2) rows of fluorescent yellow-green reflective squares provided between the diamond pattern of stepping surface to delineate stair tread edge.

ROOF ACCESS STAIRWAY

The rear of the body shall be provided with a minimum 34" wide roof access stairway recessed into the side rear compartments. Stairs treads shall be 9 1/2" minimum depth and formed from 3/16" NFPA compliant aluminum tread plate with uniformed riser height design. Stair treads will be continuously welded into side walls. Bolt-in tread design will not be acceptable.

Roll-out ladder design requiring set-up time and 8 plus feet behind apparatus or vertical ladders that do not allow firefighter to safely ascend or descend with equipment will not be acceptable.

STAIRWAY HANDRAILS

There shall be two (2) handrails provided, one (1) on each side wall of recessed center stairway providing three-points of contact at all times for safer access to roof compartments. The handrails shall be angled for optimum use during ingress or egress of the upper walkway area.

Handrails shall be NFPA compliant 1-1/4" knurled 304 stainless steel with welded end stanchions.

WALKWAY/STEP LIGHTS

There shall be two (2) OnScene Solutions Rough-Service 9" LED lights provided to illuminate the walkway or step area.

Each light shall be mounted in an extruded aluminum housing to protect against damage from personnel or equipment.

Lighting shall provide illumination at a minimum level of 2 fc (20 lx) on all work surfaces, steps, and walkways. Lighting shall be switchable but activated automatically when the vehicle park brake is set.

STEP COMPARTMENT - LOWER 2 STEPS

There shall be one (1) compartment located in the roof access stairway area below frame level. The compartment will cover the bottom two (2) steps and have a hinged lift-up 3/16" NFPA compliant aluminum tread plate step door. The compartment shall be manufactured to resist road debris, dirt and moisture from entering. The compartment shall be 33" wide x 24" high x maximum depth based on chassis mounted components and requirements for structural integrity of the body.

The compartment shall have an LED light that shall automatically activate when the door is opened and wired to the NFPA required hazard warning light provided in the cab.

- The hinged door(s) shall have a stainless steel 6" offset bent D-ring locking handle. A gasket shall be placed between handle and door. Door latch shall be a single point latch flush mounted to exterior door panel.
- One (1) OnScene Access PRO white LED light(s) mounted in cabinet(s).
- The specified portable winch shall be mounted in compartment using a heavy duty "U" shaped channel. Winch receiver tube and mounting pin shall be utilized to hold in place during travel.

STEP COMPARTMENT - UPPER

There shall be one (1) upper compartment located directly below walkway area. The compartment shall have a horizontally hinged brushed stainless steel door. The compartment shall be manufactured to resist road debris, dirt and moisture from entering. The compartment shall be approximately 26" wide x 8" high x maximum depth available.

Each Compartment shall have an OnScene LED light that shall be automatically activated when the door is opened and wired to the NFPA required hazard warning light provided in the cab.

Devices to secure specified equipment, compartment dividers, or UHMW plastic angles, or sheeting will be used for storage of specified equipment as required to prevent damage to equipment.

Upper under walkway storage compartment to be 16ft Deep.

- The hinged door(s) shall have a stainless steel 6" offset bent D-ring locking handle. A gasket shall be placed between handle and door. Door latch shall be a single point latch flush mounted to exterior door panel.
- One (1) OnScene Access PRO white LED light(s) mounted in cabinet(s).
- Storage for One (1) pieces of wood lumber. Size of lumber to be provided during the pre-construction meeting.

FOLD-DOWN STEP

There shall be one (1) 30" wide fold-down step located at the bottom of the roof access stairway to reduce the distance from the ground to the first step. The step surface shall be NFPA compliant aluminum treadplate. The step shall manually fold up into the stairway with an over-center gas shock to hold step in position during travel. The step shall activate the "Hazard Warning Light" in the cab when not in the stowed position.

REAR BODY HANDRAILS

There shall be two (2) 24" vertical handrails on rear body. Handrails shall be NFPA compliant 1-1/4" knurled 304 stainless steel with welded end stanchions.

A safety sign FAMA23, which warns of the proper climbing method, shall be visible to personnel entering the cab and at each designated climbing location on the body.

A safety sign FAMA24, which warns personnel not to ride on the vehicle, shall be located at the rear step areas and at any cross walkways.

BODY WIDTH DIMENSIONS

The body shall be 100.0" wide, and 102.0" wide at drip rails. Interior compartment depth dimensions shall be approximately:

<u>Area Description</u>	<u>Dimension</u>
Transverse above subframe	95.0"
Compartment depth below subframe	24.5"

STREETSIDE COMPARTMENT - FRONT (S1)

The interior useable compartment width shall be approximately 64.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 58.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed 1250 cylinder lock shall be provided on bottom rail of the roll-up door.
- The roll-up doors shall be manually operated with a key.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 81 series aluminum tray base with rating of 1,000 lbs. Slide-out tray(s) base shall be approximately 47" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Slide base shall extend depth specified, less 4". Each slide base shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will lock the tray in the closed and full extension positions.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 1/2".

- The above component(s) shall have a smooth un-painted finish.
- Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- There shall be one (1) OnScene Solutions 81 series aluminum tray base with rating of 1,000 lbs. Slide-out tray(s) base shall be approximately 47" deep and as wide as the compartment layout or door opening permits located above the body subframe and shall be vertically adjustable in height. Slide base shall extend depth specified, less 4". Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will lock the tray in the closed and full extension positions.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 ½".
 - The above component(s) shall have a smooth un-painted finish.
 - Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- There shall be one (1) OnScene Solutions 84 series slide-out, drop-down style aluminum tray base with 90% extension, and rating of 150 lbs. Slide-out tray(s) base shall be approximately 47" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and shall be vertically adjustable in height. Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will hold the tray in the closed position.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 ½".
 - The above component(s) shall have a smooth un-painted finish.
 - Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- There shall be a transverse plywood storage module for full 4' x 8' sheets of plywood without altering the size. The module shall be fabricated from 3/16" (.188) 3003H-14 aluminum alloy sheet and shall have hinged retainer doors at each end to hold plywood in place. Storage module shall hold the following sheets of plywood;
 - Six (6) Riverside County Fire Department supplied sheets of 4' x 8' x ¾" sheets of plywood.

- The 12 volt electrical distribution panel shall be located in the front lower compartment.
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.
- The controls for the specified light tower(s).
- One (1) OnScene 10" Access Pro white LED ground light(s) shall be provided below the body. Light(s) shall be switchable but activated automatically when the park brake is set.

STREETSIDE COMPARTMENT - AHEAD OF REAR WHEELS (S2)

The interior useable compartment width shall be approximately 64.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 58.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed 1250 cylinder lock shall be provided on bottom rail of the roll-up door.
- The roll-up doors shall be manually operated with a key.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 81 series aluminum tray base with rating of 1,000 lbs. Slide-out tray(s) base shall be approximately 47" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Slide base shall extend depth specified, less 4". Each slide base shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will lock the tray in the closed and full extension positions.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 1/2".

- The above component(s) shall have a smooth un-painted finish.
- Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- There shall be one (1) OnScene Solutions 84 series slide-out, drop-down style aluminum tray base with 90% extension, and rating of 150 lbs. Slide-out tray(s) base shall be approximately 30" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and shall be vertically adjustable in height. Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will hold the tray in the closed position.

OSS Out & Down Tray to be 30" Deep x 57" Wide and rated at 250lbs.

- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 ½".
 - The above component(s) shall have a smooth un-painted finish.
 - Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- There shall be one (1) OnScene Solutions 84 series slide-out, drop-down style aluminum tray base with 90% extension, and rating of 150 lbs. Slide-out tray(s) base shall be approximately 47" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and shall be vertically adjustable in height. Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will hold the tray in the closed position.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 ½".
 - The above component(s) shall have a smooth un-painted finish.
 - Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- **One (1) Lista drawer cabinet, model MS450-NL-LILO-NR shall be provided in compartment. The Lista cabinet shall be x 47" wide x 21 5/8" high x 22-1/2" deep. Cabinet shall have three (3) individual locking drawers as follows; one (1) 5", one (1) 5", one (1) 5".**
- **Cabinet color shall be Red**

- **Drawer colors shall be Light Gray**
- **Latch In/Out option**

Each cabinet shall be provided with a individual lock (RG) and two (2) keys.

Each cabinet drawer shall be provided with a individual latch (IDL).

The cabinet shall be Red in color.

- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.
- There shall be one (1) 120 VAC, 20 amp custom fabricated outlet strip provided with approximately two (2) duplex outlets per foot in height. Strip shall be approximately long.

To be installed on middle OSS 47.5" Out & Down Tray for customer supplied/installed chargers.

Power Strip to be installed on cat track (or similar) to allow the power strip to move with the tray.

- Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.
- The outlet shall be located on rearward wall, upper left area.
- There shall be one (1) underbody slide-out step. Step surface shall be constructed from 9" deep DiamondBack non-slip vented aluminum stair treads mounted to underbody using Delron plastic slides for corrosion resistance. Step slide shall be securely held in both out and stored position, utilizing a heavy duty pneumatic cylinder designed to have an over center location which will assist the step in both extension and retraction. Each step shall be designed to hold 500 lbs.
- One (1) OnScene 10" Access Pro white LED ground light(s) shall be provided below the body. Light(s) shall be switchable but activated automatically when the park brake is set.

STREETSIDE COMPARTMENT - ABOVE REAR WHEELS (S3)

The interior useable compartment width shall be approximately 56.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 50.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed 1250 cylinder lock shall be provided on bottom rail of the roll-up door.
- The roll-up doors shall be manually operated with a key.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) storage module(s) for air bags. The module shall be fabricated from 1/8" (.125) 3003H-14 aluminum alloy sheet. Circular notches shall be provided along the front edge to ease the access to the air bags. Each bay shall be sized to hold the air bag and a matching piece of 1/2" plywood (plywood not provided).

Module shall be designed to store the following air bags;

- There shall be four (4) OnScene Solutions cargo straps provided to secure the stored equipment.
- There shall be one (1) OnScene Solutions cargo straps provided to secure the stored equipment.

To be mounted horizontally in the lower part of the of the airbag module to secure the Pelican Boxes from sliding into roll up door.

- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.

STREETSIDE COMPARTMENT - ABOVE REAR WHEELS (S4)

The interior useable compartment width shall be approximately 56.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 50.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed 1250 cylinder lock shall be provided on bottom rail of the roll-up door.
- The roll-up doors shall be manually operated with a key.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 81 series aluminum tray base with rating of 1,000 lbs. Slide-out tray(s) base shall be approximately 47" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Slide base shall extend depth specified, less 4". Each slide base shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will lock the tray in the closed and full extension positions.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 1/2".
 - The above component(s) shall have a smooth un-painted finish.
 - Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.

- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- There shall be one (1) OnScene Solutions 84 series slide-out, drop-down style aluminum tray base with 90% extension, and rating of 150 lbs. Slide-out tray(s) base shall be approximately 47" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and shall be vertically adjustable in height. Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will hold the tray in the closed position.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 ½".
 - The above component(s) shall have a smooth un-painted finish.
 - Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.

STREETSIDE COMPARTMENT - REAR (S5)

The interior useable compartment space shall be approximately 70.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 64.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed 1250 cylinder lock shall be provided on bottom rail of the roll-up door.
- The roll-up doors shall be manually operated with a key.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) 400 lbs. slide-out tray(s) approximately 24" deep and as wide as the compartment layout or door opening permits. The tray shall be fabricated from 3/16" 3003 aluminum sheet with a 3" vertical lip and welded corners to form a box type tray. The sliding tracks shall extend 100% of the slide length. The tray assembly shall utilize a pneumatic cylinder mounted on underside to hold the tray in both the extended and closed positions.
 - Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
 - The above component(s) shall have a smooth un-painted finish.

- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front face of the tray.
- This reflective stripe shall be red/white in color.
- There shall be two (2) OnScene Solutions 83 series aluminum tray base with 70% extension, and rating of 1,000 lbs. Slide-out tray(s) base shall be full width (street/curb) and as wide as the compartment layout or door opening permits, capable of extending out either side of the body located above the level of the chassis frame rails. Each slide base shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will lock the tray in the closed, 40% extended and 70% extended positions.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 ½".
 - The above component(s) shall have a smooth un-painted finish.
 - Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
 - **Equipment mounting on transverse tray shall be provided;**

The following customer supplied Paratech equipment shall be mounted on the selected transverse OSS 1000 lb Pull Out Trays.

6	ea.	Longshore Strut 203
6	ea.	Longshore Strut 304
6	ea.	Longshore Strut 406
6	ea.	Longshore Strut 610
4	ea.	Longshore Extension 235
4	ea.	Longshore Extension 435
4	ea.	Longshore Extension 635
6	ea.	Longshore Adjustable Brace B23
6	ea.	Longshore Adjustable Brace B57
24	ea.	Hinged Base Plate w/Ring 12"
12	ea.	Rigid Base 6"
12	ea.	Swivel Base 6"
8	ea.	Multi Chain Base
8	ea.	Contour Base
8	ea.	Convex Multi Base
4	ea.	Hydrافusion Strut 16"
2	ea.	Hydrافusion Pump w/ Gauge
4	ea.	Hydrافusion Longshore Screw Adapter

Gross Total Equipment Weight 1846 lbs

- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- There shall be one (1) slide-out smooth aluminum vertical tool board(s) approximately 24" deep. Each tool board(s) vertical exterior edge shall have a double 90 degree formed edge to provide an easy grip handle. The top and bottom of tool board(s) shall be provided with Accuride 9300 series slide tracks. Each board shall be rated for a maximum 200 lbs. evenly distributed load. Each tool board shall utilize a pneumatic cylinder to hold the tool board in both the opened and closed positions.
 - The tool board material shall be PAC Trac double face 7040 extrusion with the tracks in a horizontal orientation.
 - Front side.
 - Rear side.
 - Each tool board shall be horizontally adjustable; mounted on aluminum shelf Trac on compartment floor.
- 3M™ Diamond Grade™ striping shall be provided on both sides of the tool board.
- This reflective stripe shall be red/white in color.
- There shall be one (1) slide-out smooth aluminum vertical tool board(s) approximately 24" deep. Each tool board(s) vertical exterior edge shall have a double 90 degree formed edge to provide an easy grip handle. The top and bottom of tool board(s) shall be provided with Accuride 9300 series slide tracks. Each board shall be rated for a maximum 200 lbs. evenly distributed load. Each tool board shall utilize a pneumatic cylinder to hold the tool board in both the opened and closed positions.
 - The tool board material shall be PAC Trac double face 7040 extrusion with the tracks in a horizontal orientation.
 - Front side.
 - Rear side.
 - Each tool board shall be horizontally adjustable; mounted on aluminum shelf Trac on compartment floor.
- There shall be one (1) vertical compartment partition(s) provided dividing the compartment into fore and aft sides. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet. Partition shall be approximately Fill In from forward wall of compartment.
 - Partition shall be bolted in position at base and top of partition.

- The above component(s) shall have a smooth un-painted finish.

Reel Mounting: Reel #1

- One (1) Hannay ECR1618-17-18 electric cable reel(s) capable of storing 200' of 10/3 electric cable. Reel(s) shall be designed to hold 110% of the capacity of cord length, with fully enclosed 45 amp, three (3) conductor collector rings. Reel(s) shall be mounted to channel structure that allows for side-to-side adjustment of reel position.
 - Power rewind control(s) shall be in a position where the operator can observe the rewinding operation and not be more than 72 in. (1830 mm) above the operator's standing position, and shall be marked with a label indicating its function and shall be guarded to prevent accidental operation.
 - A label shall be provided in a visible location adjacent to reel with following information: Current rating, Current type, Phase, Voltage, and Total cord length.
 - The cable reel shall equipped with 200' of 10/3 SEOW black cable, a molded plastic ball clamp, and a single heavy duty L5-30 twist-lock female plug at the end.
- One (1) Akron model EJBX series, cast aluminum electrical power distribution box with gray powder coat painted finish shall be provided. The power distribution box shall meet all requirements described in NFPA 1900. The power distribution box shall include the following outlets mounted on a backlit face plate;
 - A 12" pigtail that terminates in an L5-30 configuration to match the cable on the cord reel. The outlet configuration shall include:
 - One (1) 120 VAC, 5-20 duplex straight-blade receptacle
 - One (1) 120 VAC, 5-20 duplex straight-blade receptacle
 - One (1) 120 VAC, 5-20 duplex straight-blade receptacle
 - One (1) 120 VAC, 5-20 duplex straight-blade receptacle
- One (1) Akron Brass model EJB-VMT aluminum treadplate vertical mounting bracket for specified power distribution box shall be provided and mounted in compartment per Riverside County Fire Department.

Mounting location for power distribution box will be determined at Final Inspection.

- The fairlead roller shall be mounted directly to the reel.
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.
- There shall be one (1) underbody slide-out step. Step surface shall be constructed from 9" deep DiamondBack non-slip vented aluminum stair treads mounted to underbody using Delron plastic slides for corrosion resistance. Step slide shall be securely held in both out and stored position, utilizing a heavy duty pneumatic cylinder designed to have an over center location which will assist the step in both extension and retraction. Each step shall be designed to hold 500 lbs.
- One (1) OnScene 10" Access Pro white LED ground light(s) shall be provided below the body. Light(s) shall be switchable but activated automatically when the park brake is set.

CURBSIDE COMPARTMENT - FRONT (C1)

The interior useable compartment width shall be approximately 64.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 58.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed 1250 cylinder lock shall be provided on bottom rail of the roll-up door.
- The roll-up doors shall be manually operated with a key.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be two (2) OnScene Solutions 81 series aluminum tray base with rating of 1,000 lbs. Slide-out tray(s) base shall be approximately 47" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Slide base shall extend depth specified, less 4". Each slide base shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will lock the tray in the closed and full extension positions.

HANGER HOOK

Six (6) heavy duty steel hanger hook(s) shall be provided on the interior face of the slide tray vertical partitions, three (3) on each board. See 2D Drawing.

- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 ½".
 - The above component(s) shall have a smooth un-painted finish.
 - Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
- There shall be six (6) Zico 1000 series KD-UH walkaway type SCBA air pack bracket(s) with high cycle coated spring clips and short foot plate.

Mount three (3) on the Forward Face of the forward slide tray vertical partition and three (3) on the rearward face of the rearward slide tray vertical partition. Reference 2D drawing.

- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- There shall be a transverse plywood storage module which extends from the opposite side of the body (specified in opposite side compartment).
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.
- 120/240 VAC load center location.
- The generator gauge panel.
- There shall be one (1) 240 VAC outlet(s) located in compartment.
 - The outlet receptacle(s) shall be **50 amp, twist-lock (NEMA L6-50R)**.
 - Outlet(s) shall be powered through the on-board generator system.
 - The outlet shall be located on forward wall, lower right area.
- One (1) OnScene 10" Access Pro white LED ground light(s) shall be provided below the body. Light(s) shall be switchable but activated automatically when the park brake is set.

CURBSIDE COMPARTMENT - AHEAD OF REAR WHEEL (C2)

The interior useable compartment width shall be approximately 64.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 58.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed 1250 cylinder lock shall be provided on bottom rail of the roll-up door.
- The roll-up doors shall be manually operated with a key.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

- The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) Austin Front Drawer Release (FDR) 400 lbs. slide-out tray(s) approximately 30" deep and as wide as the compartment layout or door opening permits. Each tray shall be vertically adjustable. The FDR on front of tray will deduct 1.5" from specified depth. The tray shall be fabricated from 3/16" 3003 aluminum sheet with a 3" vertical lip and welded corners to form a box type tray. The sliding tracks shall extend 100% of the slide length.
 - Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
 - The above component(s) shall have a smooth un-painted finish.

- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front face of the tray.
- This reflective stripe shall be red/white in color.
- There shall be two (2) OnScene Solutions 84 series slide-out, drop-down style aluminum tray base with 90% extension, and rating of 150 lbs. Slide-out tray(s) base shall be approximately 30" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and shall be vertically adjustable in height. Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will hold the tray in the closed position.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 ½".
 - The above component(s) shall have a smooth un-painted finish.
 - Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.

There shall be one (1) module fabricated from 3/16" (.188) 3003H-14 aluminum alloy smooth sheet. The module will be divided into fourths and have cargo netting across the front.

See 2D drawing for Reference.

- Above module shall have cargo netting of 1" - 2" nylon webbing to help restrain equipment in module.
- **There shall be one (1) storage module for Riverside County Fire Department supplied oxygen, acetylene and propane.** The module shall be fabricated from 1/8" (.125) 3003H-14 aluminum alloy sheet. The module shall have a 2" slope, front to back to prevent cylinders from sliding out.

To be located in the forward lower portion of the compartment. Reference 2D Drawing.

- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.
- One (1) Riverside County Fire Department supplied gas powered hydraulic power unit(s) shall be mounted in compartment.
- Mount(s) shall be provided and installed for two (2) Riverside County Fire Department supplied ram(s).

Holmatro Rams, Qty one (1) TR5340 and Qty one (1) TR5370 shall be mounted to the back wall behind the cutter and spreader.

- Mounts will be supplied and installed for one (1) Riverside County Fire Department supplied cutter(s).

Holmatro Cutter

- Mounts will be supplied and installed for one (1) Riverside County Fire Department supplied spreader(s).

Holmatro Spreader

- There shall be one (1) underbody slide-out step. Step surface shall be constructed from 9" deep DiamondBack non-slip vented aluminum stair treads mounted to underbody using Delron plastic slides for corrosion resistance. Step slide shall be securely held in both out and stored position, utilizing a heavy duty pneumatic cylinder designed to have an over center location which will assist the step in both extension and retraction. Each step shall be designed to hold 500 lbs.
- One (1) OnScene 10" Access Pro white LED ground light(s) shall be provided below the body. Light(s) shall be switchable but activated automatically when the park brake is set.

CURBSIDE COMPARTMENT - ABOVE REAR WHEEL (C3)

The interior useable compartment width shall be approximately 56.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 50.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed 1250 cylinder lock shall be provided on bottom rail of the roll-up door.
- The roll-up doors shall be manually operated with a key.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 81 series aluminum tray base with rating of 1,000 lbs. Slide-out tray(s) base shall be approximately 47" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Slide base shall extend depth specified, less 4". Each slide base shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will lock the tray in the closed and full extension positions.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 1/2".
 - The above component(s) shall have a smooth un-painted finish.

- Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.

Vertical Partitions to be 12" Tall in Tray

- Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- There shall be one (1) OnScene Solutions 84 series slide-out, drop-down style aluminum tray base with 90% extension, and rating of 150 lbs. Slide-out tray(s) base shall be approximately 47" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and shall be vertically adjustable in height. Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will hold the tray in the closed position.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 ½".
 - The above component(s) shall have a smooth un-painted finish.
 - Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.

CURBSIDE COMPARTMENT - ABOVE REAR WHEEL (C4)

The interior useable compartment width shall be approximately 56.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 50.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed 1250 cylinder lock shall be provided on bottom rail of the roll-up door.
- The roll-up doors shall be manually operated with a key.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 81 series aluminum tray base with rating of 1,000 lbs. Slide-out tray(s) base shall be approximately 47" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Slide base shall extend depth specified, less 4". Each slide base shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will lock the tray in the closed and full extension positions.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 1/2".
 - The above component(s) shall have a smooth un-painted finish.
- There shall be one (1) storage module(s) to hold **seven (7) saw(s)** and required maintenance items. The module shall be fabricated from a combination 1/8" & 3/16" 3003H-14 aluminum alloy sheet **along with various OSS Straps**

- Equipment mounting on slide tray shall be:
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- There shall be one (1) OnScene Solutions 84 series slide-out, drop-down style aluminum tray base with 90% extension, and rating of 150 lbs. Slide-out tray(s) base shall be approximately 30" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and shall be vertically adjustable in height. Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will hold the tray in the closed position.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 ½".
 - The above component(s) shall have a smooth un-painted finish.
 - Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- This reflective stripe shall be red/white in color.
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.

CURBSIDE COMPARTMENT - REAR (C5)

The interior useable compartment space shall be approximately 70.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 64.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed 1250 cylinder lock shall be provided on bottom rail of the roll-up door.
- The roll-up doors shall be manually operated with a key.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) 400 lbs. slide-out tray(s) approximately 24" deep and as wide as the compartment layout or door opening permits. The tray shall be fabricated from 3/16" 3003 aluminum sheet with a 3" vertical lip and welded corners to form a box type tray. The sliding tracks shall extend 100% of the slide length. The tray assembly shall utilize a pneumatic cylinder mounted on underside to hold the tray in both the extended and closed positions.
 - Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
 - The above component(s) shall have a smooth un-painted finish.

- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front face of the tray.
- This reflective stripe shall be red/white in color.
- There shall be one (1) Austin Front Drawer Release (FDR) 400 lbs. slide-out tray(s) approximately 24" deep and as wide as the compartment layout or door opening permits. Each tray shall be vertically adjustable. The FDR on front of tray will deduct 1.5" from specified depth. The tray shall be fabricated from 3/16" 3003 aluminum sheet with a 3" vertical lip and welded corners to form a box type tray. The sliding tracks shall extend 100% of the slide length.

Tray to be 6" High and will have a lift-up work station/surface attached. To be mounted below extended floor.

- Any equipment mounting on slide tray shall be provided by Riverside County Fire Department after delivery.
- The above component(s) shall have a smooth un-painted finish.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front face of the tray.
- This reflective stripe shall be red/white in color.
- There shall be two (2) OnScene Solutions 83 series aluminum tray base with 70% extension, and rating of 1,000 lbs. Slide-out tray(s) base shall be approximately 94" deep; capable of extending out either side of the body located above the level of the chassis frame rails. (Specified in opposite side compartment.)

- Equipment mounting on transverse tray shall be provided;

The following customer supplied Paratech equipment shall be mounted on the selected transverse OSS 1000 lb Pull Out Trays.

6	ea.	Longshore Strut 203
6	ea.	Longshore Strut 304
6	ea.	Longshore Strut 406
6	ea.	Longshore Strut 610
4	ea.	Longshore Extension 235
4	ea.	Longshore Extension 435
4	ea.	Longshore Extension 635
6	ea.	Longshore Adjustable Brace B23
6	ea.	Longshore Adjustable Brace B57
24	ea.	Hinged Base Plate w/Ring 12"
12	ea.	Rigid Base 6"
12	ea.	Swivel Base 6"
8	ea.	Multi Chain Base
8	ea.	Contour Base

8	ea.	Convex Multi Base
4	ea.	Hydrafusion Strut 16"
2	ea.	Hydrafusion Pump w/ Gauge
4	ea.	Hydrafusion Longshore Screw Adapter
4	ea.	Hydrafusion Acmethread Screw Adapter

Gross Total Equipment Weight 1846 lbs

Reel Mounting: Reel #1

- One (1) Hannay ECR1618-17-18 electric cable reel(s) capable of storing 200' of 10/3 electric cable. Reel(s) shall be designed to hold 110% of the capacity of cord length, with fully enclosed 45 amp, three (3) conductor collector rings. Reel(s) shall be mounted to channel structure that allows for side-to-side adjustment of reel position.
 - Power rewind control(s) shall be in a position where the operator can observe the rewinding operation and not be more than 72 in. (1830 mm) above the operator’s standing position, and shall be marked with a label indicating its function and shall be guarded to prevent accidental operation.
 - A label shall be provided in a visible location adjacent to reel with following information: Current rating, Current type, Phase, Voltage, and Total cord length.
 - The cable reel shall equipped with 200' of 10/3 SEOWW yellow cable, a molded plastic ball clamp, and a single heavy duty L5-30 twist-lock female plug at the end.
- One (1) Akron model EJBX series, cast aluminum electrical power distribution box with gray powder coat painted finish shall be provided. The power distribution box shall meet all requirements described in NFPA 1900. The power distribution box shall include the following outlets mounted on a backlit face plate;
 - A 12" pigtail that terminates in an L5-30 configuration to match the cable on the cord reel. The outlet configuration shall include:
 - One (1) 120 VAC, 5-20 duplex straight-blade receptacle
 - One (1) 120 VAC, 5-20 duplex straight-blade receptacle
 - One (1) 120 VAC, 5-20 duplex straight-blade receptacle
 - One (1) 120 VAC, 5-20 duplex straight-blade receptacle
- One (1) Akron Brass model EJB-VMT aluminum treadplate vertical mounting bracket for specified power distribution box shall be provided and mounted in compartment per Riverside County Fire Department.

Mounting location for power distribution box will be determined at final inspection.

- The fairlead roller shall be mounted directly to the reel.

Reel Mounting: Reel #2

- One (1) Hannay EF1520-17-18 low pressure air hose reel(s) shall be provided in this compartment. Reel shall be designed to hold 110% of the capacity needed.
 - Power rewind control(s) shall be in a position where the operator can observe the rewinding operation and not be more than 72 in. (1830 mm) above the operator's standing position, and shall be marked with a label indicating its function and shall be guarded to prevent accidental operation.
 - A label shall be provided in a visible location adjacent to reel with following information: (1) Utility air or breathing air, (2) Operating pressure, (3) Total hose length, (4) Hose size (ID).

To accommodate 300ft 3/8" ID Low Pressure Hose Plumbed to the BOSS Air System.

- The hose reel shall be equipped with **300' of 3/8"** Parker Series 7092 GST II low pressure air hose rated for 300 PSI maximum pressure. A molded plastic ball clamp shall be provided on the hose to stop it at the 4-way roller. The hose shall be Blue in color.
- The air supply shall be from the **BOSS Air System.**
- A reel shut-off valve, 0 - 125 psi adjustable low pressure regulator, and 0 - 300 psi gauge shall be provided on an aluminum control panel with flow diagram graphic overlay near the air reel location, not exceeding 72" from ground.

Pressure Regulator and Gauge shall be located adjacent to the low pressure air reel.

- The fairlead roller shall be mounted directly to the reel.
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.
- There shall be one (1) underbody slide-out step. Step surface shall be constructed from 9" deep DiamondBack non-slip vented aluminum stair treads mounted to underbody using Delron plastic slides for corrosion resistance. Step slide shall be securely held in both out and stored position, utilizing a heavy duty pneumatic cylinder designed to have an over center location which will assist the step in both extension and retraction. Each step shall be designed to hold 500 lbs.
- One (1) OnScene 10" Access Pro white LED ground light(s) shall be provided below the body. Light(s) shall be switchable but activated automatically when the park brake is set.

ROOF ACCESS STAIRWAY

The rear of the body shall be provided with a recessed center stairway in lieu of a compartment.

BODY OPTIONS AND UPGRADES

PLASTIC FLOOR AND SHELF TILE

Turtle Plastics 12" x 12" x 1/2", self-draining plastic inter-locking material shall be cut to size and cover all compartment floors, shelves, and trays.

- The plastic floor tile shall be black.
- The plastic edge trim shall be black.

ROPE ANCHOR OR PORTABLE WINCH RECEIVERS

The completed unit shall have an integrated receiver or anchor system for use with removable rope anchor point and/or a portable electric winch, when specified.

Receivers or anchors installed at any location on the apparatus for use as removable winch anchors shall be designed and affixed to provide at least a 2.0 to 1 straight line pull no-yield safety factor over the load rating of the removable winch.

Receivers or anchors installed at any location on the apparatus for use with rope operations shall be designed and affixed to the apparatus to provide at least a 9,000 lbf (40,000 N) no-yield condition with a straight line pull.

A safety sign FAMA28 shall be located on or near each receiver or anchor stating the maximum straight line pull rating.

Side receiver(s) (if specified) shall have the following load rating:

	<u>STRAIGHT PULL</u>	<u>SAFETY FACTOR</u>
Rope Tie Off:	600 Lbs.	15:1
Winch:	5,000 Lbs.	2:1

Front and/or rear receiver(s) (if specified) shall have the following load rating:

	<u>STRAIGHT PULL</u>	<u>SAFETY FACTOR</u>
Rope Tie Off:	600 Lbs.	15:1
Winch:	Winch Load Rating (9,000 Lbs. Max)	2:1

The following items shall be provided to accomplish rope rescue and/or portable winch operation;

ROOF LOCATIONS

- Two (2) rope anchor point receiver(s) shall be provided and located on outboard edges of body roof area. The receiver(s) shall be manufactured using 2" x 2" x 1/4" wall steel trailer style receiver tube welded to 6" x 4" x 1/2" thick steel plate base and bolted to body structure. Anchor point will add 3-1/4" to body height and does not extend beyond body (without anchor point). The receiver assembly shall have a black powder coat paint finish. Each receiver location shall have a stainless steel scuff plate to protect paint on upper body. Reinforcements to body shall be added as necessary to increase the structural integrity and to provide a working weight rating of 600 lbs., with a 9,000 lbs. maximum load based upon using a 15:1 safety factor to match typical 1/2" rescue rope ratings.

Roof anchor receivers to be located on the rear body roof corners facing towards the rear.

ACCESSORIES

- Two (2) removable rope anchor(s) shall be provided for use with upper body specified receivers. Each rope anchor shall be fabricated from 3/4" steel, 2" high x 11.5" long with a 3" OD/2" ID eyelet. Eyelet end shall have radiused edge to prevent damage to rope or carabineer. Each rope anchor shall have a black powder coat paint finish.
- A steel 5/8" x 3" hitch pin shall lock the rope anchor into the receiver tube.

ACCESSORIES

- Two (2) removable rope anchor(s) shall be provided for use with lower body specified receivers. Each rope anchor shall be fabricated from 3/4" steel, 2" high x 11.5" long with a 3" OD/2" ID eyelet. Eyelet end shall have radiused edge to prevent damage to rope or carabineer. Each rope anchor shall have a black powder coat paint finish.
- An aluminum mounting bracket shall be provided to store rope anchor(s) inside a body compartment as close to receiver location as possible.

A portable winch shall not be provided with completed unit.

STREETSIDE WHEEL WELL

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with black hammertone powder coat paint finish located on the streetside of the body in the forward wheel well panel area for use with removable rope anchor and/or a portable electric winch (when specified).
- A steel 5/8" x 3" hitch pin shall be provided with each receiver tube.
 - The receiver(s) shall have one (1) rubber cover(s) provided.

CURBSIDE WHEEL WELL

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with black hammertone powder coat paint finish located on the curbside of the body in the forward wheel well panel area for use with removable rope anchor and/or a portable electric winch (when specified).
- A steel 5/8" x 3" hitch pin shall be provided with each receiver tube.
 - The receiver(s) shall have one (1) rubber cover(s) provided.

REAR BUMPER

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with black hammertone powder coat paint finish located at the rear bumper for use with removable rope anchor point and/or a portable electric winch (when specified).
- A steel 5/8" x 3" hitch pin shall be provided with each receiver tube.
 - There shall be one (1) 12 VDC plug(s) with quick connect provided to power a Warn portable winch. All 12 VDC cables to be sized according to Warn and installation for intended use.
 - The receiver(s) shall have one (1) rubber cover(s) provided.

LOWER SIDE BODY PROTECTION - RUB RAIL

OnScene Solutions rub rails shall be provided below the compartment door openings on both the streetside and curbside.

The rub rail shall be fabricated from 6063 extruded aluminum, measuring approximately 2-3/4" high x 1-3/8" thick with tapered aluminum end caps. The rub rail shall be bolted to the body using stainless steel bolts and 1-1/2" diameter x 5/8" thick rubber mount isolators to prevent damage to the body.

The rails shall incorporate LED clearance marker lighting recessed into the rail fascia to avoid damage to the light in case of impact. The rub rail shall have an accessory mounting track integrated into the backside of the rail to allow mounting of accessories such as ground lighting.

ROLL-OUT AWNING STREETSIDE

A Carefree Mirage, 110 Volt AC powered, Lateral Arm Acrylic Patio Awning with Direct Response Electronics shall be installed on the body. The Direct Response Electronics includes easy-to-use controls and a Motion Detection System. The awning shall have a system to detect canopy motion, the most important element to prevent wind/weather damage. The awning shall automatically retract when the canopy reaches a certain level of movement, you determine the movement level on the control panel.

The 110V motor shall be completely sealed and UL approved. The awning pitch shall be adjusted to up to 30"

The awning shall be 21' wide with a 10' projection, (size refers to box length; actual fabric length will be 8" shorter.)

The Mirage shall be covered by a "Two and Four" Limited Warranty - Two years 100% parts, labor, & freight on canopy, four years 100% parts, labor, and freight on motor, electronics, roller & hardware. Warranty covers manufacturer's defects only. Wind and rain damage are not covered.

A red flashing or rotating light located in the driving compartment shall be illuminated automatically whenever the vehicles parking brake is not fully engaged, indicating that the awning is not in stowed position, as required by NFPA 1900.

- The Firesist HUV awning fabric color shall be red (#88003-000).

The specified awning above shall be recess mounted into upper body side. An aluminum box enclosure shall be fabricated and recessed into upper body side for awning mounting and painted same color as upper body. The recessed awning shall add approximately 1.5" to body width.

AWNING HOUSING COLOR

The awnings standard white housing color shall be re-painted to match upper body color.

ROLL-OUT AWNING CURBSIDE

A Carefree Mirage, 110 Volt AC powered, Lateral Arm Acrylic Patio Awning with Direct Response Electronics shall be installed on the body. The Direct Response Electronics includes easy-to-use controls and a Motion Detection System. The awning shall have a system to detect canopy motion, the most important element to prevent wind/weather damage. The awning shall automatically retract when the canopy reaches a certain level of movement, you determine the movement level on the control panel.

The 110V motor shall be completely sealed and UL approved. The awning pitch shall be adjusted to up to 30"

The awning shall be 21' wide with a 10' projection, (size refers to box length; actual fabric length will be 8" shorter.)

The Mirage shall be covered by a "Two and Four" Limited Warranty - Two years 100% parts, labor, & freight on canopy, four years 100% parts, labor, and freight on motor, electronics, roller & hardware. Warranty covers manufacturer's defects only. Wind and rain damage are not covered.

A red flashing or rotating light located in the driving compartment shall be illuminated automatically whenever the vehicles parking brake is not fully engaged, indicating that the awning is not in stowed position, as required by NFPA 1900.

- The Firesist HUV awning fabric color shall be red (#88003-000).

The specified awning above shall be recess mounted into upper body side. An aluminum box enclosure shall be fabricated and recessed into upper body side for awning mounting and painted same color as upper body. The recessed awning shall add approximately 1.5" to body width.

AWNING HOUSING COLOR

The awnings standard white housing color shall be re-painted to match upper body color.

LOW VOLTAGE ELECTRICAL SYSTEM- 12 VDC

General

Any low voltage electrical systems or warning devices installed on the fire apparatus shall be appropriate for the mounting location and intended electrical load.

Where wire passes through sheet metal, grommets shall be used to protect wire and wire looms. Electrical connections shall be with double crimp water-tight heat shrink connectors.

All 12 VDC wiring running from front to back of vehicle body shall be run in full length electrical wiring raceway down each side of body.

Wiring

All electrical circuit feeder wiring supplied and installed by the fire apparatus manufacturer shall meet the requirements of NFPA Chapter 10.

The circuit feeder wire shall be stranded copper or copper alloy conductors of a gauge rated to carry 125% of the maximum current for which the circuit is protected. Voltage drops in all wiring from the power source to the using device shall not exceed 10%. The use of star washers for circuit ground connections shall not be permitted.

All circuits shall otherwise be wired in conformance with SAE J1292, *Automobile, Truck, Truck-Tractor, Trailer, and Motor Coach Wiring*.

Wiring and Wire Harness Construction

All insulated wire and cable shall conform to SAE J1127, *Low Voltage Battery Cable*, or SAE J1128, *Low Voltage Primary Cable*, type SXL, GXL, or TXL.

All conductors shall be constructed in accordance with SAE J1127 or SAE J1128, except where good engineering practice dictates special strand construction. Conductor materials and stranding, other than copper, shall be permitted if all applicable requirements for physical, electrical, and environmental conditions are met as dictated by the end application. Physical and dimensional values of conductor insulation shall be in conformance with the requirements of SAE J1127 or SAE J1128, except where good engineering practice dictates special conductor insulation. The overall covering of conductors shall be moisture-resistant loom or braid that has a minimum continuous rating of 194°F (90°C) except where good engineering practice dictates special consideration for loom installations exposed to higher temperatures. The overall covering of jacketed cables shall be moisture resistant and have a minimum continuous temperature rating of 194°F (90°C), except where good engineering practice dictates special consideration for cable installations exposed to higher temperatures.

All wiring connections and terminations shall use a method that provides a positive mechanical and electrical connection. The wiring connections and terminations shall be installed in accordance with the device manufacturer's instructions. All ungrounded electrical terminals shall have protective covers or be in enclosures. Wire nut, insulation displacement, and insulation piercing connections shall not be used.

Wiring shall be restrained to prevent damage caused by chafing or ice buildup and protected against heat, liquid contaminants, or other environmental factors.

Wiring shall be uniquely identified at least every 2 ft (0.6 m) by color coding or permanent marking with a circuit function code. The identification shall reference a wiring diagram.

Circuits shall be provided with properly rated low voltage over-current protective devices. Such devices shall be readily accessible and protected against heat in excess of the over-current device's design range, mechanical damage, and water spray. Circuit protection shall be accomplished by utilizing fuses, circuit breakers, fusible links, or solid state equivalent devices.

If a mechanical-type device is used, it shall conform to one of the following SAE standards:

- 1) SAE J156, *Fusible Links*
- 2) SAE J553, *Circuit Breakers*
- 3) SAE J554, *Electric Fuses (Cartridge Type)*
- 4) SAE J1888, *High Current Time Lag Electric Fuses*
- 5) SAE J2077, *Miniature Blade Type Electrical Fuses*

Switches, relays, terminals, and connectors shall have a direct current (dc) rating of 125% of maximum current for which the circuit is protected.

Power Supply

A 12 V or greater electrical alternator shall be provided. The alternator shall have a minimum output at idle to meet the minimum continuous electrical load of the vehicle, at 200°F (93°C) ambient temperature within the engine compartment, and shall be provided with full automatic regulation.

Minimum Continuous Electrical Load

The minimum continuous electrical load shall consist of the total amperage required to simultaneously operate the following in a stationary mode during emergency operations:

- 1) The propulsion engine and transmission
- 2) All legally required clearance and marker lights, headlights, and other electrical devices except windshield wipers and four-way hazard flashers
- 3) The radio(s) at a duty cycle of 10 percent transmit and 90% receive (for calculation and testing purposes, a default value of 5 A continuous)
- 4) The lighting necessary to produce 2 fc (20 lx) of illumination on all walking surfaces on the apparatus and on the ground at all egress points onto and off the apparatus, 5 fc (50 lx) of illumination on all control and instrument panels, and 50 percent of the total compartment lighting loads
- 5) The minimum optical warning system, where the apparatus is blocking the right-of way
- 6) The continuous electrical current required to simultaneously operate any fire pumps, aerial devices, and hydraulic pumps
- 7) Other warning devices and electrical loads defined by the purchaser as critical to the mission of the apparatus

If the apparatus is equipped to tow a trailer, an additional 45 A shall be added to the minimum continuous electrical load to provide electrical power for the federally required clearance and marker lighting and the optical warning devices mounted on the trailer.

The condition of the low voltage electrical system shall be monitored by a warning system that provides both an audible and a visual signal to persons on, in, or near the apparatus of an impending electrical system failure caused by the excessive discharge of the battery set.

The charge status of the battery shall be determined either by direct measurement of the battery charge or indirectly by monitoring the electrical system voltage.

If electrical system voltage is monitored, the alarm shall sound if the system voltage at the battery or at the master load disconnect switch drops below 11.8 V for 12 V nominal systems, 23.6 V for 24 V nominal systems, or 35.4 V for 42 V nominal systems for more than 120 seconds.

A voltmeter shall be mounted on the driver's instrument panel to allow direct observation of the system voltage.

Electromagnetic Interference

Electromagnetic interference suppression shall be provided, as required, to satisfy the radiation limits specified in SAE J551/1, *Performance Levels and Methods of Measurement of Electromagnetic Compatibility of Vehicles, Boats (up to 15 m), and Machines (16.6 Hz to 18 GHz)*.

Wiring Diagram

A complete electrical wiring schematic of actual system shall be provided with finished apparatus. Similar or generic type electrical schematics shall NOT BE ACCEPTABLE.

Low Voltage Electrical System Performance Test

A low voltage electrical system test certification shall be provided with delivered apparatus.

12 VOLT MULTIPLEX CONTROL CENTER

The apparatus shall be equipped with a Weldon V-MUX multiplexed 12 volt electrical system that will provide complete diagnostic capability, No Exception. The system shall have the capability of delivering multiple signals via a CAN bus, utilizing specifications set forth by SAE J1939. The system shall be node based to maximize stability so that failure of one node does not affect the operation of the other nodes. The system shall use shielded twisted-pair wire for transmission of system function signals. The shielded wire shall provide protection against EMI and RFI noise interruptions.

The multiplex system shall be responsible for providing power management functions as well as load shedding. The warning light system shall be controlled by the multiplex system. The system shall be capable of displaying text and/or graphic messages on a display module. The system shall be based on solid-state technology and shall include self-contained diagnostic indicators.

WELDON CERTIFICATION

A letter shall be provided with bid submittal that the Contractor has successfully completed the Weldon training requirements for Level 1 of the V-MUX Certified Supplier Program and is authorized to design, build, and service V-MUX electrical systems.

The apparatus shall be equipped with a Weldon V-MUX multiplexed 12 volt electrical system that will provide complete diagnostic capability, No Exception. The system shall have the capability of delivering multiple signals via a CAN bus, utilizing specifications set forth by SAE J1939. The system shall be node based to maximize stability so that failure of one node does not affect the operation of the other nodes. The system shall use shielded twisted-pair wire for transmission of system function signals. The shielded wire shall provide protection against EMI and RFI noise interruptions.

The multiplex system shall be responsible for providing power management functions as well as load shedding. The warning light system shall be controlled by the multiplex system. The system shall be capable of displaying text and/or graphic messages on a display module. The system shall be based on solid-state technology and shall include self-contained diagnostic indicators.

MULTIPLEX SYSTEM INTERFACE DISPLAY

The Weldon V-MUX Vista IV multiplex system interface display(s) shall be provided by the cab/chassis manufacturer. The full-color Vista interface display allows the user to control warning and scene lighting, HVAC controls (when specified), and view on-board diagnostics including service information. This display has a wide operating temperature range, automatic screen switching in response to current conditions, and a sleep mode option to eliminate night glare. The following features shall be included;

- 800 x 480 resolution
- Four video ports
- Flash updates with USB memory stick
- Display inside and outside temperature (when specified)
- Automatic climate control (when specified)
- 100% Configurable (OEM Level)
- Field re-programmable
- Peer to peer network
- On-board diagnostics / service information
- Colors change to indicate button status
- Video Ready for: Backup camera, Thermal camera, DVD, GPS...

Special VMux programming request: When the driver releases the park brake and a door, pullout step, awning, etc is left open, then a Door Open Detail Screen needs to pop up on the Vista. The driver will have the option to tap the screen to make the pop-up go away, and acknowledge he is putting the vehicle at risk, or find and correct the open door, pullout step, awning, etc.

BATTERY SYSTEM

Any body builder supplied battery connections shall be heavy duty type with cables terminating in heat shrink loom. Heavy duty battery cables shall provide maximum power to the electrical system. Where required, the cables shall be shielded from exhaust tubing and the muffler. Large rubber grommets shall be provided where cables enter the battery compartment.

Where an enclosed battery compartment is provided, it shall be ventilated to the exterior to prevent the buildup of heat and explosive fumes. The batteries shall be protected against vibration and temperatures that exceed the battery manufacturer's recommendation.

BATTERY SWITCH

One (1) battery disconnect switch shall be provided in cab located within easy reach of driver with green indicator light that is visible from the driver's position. The switch and indicator light shall be supplied and installed by the cab/chassis manufacturer.

BATTERY SOLENOID

Battery switch shall consist of a minimum 200 ampere, constant duty solenoid to feed from positive side of battery.

BATTERY CONDITIONER

The battery conditioner shall be supplied and installed by the cab chassis manufacturer.

SHORE POWER INLET

The shore power inlet for battery conditioner shall be supplied and installed by the cab chassis manufacturer.

- The shore power plug shall be located near the Driver door area.

BODY MOUNTED 360 CAMERAS

The cab chassis provided three (3) FRC Seon series 360 cameras shall be installed on the sides and rear of the body. Camera system shall be calibrated and operational upon delivery.

TAIL LIGHTS

Rear body tail lights shall be vertically mounted and located per Federal Motor Vehicle Safety Standards, FMVSS and Canadian Motor Vehicle Safety Standards CMVSS. The following lights shall be furnished;

- Two (2) Federal amber LED QL64Z-ARROW turn signal lights
- Two (2) Federal red LED QL64Z-BTT stop/tail lights
- Two (2) Federal white LED QL64Z-BACKUP back-up lights

Each light shall have a chrome flange.

MIDSHIP MARKER/TURN SIGNAL

Two (2) Whelen model T0A00MAR 2" round amber LED midship body clearance marker/turn signal lights shall be provided and installed, one (1) light on each side of the body, in forward wheel well of rear axle. Midship marker/turn lights shall be wired to the headlight circuit of the chassis.

MARKER LIGHTS

The body shall be equipped with all necessary side and rear clearance lights and reflectors in accordance with Federal Motor Vehicle Safety Standards (FMVSS) and Canadian Motor Vehicle Safety Standards (CMVSS). Clearance lights on body shall be connected to the clearance light circuit of the chassis.

LICENSE PLATE LIGHT

One (1) Arrow #437 chrome plated LED license plate light shall be installed on the rear of the body. License plate light shall be wired to the headlight circuit of chassis. A fastener system shall be provided for license plate installation.


FORWARD CAB SIDE ROOF SCENE LIGHTS

The following front scene lights shall be mounted on the forward cab roof sides of the chassis above windshield.

CUSTOMER REQUESTS THE HIVIZ CAB ROOF SCENE LIGHTS AND BROW LIGHT BE TESTED AND PHOTOS PROVIDED TO VERIFY THERE ARE NO GAPS IN THE LIGHT PATTERN BETWEEN THE BROW, CAB ROOF CORNER AND CAB ROOF SIDE SCENE LIGHTS PRIOR TO INSTALLATION.

Forward Side of Cab Roof Scene VDC:Hi Viz

The front of the cab shall include two (2) HiViz model FireTech FT-MB-15-FT-B LED, 15 LED Mini Brow, 20" in length, combination 10 degree spot and 60 degree flood optic configuration in a black housing. The scene lights shall be mounted on the forward cab roof sides of the chassis above the windshield. See picture below for reference.

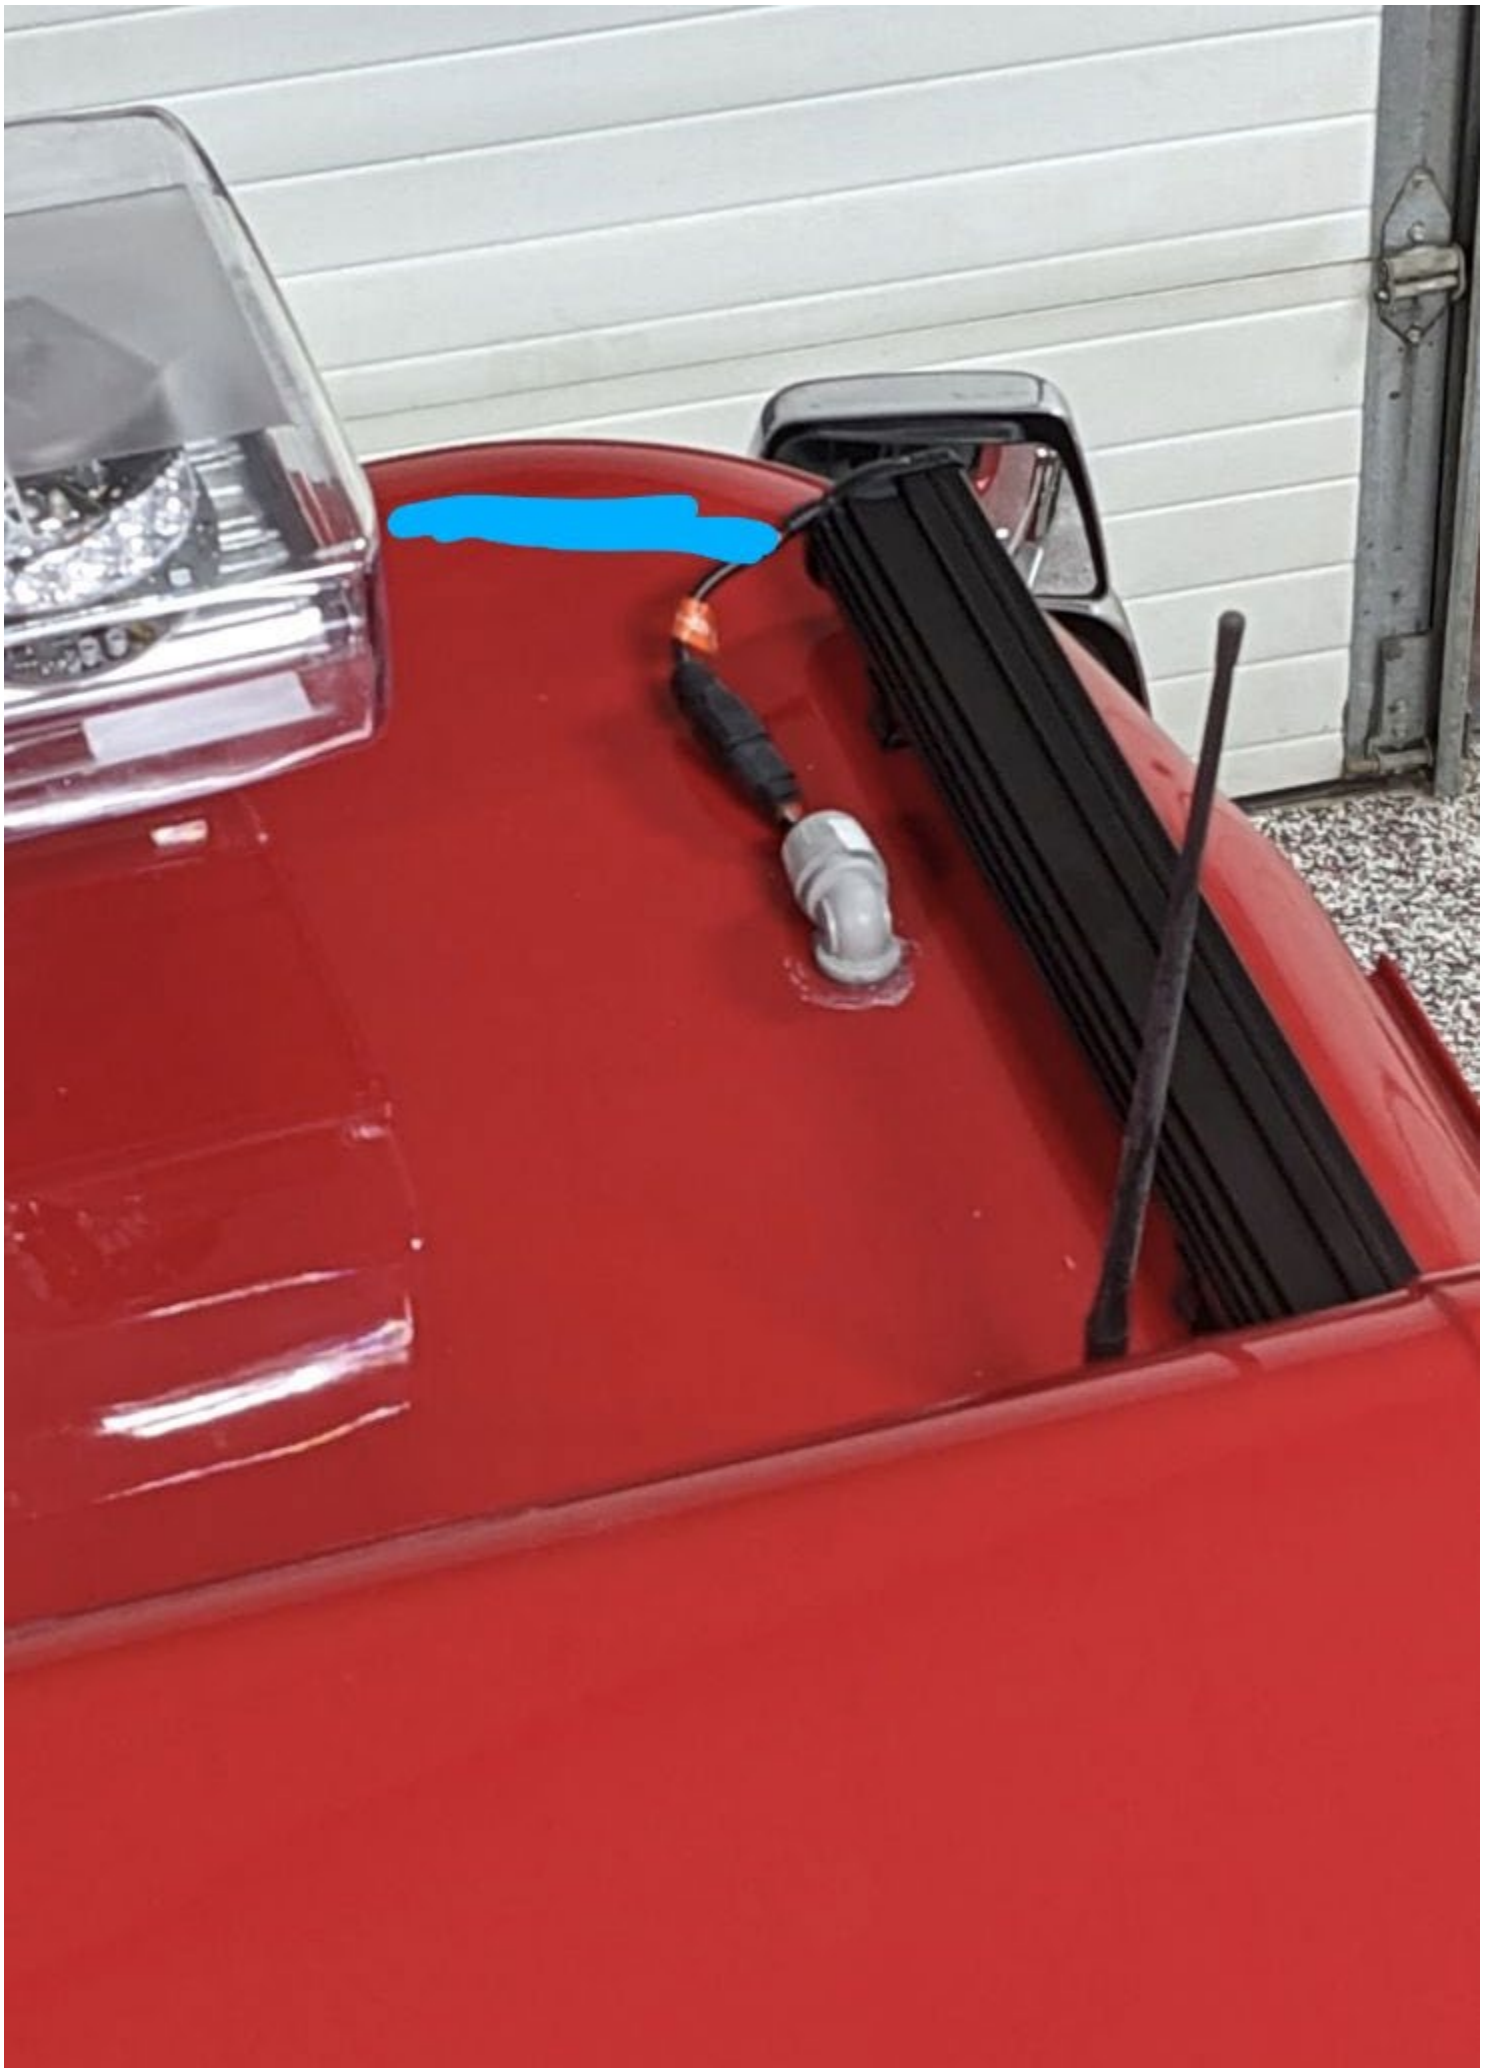

The lights shall be controlled at the multiplex display(s) in the cab.

FORWARD CAB ROOF CORNERS SCNE LIGHTS

The following front scene lights shall be mounted on the chassis forward cab roof corners between the lightbar and forward cab roof side scene lights to fill the lighting gap between the side scenes and the brow light.

CUSTOMER REQUESTS THE HIVIZ CAB ROOF SCENE LIGHTS AND BROW LIGHT BE TESTED AND PHOTOS PROVIDED TO VERIFY THERE ARE NO GAPS IN THE LIGHT PATTERN BETWEEN THE BROW, CAB ROOF CORNER AND CAB ROOF SIDE SCENE LIGHTS PRIOR TO INSTALLATION.

The front of the cab forward roof corners shall include one (1 each side) HiViz model FireTech FT-WL-2000-FT-B LED scene lights: 2000 lumen LED work light. 10 and 60 degree spot and flood optic configuration in a Black housing provided and installed on the forward cab roof corners between the cab roof side scene lights and brow light to fill any lighting gap facing forward.

The scene light shall be powered by the 12 VDC electrical system.

See picture (Blue Line on roof corner) for placement.



The lights shall be controlled at the multiplex display(s) in the cab.

SIDE SCENE LIGHTS

There shall be four (4) Fire Research Spectra Max model SPA260-Q20 surface mount LED light(s) provided on the upper body. Light quantity shall be divided equally per side. The light(s) shall be mounted with four (4) screws to a flat surface. It shall be no more than 6" high by 14 1/2" wide and have a profile of less than 1 3/4" beyond the mounting surface. Wiring shall extend from the electronics box at the rear of the lamphead. Lamphead shall be provided with white powder coat finish with chrome bezel.

The lamphead shall have sixty (60) ultra-bright white LEDs, 56 for flood lighting and 4 to provide a spot light beam pattern. It shall operate at 12 volts DC, draw 13.8 amps, and generate 20,000 lumens of light. The lamphead shall have a unique lens that directs flood lighting onto the work area and focuses the spot light beam into the distance.

Lamphead shall be provided with a lifetime warranty to original apparatus purchaser.

The lights shall be controlled at the multiplex display(s) in the cab.

Floodlight housing shall be white.

REAR SCENE LIGHTS

There shall be two (2) Fire Research Spectra Max model SPA260-Q20 surface mount LED lights installed, one (1) per side in the upper rear portion of the body. The light(s) shall be mounted with four (4) screws to a flat surface. It shall be no more than 6" high by 14 1/2" wide and have a profile of less than 1 3/4" beyond the mounting surface. Wiring shall extend from the electronics box at the rear of the lamphead.

The lamphead shall have sixty (60) ultra-bright white LEDs, 56 for flood lighting and 4 to provide a spot light beam pattern. It shall operate at 12 volts DC, draw 13.8 amps, and generate 20,000 lumens of light. The lamphead shall have a unique lens that directs flood lighting onto the work area and focuses the spot light beam into the distance. The lamphead housing shall be powder coated white with chrome bezel.

The above scene lights shall light to a level of at least 3 fc (30 lx), measured at 25 equally spaced points on a 2.5 ft (750 mm) grid with in a 10 ft x 10 ft (3 m x 3m) square to the rear of vehicle.

Lamphead shall be provided with a lifetime warranty to original apparatus purchaser.

The lights shall be controlled at the multiplex display(s) in the cab.

The rear scene lights shall also be activated when the apparatus is in reverse.

Floodlight housing shall be white.

TRAFFIC DIRECTIONAL LIGHT

One (1) Federal Signal, split model CNSMJ2X4RP3C LED Traffic Directional Light shall be installed on the apparatus. The traffic directional light shall (6) Amber and (2) Red LED reflectors, with interface module. The directional light becomes emergency flash active with the EMaster in the V-Mux. There will be brake light activation for the two (2) red lights when the unit is in transit.

The control shall be in the Vmux and shall be a multifunction button. It shall activate automatically with Emaster and shall have off/center/left/right for the multifunction button in the mux.

ORDER: CNSMJ2X4RP3C and Z858303641A

WARNING LIGHT PACKAGE

Each apparatus shall have a system of optical warning devices that meets or exceeds the requirements of this section.

The optical warning system shall consist of an upper and a lower warning level. The requirements for each level shall be met by the warning devices in that particular level without consideration of the warning devices in the other level.

For the purposes of defining and measuring the required optical performance, the upper and lower warning levels shall be divided into four (4) warning zones. The four zones shall be determined by lines drawn through the geometric center of the apparatus at 45 degrees to a line drawn lengthwise through the geometric center of the apparatus. The four (4) zones shall be designated A, B, C, and D in a clockwise direction, with zone A to the front of the apparatus.

Each optical warning device shall be installed on the apparatus and connected to the apparatus's electrical system in accordance with the requirements of this standard and the requirements of the manufacturer of the device.

A master optical warning system switch that energizes all the optical warning devices shall be provided.

The optical warning system on the fire apparatus shall be capable of two (2) separate signaling modes during emergency operations. One (1) mode shall signal to drivers and pedestrians that the apparatus is responding to an emergency and is calling for the right-of-way. One (1) mode shall signal that the apparatus is stopped and is blocking the right-of-way. The use of some or all of the same warning lights shall be permitted for both modes provided the other requirements of this chapter are met.

A switching system shall be provided that senses the position of the parking brake or the park position of an automatic transmission. When the master optical warning system switch is closed and the parking brake is released or the automatic transmission is not in park, the warning devices signaling the call for the right-of-way shall be energized. When the master optical warning system switch is closed and the parking brake is on or the automatic transmission is in park, the warning devices signaling the blockage of the right-of-way shall be energized. The system shall be permitted to have a method of modifying the two (2) signaling modes.

The optical warning devices shall be constructed or arranged so as to avoid the projection of light, either directly or through mirrors, into any driving or crew compartment(s). The front optical warning devices shall be placed so as to maintain the maximum possible separation from the headlights.

Steadily burning, non flashing optical sources shall be permitted to be used.

Control System: Federal Signal

UPPER LEVEL OPTICAL WARNING DEVICES

The upper-level optical warning devices shall be mounted as high and as close to the corner points of the apparatus as is practical to define the clearance lines of the apparatus. The upper-level optical warning devices shall not be mounted above the maximum height, specified by the device manufacturer.

ZONE A - FRONT WARNING LIGHTS

See Chassis Modification section for cab mounted warning lights.

ZONE B & D - SIDE WARNING LIGHTS

There shall be four (4) Federal Signal QL97 LED Light(s) provided, two (2) each side. The light head shall include twenty-six (26) programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

- Red LEDs
- Clear Lens

Each light shall have a chrome flange.

- Flash Pattern shall be Federal Signal DoubleFlash 150 - Simultaneous

The lights shall be controlled at the multiplex display(s) in the cab.

ZONE C - REAR WARNING LIGHTS

There shall be two (2) Federal Signal QL97 LED Light(s) provided, one (1) each side **on the upper rear body face**. The light head shall include twenty-six (26) programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

Drivers Side Upper Zone C

- Amber LED's
- Clear Lens

Officers Side Upper Zone C

- Red LEDs
- Clear Lens

Each light shall have a chrome flange.

- Flash Pattern shall be Federal Signal DoubleFlash 150 - Simultaneous

The lights shall be controlled at the multiplex display(s) in the cab.

LOWER LEVEL OPTICAL WARNING DEVICES

To define the clearance lines of the apparatus, the optical center of the lower-level optical warning devices in the front of the vehicle shall be mounted on or forward of the front axle centerline and as close to the front corner points of the apparatus as is practical.

The optical center of the lower-level optical warning devices at the rear of the vehicle shall be mounted on or behind the rear axle centerline and as close to the rear corners of the apparatus as is practical. The optical center of any lower-level device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground for large apparatus, and 18 in. and 48 in. (460 mm and 1600 mm) above level ground.

A midship optical warning device shall be mounted right and the left sides of the apparatus if the distance between the front and rear lower-level optical devices exceeds 25 ft (7.6 m) at the optical center. Additional midship optical warning devices shall be required, where necessary, to maintain a horizontal distance between the centers of adjacent lower-level optical warning devices of 25 ft (7.6 m) or less. The optical center of any midship mounted optical warning device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground.

ZONE A - FRONT WARNING LIGHTS, LOWER

ZONES B AND D - BODY LIGHT (BODY WHEELWELL AREA)

There shall be two (2) Federal Signal QL64 LED Light(s) provided, one (1) each side. The light head shall include twenty-six (26) programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

- Red LEDs
- Clear Lens

Each light shall have a chrome flange.

- Flash Pattern shall be Federal Signal DoubleFlash 150 - Simultaneous

The lights shall be controlled at the multiplex display(s) in the cab.

ZONES B AND D - BODY INTERSECTOR LIGHT (BODY REAR CORNERS)

There shall be two (2) Federal Signal QL64 LED Light(s) provided, one (1) each side. The light head shall include twenty-six (26) programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

- Red LEDs
- Clear Lens

Each light shall have a chrome flange.

- Flash Pattern shall be Federal Signal DoubleFlash 150 - Simultaneous

The lights shall be controlled at the multiplex display(s) in the cab.

ZONE C - REAR WARNING LIGHTS (LOWER REAR CORNERS)

There shall be two (2) Federal Signal QL64 LED Light(s) provided, one (1) each side. The light head shall include twenty-six (26) programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

- Red LEDs
- Clear Lens

Each light shall have a chrome flange.

- Flash Pattern shall be Federal Signal DoubleFlash 150 - Simultaneous

The lights shall be controlled at the multiplex display(s) in the cab.

LINE VOLTAGE ELECTRICAL SYSTEM

PTO GENERATOR

The vehicle shall be equipped with a Marathon PTO generator system with a capacity of 25,000 watts at 120/240 VAC, 208/104 amps, single phase. Current frequency shall be stable at 60 hertz.

The transmission's PTO port and PTO, or the split shaft PTO, and all associated drive shaft components shall be rated to support the continuous duty torque requirements of the generator's continuous duty rating as stated on the power source nameplate.

Where the generator is driven by the chassis engine and transmission through a split shaft PTO, the driving compartment speedometer shall register when the generator drive system is engaged.

Where the generator is driven by the chassis engine and transmission through a split shaft PTO and a chassis transmission retarder is furnished, it shall be automatically disengaged for generator operations.

The direct drive generator shall be mounted so that it does not change the ramp break over angle, angle of departure, or angle of approach as defined by other components, and it shall not extend into the ground clearance area.

The direct drive generator shall be mounted away from exhaust and muffler areas or provided with a heat shield to reduce operating temperatures in the generator area.

GENERATOR BONDING

A minimum of four (4) 16" x 2 gauge copper ground straps shall be bolted to body sub-frame and chassis sub-frame for proper bonding of high voltage system. The conductor shall have a minimum amperage rating, as defined in 310.15, "Ampacities for Conductors Rated 0–2000 Volts," of *NFPA 70*, of 115 percent of the rated amperage on the power source specification label.

GENERATOR ENGAGEMENT

A "Generator Engaged" indicator shall be provided in the driving compartment to indicate that the generator shift has been successfully completed.

An "OK to Operate Generator" indicator shall be provided in the driving compartment to indicate that the generator is engaged (if not always engaged), the transmission is in the proper gear (if required, automatic transmissions only), and the parking brake is engaged (if applicable).

An interlock system shall be provided to prevent advancement of the engine speed in the driving compartment or at any operator's panel unless the parking brake is engaged, and the transmission is in neutral or the output of the transmission is correctly connected to a pump or generator instead of the drive wheels.

WARRANTY PERIOD

Provided such goods are operated and maintained in accordance with written instructions, this generator warrants that the PTO generators shall be free from defects in material and workmanship for a period of five (5) years or one thousand (1,000) hours, whichever comes first, from the date of delivery to the first purchaser.

GENERATOR CONTROL

The generator shall be engaged at the switch panel in the cab.

GENERATOR MOUNTING

The generator shall be mounted below the chassis frame rails. The generator mounting brackets shall be fabricated using steel plate and/or tubing and powder coat primed and painted black. The generator mounting shall be bolted to the side of the chassis frame rail and removable so that the generator can be lowered from under apparatus for service, if necessary. The generator case shall not extend below the bottom edge of the apparatus body.

MANUALS AND SCHEMATICS

Two (2) complete manuals on parts list, maintenance, wiring schematics, hydraulic schematics, circuit boards, voltage regulator board and other components shall be provided on delivery.

POWER-TAKE-OFF GENERATOR DRIVE

There shall be a "Hot Shift" power-take-off (PTO) installed on the transmission PTO opening of the chassis. The "Hot Shift" PTO is provided to allow the engagement of the PTO at higher engine RPM speeds. The PTO output shall be connected to the generator through hollow tube type driveline with heavy duty universals.

The engagement of the PTO shall be in the chassis cab with a rocker switch and red pilot light to note engagement of the PTO or via the V-Mux screen if so equipped.

The power supply to the PTO engagement control shall be wired to the parking brake and a neutral position transmission switch to prevent engagement unless the vehicle is stopped and transmission has been placed in neutral.

The installation of the engine, transmission, driven accessories (power takeoffs (PTO), etc.) shall meet the engine and transmission manufacturers' installation recommendations for the service intended.

Model part number shall be Chelsea 280 series.

ENGINE SPEED CONTROL

An engine speed auxiliary control device (high idle switch or throttle) shall be installed to maintain a stable cycle output from generator when the apparatus is parked.

An interlock shall prevent the operation of the engine speed auxiliary control device unless the parking brake is engaged and the transmission is in neutral or park, or the parking brake is engaged and the engine is disengaged from the drive wheels.

The engine shall be prevented from regulating its own engine speed during times when engine rpm control is critical for consistent apparatus functions such as generator, water pump, or aerial operation.

LOADCENTER

The loadcenter shall be an Eaton BR Series specifically designed for protection and distribution of AC line voltage such as lighting and small motor branch circuits. The loadcenter enclosure is made of 16 gauge galvanized sheet steel with a galvanized coating provided for corrosion protection. All trims used on BR loadcenters are chromate sealed and finished

with an electro-disposition epoxy paint (ANSI-61) which exceeds requirements for outdoor and indoor applications. A combination surface/flush cover with integral door is supplied with indoor loadcenters rated from 100 through 400 amperes. All plug-in loadcenters are CSA listed to file LL98266. CSA Certified to C22.2 No.29, to loadcenter type and CSA listing.

GENERATOR MONITORING PANEL

An Accuenergy Acuvim II multifunction power and energy meter shall be provided to properly monitor the generator performance and load demand during operation. The Accuenergy Acuvim CL includes a digital RS485 communication port running Modbus protocol. The electrical parameters can be viewed on a backlit LCD screen. Unit shall be capable of displaying the following;

- Generator frequency in hertz
- Line 1 current in amperes
- Line 2 current in amperes
- Generator voltage in volts
- Meter running time

SHORE POWER INLET - BATTERY CHARGER

The above mentioned shore power inlet, and battery conditioner shall be specified in the 12 volt section.

120/240 VAC OUTLETS AND CIRCUITS

The generator and or shore power shall supply the 120/240 volt electrical equipment and outlets outlined below. Proper circuit protection shall be installed as noted:

LINE VOLTAGE ELECTRICAL SYSTEM

All components, equipment, and installation procedures shall conform to *NFPA 70, National Electrical Code*, except where superseded by the requirements of this chapter. Where the requirements of this chapter differ from those in *NFPA 70*, the requirements in this chapter shall apply.

Receptacle Label

Each receptacle shall be marked with a label indicating the nominal line voltage (120 volts or 240 volts) and the current rating in amps of the circuit. If the receptacle is DC or other than single phase, that information shall also be marked on the label.

All receptacles and electrical inlet devices shall be listed to UL 498, *Standard for Safety Attachment Plugs and Receptacles*, or other recognized performance standards.

Receptacles used for DC voltages shall be rated for DC service.

Wiring Schematics

An "As-Built" Wiring diagrams for line voltage systems shall be provided to include the following information;

- (a) Pictorial representations of circuit logic for all electrical components and wiring
- (b) Circuit identification
- (c) Connector pin identification

- (d) Zone location of electrical components
- (e) Safety interlocks
- (f) Alternator–battery power distribution circuits
- (g) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems

LIGHT TOWER

One (1) Command Light Knight 2, KL Series light tower(s) shall be provided and installed on the completed unit.

The Command Light shall be covered by a five (5) year limited warranty from defects in materials and workmanship. An operation, maintenance, and parts manual shall be provided with the completed unit.

Light Tower Construction and Design

The Command Light assembly shall be of aluminum construction, with stainless steel shafts and bronze bushings for long life and low maintenance.

The electrically controlled unit shall not require usage of the vehicle's air supply for operation, thereby eliminating the chance for air leaks in the vehicle braking system. Hydraulic or pneumatic type floodlights are not acceptable alternatives to the specified all electric light tower.

The light tower shall be tested to in wind conditions of 90 mph (150 kph) minimum. Other type floodlights that have not been tested to these conditions are not acceptable.

The light tower shall be capable of overhanging the side or back of the vehicle to provide maximum illumination to the vicinity adjacent to the vehicle for the safety of emergency personnel in high traffic conditions. Any tower that is only capable of rotations at the top of a pole is not an acceptable alternative to the specified tower.

Light Tower Electrical System

The light tower shall be a two-stage articulating device with a lighting bank on top of the second stage capable of continuous 360 degree rotation. The light shall be elevated by electric linear actuators, one (1) actuator shall elevate the light bank and one (1) actuator shall adjust the light bank angle from 0 to 110 degrees. Power for the light bank shall be supplied through power collecting rings thus allowing continuous 360 degree rotation in either direction.

The tower base shall have a light that illuminates the envelope of motion during any movement of the light tower mast per NFPA 1900.

A red flashing or rotating light located in the driving compartment shall be illuminated automatically whenever the vehicles parking brake is not fully engaged, indicating that the light tower is not in stowed position, as required by NFPA 1900.

Light Tower Floodlights

The Command Light model KL415A-FX shall be equipped with the following bank of floodlights:

Floodlight manufacturer: FRC
Number of lamp heads: Six (6) Spectra SPA100-K28
Voltage: 120 volts
Watts of each lamp head: 335 watt
Total watts of light tower: 2,010 watts
Total Lumens: 168,000
Configuration: The light heads shall be mounted with three (3) on each side of the light tower, giving two (2) vertical lines of three (3) when the lights are in the upright position

Light Tower Strobe Indicator

The floodlight tower shall have a strobe indicator located on the top of the upper section.

The lens color for the strobe light shall be blue.

Light Tower Backlight Option

A backlight option shall be provided on the light tower. The lower pair of light heads shall be capable of being rotated about a horizontal axis 180 degree, providing light down on the vehicle or to the opposite side of the vehicle while allowing the fixed lights to remain pointed at the scene.

The hand-held remote control shall have an additional switch supplied for the backlight rotation option.

Light Tower Paint

The light tower shall be electro-statically powder coated with a hammer tone gray color.

Light Tower Controls

The light tower(s) shall be operated with a hand-held 15-foot umbilical line remote control. The storage station for the remote control unit shall be equipped with a button to activate the "Auto-Park" automatic nesting feature. The remote control shall be located per the itemized compartment list and include;

Three (3) switches; one (1) for each pair of lights.

One (1) switch for light bank rotation.

One (1) switch for elevating lower stage.

One (1) switch for elevating upper stage.

One (1) switch for optional light bank rotation.

One (1) switch for the optional strobe.

One (1) indicator light to indicate when light bank is out of the roof nesting position.

One (1) indicator light to indicate when light bank is rotated to proper nesting position.

Light Tower Mounting

The light tower shall be mounted to roof of the custom cab which shall be reinforced as necessary to support weight of the light tower.

Where the light tower is to be mounted above a finished walk-in area; the roof backing plates and structure shall have threaded holes to allow removal of light tower without removal of the interior paneling.

Where the light tower is mounted in close proximity to other roof mounted items (i.e. antennas, air conditioners, and weather stations) the light tower shall be orientated in order to help prevent a operator driven collision.

TREE LIMB GUARD

A three-sided tree limb guard shall be provided fabricated from 1/8" smooth aluminum and painted to match the upper paint color to provide protection to the specified roof mounted equipment from small tree branches.

UTILITY AIR SYSTEM

The completed vehicle shall be provided with a Boss Industries, model 8060-UBI, air compressor rated at 160 CFM @ 110 PSI continuously. The air compressor shall be mounted below chassis frame area and be PTO driven using transmission mounted PTO system. The remote air intake shall be routed through the front rescue body compartmentation to body roof area to minimize intake of dust and debris during operation. An on/off switch shall be provided in cab that will automatically increase engine RPM for maximum air compressor output.

Air compressor system shall have the following features:

- Boss oil flooded, rotary screw air end designed to produce up to 185 CFM @ 110 PSIG continuously.
- Side-by-side gear set incorporated into air-end to achieve conservative engine speeds and greatest ground clearance.
- Two year, unlimited hour, warranty on the air-end.
- Remote mount horizontal oil receiver tank with filler port, lubricant level sight glass and environmentally shielded electronic oil level sender. Exterior shell of vessel to be welded, so as to be one piece. Tank assembly to be attached to frame with easy mount "J" bolts. Tank must be ASME approved.
- Air/oil manifold to include;
 - All electric switches (except oil level), senders, minimum pressure orifice, regulator, and compressor blow down valve.
 - Self-contained separator element capable of 195 CFM @ 295 PSI with easy spin-on housing.
 - Replaceable spin-on compressor lubricant filter with safety bypass and 25-micron rating.
- Engine speed and air inlet controls for automatic modulation of engine speed to match air demand. Engine speed control to interface with the chassis manufactures recommended ECU (Electronic Control Unit). Foot pedal rheostat interface not acceptable.
- Remote mount, self contained, aerodynamically designed cooling package. Venturi housing to be single piece formed ABS plastic.
- Remote mount two-stage, dry-type air intake filter with replaceable filter and gravity evacuator
- Digital instrument panel to include;
 - **General features;** Three (3) bar graph LEDs for monitoring compressor discharge temperature, compressor system pressure and compressor oil level. Eight (8) diagnostic LED indicator lights, one (1) LED hour meter and four (4) seamless push button safety and maintenance buttons.
 - **Safety features;** LED compressor over temperature, high pressure, low oil shutdown indicator lights, an emergency stop button and compressor re-set button.
 - **Diagnostic/ Maintenance features;** Sender fault indicators to activate safety shutdown, LED mode indicating hour meter, test mode to detect faulty system wiring, filter minder LED lights for air filter, oil filter and compressor separator element replacement, check oil level push button, detailed system shutdown memory reviewer, fan LED indicator light to indicate fan operation and regulated air LED indicator light.
- Boss interface module: Pre-wired electronic wiring to main Boss harness to simplify and minimize customer interface connections to engine transmission and PTO.
- Color coded and size differentiated plastic control line tubing, fittings, hoses, single integrated weather-sealed wiring harness for Boss compressor system and hardware necessary for standard installation and operation.

- Necessary warning and information decals.
- Operations, parts and maintenance manual.

Clarification: System to be powered on / off via a Rocker Switch ILO Vista/VMUX

- Controls for utility air compressor shall be located in lower Compartment S1.
- Utility air compressor discharge shall be located in a cast aluminum box located at rear body panel.

One (1) 3/4" Gladhands air connection fitting shall be provided for utility air outlet. A 1/4 turn on/off valve shall be provided in an adjacent to outlet.

- One (1) Schrader type air fitting(s) with a quick connect valveshall be provided for utility air outlet.

Results of the NFPA required utility air system test shall be provided with delivered vehicle.

POWER-TAKE-OFF GENERATOR DRIVE

There shall be a "Hot Shift" power-take-off (PTO) installed on the transmission PTO opening of the chassis. The "Hot Shift" PTO is provided to allow the engagement of the PTO at higher engine RPM speeds. The PTO output shall be connected to the generator through hollow tube type driveline with heavy duty universals.

The engagement of the PTO shall be in the chassis cab with a rocker switch and red pilot light to note engagement of the PTO or via the V-Mux screen if so equipped.

The power supply to the PTO engagement control shall be wired to the parking brake and a neutral position transmission switch to prevent engagement unless the vehicle is stopped and transmission has been placed in neutral.

The installation of the engine, transmission, driven accessories (power takeoffs (PTO), etc.) shall meet the engine and transmission manufacturers' installation recommendations for the service intended.

Model part number shall be Chelsea 280GMFJP-B5XV, 126% Ratio.

CAMERA MAST SYSTEM

No camera and mast system shall be required on completed unit.

EQUIPMENT PAYLOAD WEIGHT ALLOWANCE

In compliance with NFPA 1900 standards, the special service vehicle shall be designed for an equipment loading allowance of 10,000 lbs. of Riverside County Fire Department provided equipment based on a 60,001 pound and up gross vehicle weight rating.

EQUIPMENT

The following equipment shall be furnished with the completed special service vehicle;

- One (1) container of assorted stainless steel nuts, bolts, screws and washers used in the construction of the apparatus shall be provided with the completed apparatus.
- There shall be two (2) Zico SAC-44-E NFPA approved folding aluminum wheel chocks provided for 44" diameter tires that together will hold the vehicle when loaded to its GVWR or GCWR, on a hard surface with a 20 % grade, with the transmission in neutral, and the parking brake released.
 - **The wheel chock(s) shall be mounted behind the rear wheels, below the body, ahead of the pull out step, one (1) on the streetside and one (1) on the curbside.**
- Two (2) Streamlight FireBox LED flashlight(s) with shoulder strap shall be provided be provided with 540/330 lumen output and 7/15 hour run time.. Each flashlight shall be orange in color and have a 12 volt DC charger and vehicle mount kit. Each flashlight shall have a LED E-Spot spotlight style bulbs and reflectors with 2 ultra-bright LED taillights. The flashlight(s) shall be wired to battery direct unless otherwise specified by Riverside County Fire Department.
 - The above specified flashlight(s) shall be shipped loose with the completed unit.

REMAINING NFPA MINOR EQUIPMENT BY PURCHASER

All other minor equipment not specified above, but recommended by NFPA 1900 for special service vehicles section A.8.4 shall be supplied and mounted by Riverside County Fire Department before the unit is placed in emergency service.