

Kremmling Fire Protection District

Medium Rescue

Production Specification

Contents

INTERNET IN-PROCESS SITE	5
VEHICLE STABILITY	5
ROLLOVER STABILITY	5
ROADABILITY	6
SERVICEABILITY	6
CONSTRUCTION DOCUMENTATION	7
OPERATIONS AND SERVICE DOCUMENTATION	8
NFPA REQUIRED DOCUMENTATION FORMAT - CD-ROM	8
CARRYING CAPACITY	9
TESTING	10
ROAD TEST	10
LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST	10
TEST SEQUENCE	10
1. RESERVE CAPACITY TEST	10
2. ALTERNATOR PERFORMANCE TEST	11
TEST AT IDLE	11
TEST AT FULL LOAD	11
3. LOW VOLTAGE ALARM TEST	11
LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST	11
DOCUMENTATION	11
UL 120/240 VAC CERTIFICATION	12
DOCUMENTATION	12
DIELECTRIC VOLTAGE WITHSTAND TEST	13
WARRANTY	13
GENERAL LIMITED WARRANTY - ONE (1) YEAR	13
LOW VOLTAGE ELECTRICAL WARRANTY - FIVE (5) YEARS	13
STRUCTURAL WARRANTY - TEN (10) YEARS	14
PAINT LIMITED WARRANTY - TEN (10) YEARS	14
GRAPHICS LIMITED WARRANTY	14
CONSTRUCTION PERIOD	14
OVERALL HEIGHT	14
OVERALL LENGTH	14
OVERALL WIDTH	14
PRE-CONSTRUCTION CONFERENCE	14
PRE-PAINT CONFERENCE	15
FINAL INSPECTION CONFERENCE	15
APPARATUS DELIVERY	15
CAB CHASSIS SPECIFICATIONS	16
CAB/CHASSIS PREPAYMENT	24
CHASSIS MODIFICATIONS	25
LUBRICATION AND TIRE DATA PLATE	25
VEHICLE DATA PLATE	25
OVERALL HEIGHT, LENGTH DATA PLATE (US)	25
ACCIDENT PREVENTION	26
PERSONNEL CAPACITY	26
ACCIDENT PREVENTION	26
WEARING HELMET WARNING	26
FRONT BUMPER EXTENSION	26
BUMPER GRAVEL SHIELD	26
AIR HORNS	26
MOTOR DRIVEN SIREN	26
SIREN ACTIVATION	26
MECHANICAL SIREN / ELECTRIC HORN SWITCH	27

Kremmling Fire Protection District

Medium Rescue

Production Specification

FRONT MOUNTED WINCH	27
DRIVING LIGHTS	27
FRONT TOW PROVISIONS	27
EXHAUST	27
RADIO/ANTENNA INSTALLATION	27
KNOX BOX INSTALLATION	27
VHF RADIO CHARGER INSTALATION	28
800 Mhz RADIO CHARGER(S)	28
12 VDC ACCESSORY PLUG	28
ROAD TEMPERATURE MEASURING SYSTEM	28
SEAT BELT COLOR	28
SEAT BELT WEB LENGTH - COMMERCIAL CAB	28
SEAT BELT MONITORING AND VEHICLE DATA RECORDER (VDR) SYSTEMS	28
SEAT BELT MONITORING	28
VEHICLE DATA RECORDER (VDR)	29
OCCUPANT RESTRAINT INDICATOR	29
IGNITION KEY	29
SIX (6) – LED TIRE PRESSURE VISUAL INDICATORS	29
HELMET STORAGE	29
CAB CRASH TEST CERTIFICATION	29
CAB MIRRORS, DRIVER ADJUSTABLE	30
ADD LOWER SECOND COLOR	30
PAINT DOOR JAMBS JOB COLOR	30
CHASSIS PAINT WARRANTY	30
CAB STEP AND FUEL TANK COVER	30
BATTERY CHARGING RECEPTACLE	30
BATTERY JUMPER STUDS	30
STEP COMPARTMENT BELOW CREW DOOR	31
MUDFLAPS	31
AIR BRAKE SYSTEM QUICK BUILD-UP	31
ROAD EMERGENCY SAFETY KIT	31
CAB INTERIOR CABINET - CENTER REAR WALL	31
BODY DESIGN	31
EXTERIOR ALUMINUM BODY	32
DRIP RAILS	32
ROOF CONSTRUCTION	33
BODY SUBFRAME	33
BODY MOUNTING	33
12" REAR STEP BUMPER	33
REAR TOW EYES	33
GROUND LIGHTS	34
WHEEL WELL EXTERIOR PANEL	34
DIEFORMED BEADED EDGE BODY FENDERS	34
WHEEL WELL LINERS	34
SPLASH SKIRT	34
SCBA CYLINDER COMPARTMENTS	34
ALUMINUM BODY PAINT SPECIFICATIONS	34
BODY PAINT PREPARATION	34
PAINT PROCESS	35
MACHINE POLISHED	35
PAINT - ENVIRONMENTAL IMPACT	35
PAINT FINISH - SINGLE COLOR	35
BODY UNDERCOATING	35
UNDERCOAT WARRANTY	36

Kremmling Fire Protection District

Medium Rescue

Production Specification

PAINT WARRANTY	36
COMPARTMENT INTERIOR FINISH	36
ROOF COMPARTMENT INTERIOR FINISH	36
REFLECTIVE STRIPE REQUIREMENTS	36
REFLECTIVE STRIPE - CAB SIDE	37
CHEVRON STRIPE - CAB BUMPER	37
REFLECTIVE STRIPE - CAB DOOR INTERIOR	37
REFLECTIVE STRIPE - BODY SIDES	37
CHEVRON REFLECTIVE STRIPE - REAR SIDES PANELS	38
LETTERING	38
SIDE CAB DOOR LETTERING	38
UPPER BODY SIDE LETTERING	38
CUSTOM DECAL LOGO - 12" -18"	38
EXTERIOR COMPARTMENT DOORS	39
ROLL-UP DOOR CONSTRUCTION - ROBINSON (ROM)	39
BODY HEIGHT MEASUREMENTS	40
TWO (2) UPPER BODY COMPARTMENTS (INDIVIDUAL)	40
UPPER BODY WALKWAY	41
WALKWAY/STEP LIGHTS	41
ACCESS LADDER	41
ROOF ACCESS HANDRAIL	41
BODY WIDTH DIMENSIONS	41
STREETSIDE COMPARTMENT - FRONT (S1)	42
STREETSIDE COMPARTMENT - ABOVE REAR WHEELS (S2)	44
STREETSIDE COMPARTMENT - REAR (S3)	45
CURBSIDE COMPARTMENT - FRONT (C1)	46
CURBSIDE COMPARTMENT - ABOVE REAR WHEEL (C2)	48
CURBSIDE COMPARTMENT - REAR (C3)	50
REAR COMPARTMENT - CENTER (RC1)	51
PLASTIC FLOOR AND SHELF TILE	52
ROPE TIE-OFF OR PORTABLE WINCH RECEIVERS	52
LOW VOLTAGE ELECTRICAL SYSTEM- 12 VDC	53
12 VOLT MULTIPLEX CONTROL CENTER	56
WELDON CERTIFICATION	57
MULTIPLEX SYSTEM VISTA IV V-MUX COLOR DISPLAY	57
MULTIPLEX DOWNLOADER AND DIAGNOSTIC KIT	57
CAB CONSOLE	57
BATTERY SYSTEM	58
BATTERY SWITCH	58
BATTERY SOLENOID	58
BATTERY CHARGER	59
One (1) Newmar model EV-20 battery charger shall be provided ideal for charging multiple battery bank systems. The Newmar Phase Three "Smart" battery charging technology provides significant benefits over traditional float chargers whose output voltage droops under heavy loads, and fails to attain proper voltage levels recommended by battery manufactures as part of a proper charge cycle. These issues are particular significant in Emergency Vehicle applications where rapid recharge is required while powering DC loads, and reliable service life of batteries is critical. PT Series chargers feature multiple isolated outputs to charge independent battery banks.	
CHASSIS AIR SHORE PUMP	59
SHORE POWER INLET	59
ENGINE COMPARTMENT LIGHT	59
CAB SPOTLIGHT	60
CAB HAZARD WARNING LIGHT	60
BACK-UP ALARM	60
REAR VIEW CAMERA	60

Kremmling Fire Protection District

Medium Rescue

Production Specification

TAIL LIGHTS.....	61
MIDSHIP MARKER/TURN SIGNAL	61
MARKER LIGHTS	61
CAB STEP LIGHTS / GROUND LIGHTS	61
LICENSE PLATE LIGHT	61
ELECTRONIC SIREN	61
SIREN SPEAKER	61
BROW MOUNT FLOODLIGHT(S) - LED.....	62
SIDE SCENE LIGHTS - LED	62
REAR SCENE LIGHTS - LED.....	62
TRAFFIC DIRECTIONAL LIGHT	62
WARNING LIGHT PACKAGE.....	63
UPPER LEVEL OPTICAL WARNING DEVICES.....	63
LOWER LEVEL OPTICAL WARNING DEVICES	65
LINE VOLTAGE ELECTRICAL SYSTEM	67
ONAN PTO GENERATOR.....	67
GENERATOR ENGAGEMENT	67
WARRANTY PERIOD.....	67
GENERATOR SPLASH GUARD	67
GENERATOR MOUNTING.....	67
MANUALS AND SCHEMATICS.....	68
POWER-TAKE-OFF GENERATOR DRIVE.....	68
ENGINE SPEED CONTROL.....	68
GENERATOR MONITORING PANEL	68
LOADCENTER.....	69
SHORE POWER INLET - BATTERY CHARGER.....	69
OUTLETS AND CIRCUITS	69
LINE VOLTAGE ELECTRICAL SYSTEM	70
GENERAL REQUIREMENTS	70
120/240 VAC SCENE LIGHTING	76
COMMAND LIGHT TOWER WITH METAL HALIDE BULB OPTION AND LOWER BANK BACKLIGHT	76
EQUIPMENT PAYLOAD WEIGHT ALLOWANCE.....	77
EQUIPMENT	77
REMAINING NFPA MINOR EQUIPMENT BY PURCHASER	77

Kremmling Fire Protection District

Medium Rescue

Production Specification

INTERNET IN-PROCESS SITE

The Bidder shall post and maintain a website where the Kremmling Fire Protection District will be able to view digital images of their apparatus as its being manufactured. The digital images shall be posted once a week starting when the body begins production or when the cab/chassis arrives and shall continue until the final completion of the apparatus.

VEHICLE STABILITY

ROLLOVER STABILITY

The apparatus shall meet the criteria defined below, or it shall be equipped with a stability control system defined below.

The apparatus shall meet the criteria defined in either of the following:

- 1) The apparatus shall remain stable to 26.5 degrees in both directions when tested on a tilt table in accordance with SAE J2180, *A Tilt Table Procedure for Measuring the Static Rollover Threshold for Heavy Trucks*.
- 2) The calculated or measured center of gravity (CG) shall be no higher than 80 percent of the rear axle track width.

Compliance shall be certified by testing, calculating, or measuring the apparatus or by comparing the apparatus to a compliant, substantially similar example apparatus and the certification shall be delivered with the fire apparatus.

The example apparatus shall be considered substantially similar if it includes a chassis with the same or higher CG height, the same or narrower rear axle track width, the same or greater water tank size and CG height, the same type of front and rear suspension and the same type and size of aerial device.

The apparatus shall be loaded with fuel, fire-fighting agents, hose, ladders, a weight of 250 lb in each seating position and weight equivalent to the Miscellaneous Equipment Allowance as defined in NFPA 1901, 2009 Edition, Table 12.1.2.

If the apparatus is designed to meet a specified higher equipment loading or larger hose bed capacity or to carry additional ground ladders, these greater loads shall be included in the testing, calculating or measuring.

The weight added to the fire apparatus for the purpose of test, calculation or measurement shall be distributed to approximate typical in-service use of the fire apparatus while not exceeding the manufacturer's published individual compartment weight ratings.

If the apparatus is equipped with a stability control system, the system shall have, at a minimum, a steering wheel position sensor, a vehicle yaw sensor, a lateral accelerometer and individual wheel brake controls.

Kremmling Fire Protection District

Medium Rescue

Production Specification

ROADABILITY

The apparatus, when loaded to its estimated in-service weight, shall be capable of the following performance while on dry, paved roads that are in good condition:

- 1) From a standing start, the apparatus shall be able to attain a speed of 35 mph (55 km/hr) within 25 seconds on a level road.
- 2) The apparatus shall be able to attain a minimum top speed of 50 mph (80 km/hr) on a level road.
- 3) The apparatus shall be able to maintain a speed of at least 20 mph (32 km/hr) on any grade up to and including 6 percent.

The maximum top speed of fire apparatus with a GVWR over 26,000 lb (11,800 kg) shall not exceed either 68 mph (105 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

If the combined water tank and foam agent tank capacities on the fire apparatus exceed 1250 gal (4732 L), or the GVWR of the vehicle is over 50,000 lb (22,680 kg), the maximum top speed of the apparatus shall not exceed either 60 mph (85 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

SERVICEABILITY

The fire apparatus shall be designed to allow the manufacturer's recommended routine maintenance checks of lubricant and fluid levels to be performed by the operator without lifting the cab of a tilt-cab apparatus or without the need for hand tools.

Where special tools are required for routine service on any component of the apparatus, such tools shall be provided with the apparatus.

Apparatus components that interfere with repair or removal of other major components shall be attached with fasteners, such as cap screws and nuts, so that the components can be removed and installed with ordinary hand tools. These components shall not be welded or otherwise permanently secured into place.

Kremmling Fire Protection District

Medium Rescue

Production Specification

CONSTRUCTION DOCUMENTATION

The contractor shall supply, at the time of delivery, at least one (1) copy of the following documents:

The manufacturers record of apparatus construction details, including the following information:

- 1) Owner's name and address
- 2) Apparatus manufacturer, model, and serial number
- 3) Chassis make, model, and serial number
 - a) GAWR of front and rear axles and GVWR
 - b) Front tire size and total rated capacity in pounds (kilograms)
 - c) Rear tire size and total rated capacity in pounds (kilograms)
 - d) Chassis weight distribution in pounds (kilograms) with water and manufacturer-mounted equipment (front and rear)
 - e) Engine make, model, serial number, rated horsepower and related speed, and governed speed; and if so equipped, engine transmission PTO(s) make, model, and gear ratio
 - f) Type of fuel and fuel tank capacity
 - g) Electrical system voltage and alternator output in amps
 - h) Battery make, model, and capacity in cold cranking amps (CCA)
 - i) Chassis transmission make, model, and serial number; and if so equipped, chassis transmission PTO(s) make, model, and gear ratio
- 4) Pump make, model, rated capacity in gallons per minute (liters per minute where applicable), and serial number
- 5) Pump transmission make, model, serial number, and gear ratio
- 6) Auxiliary pump make, model, rated capacity in gallons per minute (liters per minute where applicable), and serial number
- 7) Water and Foam tank certified capacity in gallons or liters
- 8) Paint manufacturer and paint number(s)
- 9) Company name and signature of responsible company representative
- 10) If the apparatus is a mobile foam fire apparatus, the certification of foam tank capacity
- 11) Certification of compliance of the optical warning system
- 12) Siren manufacturer's certification of the siren
- 13) Written load analysis and results of the electrical system performance tests
- 14) Certification of slip resistance of all stepping, standing, and walking surfaces
- 15) If the apparatus has a fire pump, the pump manufacturer's certification of suction capability
- 16) If the apparatus is equipped with a fire pump and special conditions are specified by the purchaser, the pump manufacturer's certification of suction capacity under the special conditions
- 17) If the apparatus has a fire pump, a copy of the apparatus manufacturer's approval for stationary pumping applications
- 18) If the apparatus has a fire pump, the engine manufacturer's certified brake horsepower curve for the engine furnished, showing the maximum governed speed
- 19) If the apparatus has a fire pump, the pump manufacturer's certification of the hydrostatic test
- 20) If the apparatus has a fire pump, the certification of inspection and test for the fire pump
- 21) If the apparatus is equipped with an auxiliary pump, the apparatus manufacturer's certification of the hydrostatic test
- 22) When the apparatus is equipped with a water tank, the certification of water tank capacity
- 23) If the apparatus has an aerial device, the certification of inspection and test for the aerial device
- 24) If the apparatus has an aerial device, all the technical information required for inspections to comply with NFPA 1911, Standard for the Inspection, Maintenance, Testing, and Retirement of In-Service Automotive Fire Apparatus
- 25) If the apparatus has a foam proportioning system, the foam proportioning system manufacturer's certification of accuracy and the final installer's certification the foam proportioning system meets this standard
- 26) If the system has a CAFS, the documentation of the manufacturer's pre delivery tests
- 27) If the apparatus has a line voltage power source, the certification of the test for the power source
- 28) If the apparatus is equipped with an air system, air tank certificates, the SCBA fill station certification, and the results of the testing of the air system installation
- 29) Any other required manufacturer test data or reports.

Kremmling Fire Protection District

Medium Rescue

Production Specification

OPERATIONS AND SERVICE DOCUMENTATION

The Contractor shall deliver with the fire apparatus at least two (2) sets of complete operation and service documentation covering the completed apparatus as delivered and accepted.

The documentation shall address at least the inspection, service, and operations of the fire apparatus and all major components thereof.

The Contractor shall also deliver with the fire apparatus the following documentation for the entire apparatus and each major operating system or major component of the apparatus:

- 1) Manufacturer's name and address
- 2) Country of manufacture
- 3) Source for service and technical information
- 4) Parts replacement information
- 5) Descriptions, specifications, and ratings of the chassis, pump (if applicable), and aerial device (if applicable)
- 6) Wiring diagrams for low voltage and line voltage systems to include the following information:
 - a) Pictorial representations of circuit logic for all electrical components and wiring
 - b) Circuit identification
 - c) Connector pin identification
 - d) Zone location of electrical components
 - e) Safety interlocks
 - f) Alternator-battery power distribution circuits
 - g) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems
- 7) Lubrication charts
- 8) Operating instructions for the chassis, any major components such as a pump or aerial device, and any auxiliary systems
- 9) Precautions related to multiple configurations of aerial devices, if applicable
- 10) Instructions regarding the frequency and procedure for recommended maintenance
- 11) Overall apparatus operating instructions
- 12) Safety considerations
- 13) Limitations of use
- 14) Inspection procedures
- 15) Recommended service procedures
- 16) Troubleshooting guide
- 17) Apparatus body, chassis and other component manufacturer's warranties
- 18) Special data required by this standard
- 19) A material safety data sheet (MSDS) for any fluid that is specified for use on the apparatus

The Contractor shall deliver with the apparatus all manufacturer's operations and service documents supplied with components and equipment that are installed or supplied by the Contractor.

NFPA REQUIRED DOCUMENTATION FORMAT - CD-ROM

The vehicle construction details and the operations and service documentation as required per NFPA 1901 latest edition shall be provided on a CD-ROM. These manuals shall be divided into sections for ease of reference. There shall be two (2) copies of the CD-ROM provided with the completed vehicle.

Kremmling Fire Protection District

Medium Rescue

Production Specification

CARRYING CAPACITY

The GAWR and the GCWR or GVWR of the chassis shall be adequate to carry the weight of the completed vehicle when loaded to its estimated in-service weight. The Body Manufacturer shall establish the estimated in service weight during the design of the vehicle

The estimated in-service weight shall include the following:

- 1) The chassis, body and tank(s)
- 2) Full fuel, lubricant, and other chassis or component fluid tanks or reservoirs
- 3) Full water and other agent tanks
- 4) *250 lb (114 kg) in each seating position
- 5) Fixed equipment such as pumps, aerial devices, generators, reels and air systems as installed
- 6) Ground ladders, suction hose, designed hose load in their hose beds and on their reels
- 7) An allowance for miscellaneous equipment that is the greatest of the values for type of vehicle per NFPA 1901, a Purchaser provided list of equipment to be carried with weights or a Purchaser specified miscellaneous equipment allowance.

The Body Manufacturer shall engineer and design the vehicle such that the completed unit, when loaded to its estimated in-service weight, with all movable weights distributed as close as is practical to their intended in-service configuration, does not exceed the GVWR.

A final Body Manufacturer's certification of the GVWR or GCWR, along with a certification of each GAWR, shall be supplied on a label affixed to the vehicle.

			Equipment Allowance	
Apparatus Type	Equip. Storage Area	Apparatus Size	lb.	kg.
Special Service Fire Apparatus	Minimum of 120 cu ft (3.4 cu mt) of enclosed compartmentation.	10,000 lb to 15,000 lb (4,500 kg to 7,000 kg) GVWR	2,000	910
		15,001 lb to 20,000 lb (7,001 kg to 9,000 kg) GVWR	2,500	1,135
		20,001 lb to 30,000 lb (9,001 kg to 14,000 kg) GVWR	3,000	1,350
		30,001 lb to 40,000 lb (14,001 kg to 18,000 kg) GVWR	4,000	1,800
		40,001 lb to 50,000 lb (18,001 kg to 23,000 kg) GVWR	6,000	2,700
		50,001 lb to 60,000 lb (23,001 kg to 27,000 kg) GVWR	8,000	3,600
		60,001 lb and up (27,001 kg) GVWR	10,000	4,500

Kremmling Fire Protection District

Medium Rescue

Production Specification

TESTING

ROAD TEST

Road test shall be conducted in accordance with this section to verify that the completed apparatus is capable of compliance with Roadability Section.

The tests shall be conducted at a location and in a manner that does not violate local, state or provincial or federal traffic laws.

The tests shall be conducted on dry, level, paved roads that are in good condition. The apparatus shall be loaded to its estimated in service weight.

The engine shall not operate in excess of the maximum governed speed. Acceleration tests shall consist of two runs in opposite directions over the same route. The fire apparatus shall attain a speed of 35 mph (55 km/hr) from a standing start within 25 seconds. The fire apparatus shall attain a minimum top speed of 50 mph (80 km/hr).

If the apparatus is equipped with an auxiliary braking system, the Body Manufacturer shall road test the system to confirm that the system is functioning as intended by the auxiliary braking system manufacturer.

If the apparatus is equipped with an air brake system, the service brakes shall bring the apparatus, when loaded to its GVWR, to a complete stop from an initial speed of 20 mph (32.2 km/hr) in a distance not exceeding 35 ft (10.7 m) by actual measurement on a paved, level, dry surface road that is free of loose material, oil or grease.

If the apparatus is equipped with a hydraulic brake system, the service brakes shall bring the apparatus, when loaded to its GVWR, to a complete stop from an initial speed of 30 mph (48.2 km/hr) in a distance not exceeding 88 ft (26.8 m) by actual measurement on a paved, level, dry surface road that is free of loose material, oil or grease.

LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST

The vehicles low voltage electrical system shall be tested and certified by the manufacturer. The certified test results shall be delivered with the completed vehicle. Tests shall be performed when the air temperature is between 0°F and 110°F (–18°C and 43°C).

TEST SEQUENCE

The following three (3) tests shall be performed in the order in which they appear below. Before each test, the batteries shall be fully charged until the voltage stabilizes at the voltage regulator set point and the lowest charge current is maintained for ten (10) minutes. Failure of any of these tests shall require a repeat of the sequence.

1. RESERVE CAPACITY TEST

The engine shall be started and kept running until the engine and engine compartment temperatures are stabilized at normal operating temperatures and the battery system is fully charged. The engine shall be shut off and the minimum continuous electrical load shall be activated for ten (10) minutes.

All electrical loads shall be turned off prior to attempting to restart the engine. The battery system shall then be capable of restarting the engine. Failure to restart the engine shall be considered a test failure of the battery system.

Kremmling Fire Protection District

Medium Rescue

Production Specification

2. ALTERNATOR PERFORMANCE TEST

TEST AT IDLE

The minimum continuous electrical load shall be activated with the engine running at idle speed. The engine temperature shall be stabilized at normal operating temperature. The battery system shall be tested to detect the presence of battery discharge current. The detection of battery discharge current shall be considered a test failure.

TEST AT FULL LOAD

The total continuous electrical load shall be activated with the engine running up to the engine manufacturer's governed speed. The test duration shall be a minimum of two (2) hours. Activation of the load management system shall be permitted during this test.

An alarm sounded by excessive battery discharge, as detected by the warning system required in 13.3.4, or a system voltage of less than 11.8 V dc for a 12 V nominal system, 23.6 V dc for a 24 V nominal system, or 35.4 V dc for a 42 V nominal system for more than 120 seconds shall be considered a test failure.

3. LOW VOLTAGE ALARM TEST

The following test shall be started with the engine off and the battery voltage at or above 12 V for a 12 V nominal system, 24 V for a 24 V nominal system or 36 V for a 42 V nominal system.

With the engine shut off, the total continuous electrical load shall be activated and shall continue to be applied until the excessive battery discharge alarm activates. The battery voltage shall be measured at the battery terminals.

The test shall be considered a failure if the alarm does not sound in less than 140 seconds after the voltage drops to 11.70 V for a 12 V nominal system, 23.4 V dc for a 24 V nominal system, or 35.1 V for a 42 V nominal system.

The battery system shall then be able to restart the engine. Failure to restart the engine shall be considered a test failure.

LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST

DOCUMENTATION

The manufacturer shall deliver the following with the fire apparatus:

- 1) Documentation of the electrical system performance tests
- 2) A written electrical load analysis, including the following:
 - a) The nameplate rating of the alternator
 - b) The alternator rating
 - c) Each of the component loads specified that make up the minimum continuous electrical load
 - d) Additional electrical loads that, when added to the minimum continuous electrical load, determine the total continuous electrical load
 - e) Each individual intermittent electrical load

Kremmling Fire Protection District

Medium Rescue

Production Specification

UL 120/240 VAC CERTIFICATION

The 120/240 volt electrical system shall be tested and certified by Underwriters Laboratories, to perform as listed below;

The prime mover shall be started from a cold start condition, and the unloaded voltage and frequency shall be recorded.

The line voltage electrical system shall be loaded to at least 100% of the continuous rated wattage stated on the power source specification label. Testing with a resistive load bank shall be permitted.

The power source shall be operated in the manner specified by the apparatus manufacturer as documented on instruction plates or in operation manuals. The power source shall be operated at a minimum of 100% of the continuous rated wattage as stated on the power source specification label for a minimum of two (2) hours.

The load shall be adjusted to maintain the output wattage at or above the continuous rated wattage during the entire 2-hour test.

The following conditions shall be recorded at least every 1/2 hour during the test:

- 1) The power source output voltage, frequency and amperes
- 2) The prime mover's oil pressure, water temperature and transmission temperature, if applicable
- 3) The power source hydraulic fluid temperature, if applicable
- 4) The ambient temperature and power source air inlet temperature

The following conditions shall be recorded once during the test for power sources driven by dedicated auxiliary internal combustion engines:

- 1) Altitude
- 2) Barometric pressure
- 3) Relative humidity

If the generator is driven by the chassis engine and the generator allows for operation at variable speeds, the chassis engine speed shall be reduced to the lowest rpm allowed for generator operation and the voltage and frequency shall be recorded.

The load shall be removed and the unloaded voltage and frequency shall be recorded.

Voltage shall be maintained within $\pm 10\%$ of the voltage stated on the power source specification label during the entire test. Frequency shall be maintained within ± 3 Hz of the frequency stated on the power source specification label during the entire test.

The total continuous electrical loads, excluding those loads associated with the equipment defined in NFPA 22.15.7.3.11.2, shall be applied during the testing unless an auxiliary engine drives the power source.

If the apparatus is equipped with a fire pump, the 2-hour certification test of the power source shall be completed with the fire pump pumping at 100% capacity at 150 psi (1000 kPa) net pump pressure. The test shall be permitted to be run concurrently with the pump certification test.

DOCUMENTATION

The Body Manufacturer shall deliver the following with the fire apparatus:

The results of each test shall be recorded on an appropriate form and provided with the delivery of the fire apparatus.

Kremmling Fire Protection District

Medium Rescue

Production Specification

DIELECTRIC VOLTAGE WITHSTAND TEST

The line voltage wiring and permanently connected devices and equipment shall be subjected to a dielectric voltage withstand test of 900 volts for one (1) minute. The testing shall be performed after all body work has been completed.

The test shall be conducted as follows:

- 1) Isolate the power source from the panel board and disconnect any solid state low voltage components
- 2) Connect one lead of the dielectric tester to all the hot and neutral buses tied together
- 3) Connect the other lead to the fire apparatus frame or body
- 4) Close any switches and circuit breakers in the circuit(s)
- 5) Apply the dielectric voltage for one (1) minute in accordance with the testing equipment manufacturer's instructions

The electrical polarity of all permanently wired equipment, cord reels and receptacles shall be tested to verify that wiring connections have been properly made.

Electrical continuity shall be verified from the chassis or body to all line voltage electrical enclosures, light housings, motor housings, light poles, switch boxes and receptacle ground connections that are accessible to fire fighters in normal operations.

If the apparatus is equipped with a transfer switch, it shall be tested to verify operation and that all non grounded conductors are switched.

Electrical light towers, floodlights, motors, fixed appliances and portable generators shall be operated at their full rating or capacity for 30 minutes to ensure proper operation.

WARRANTY

A full statement shall be provided of the warranties for the vehicle(s) being bid. Warranties should clearly describe the terms under which the vehicle manufacturer accepts responsibility for the cost to repair defects caused by faulty design, quality of work or material and for the applicable period of time after delivery.

Cost of repairs refers to all costs related thereto including, but not limited to, the cost of materials and the cost of labor.

The Body Manufacturer shall warrant all materials and accessories used on the vehicle(s), whether fabricated by manufacturer or purchased from an outside source and will deal directly with the Kremmling Fire Protection District on all warranty work.

GENERAL LIMITED WARRANTY - ONE (1) YEAR

The vehicle shall be free of defects in material and workmanship for a period of one (1) year or 24,000 miles (or 38,624 kilometers), whichever occurs first starting thirty (30) days after the original invoice date.

The Contractor must be the "single source" coordinator of all warranties on the vehicle.

LOW VOLTAGE ELECTRICAL WARRANTY - FIVE (5) YEARS

The vehicle low voltage electrical system shall be free of defects in material and workmanship for a period of five (5) years or 60,000 miles (or 96,561 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

Kremmling Fire Protection District

Medium Rescue

Production Specification

STRUCTURAL WARRANTY - TEN (10) YEARS

The body shall be free of structural or design failure or workmanship for a period of ten (10) years, or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

PAINT LIMITED WARRANTY - TEN (10) YEARS

The body shall be free of bubbling or peeling as a result of a defect in the method of manufacture for a period of ten (10) years or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

GRAPHICS LIMITED WARRANTY

The 3M graphics installation shall be warranted for a period of two (2) years. The 3M materials installed on completed vehicle shall be warranted for seven (7) years. The 3M Diamond grade film (if specified) shall be warranted for ten (10) years.

CONSTRUCTION PERIOD

The completed vehicle shall be delivered within two hundred seventy (270) days after receipt of a purchase order or contract.

Contractor shall not be held liable for delays of chassis delivery due to accidents, strikes, floods or other events not subject to their control. Contractor shall provide immediate written notice to Kremmling Fire Protection District as to delays and to what extent these delays have in completing vehicle within the stated construction time period.

OVERALL HEIGHT

The overall height (OAH) of the vehicle shall be approximately 127"(10'-7") from the ground. This measurement shall be taken on flat ground with the tires properly inflated, in the unloaded condition, at that highest point of the vehicle.

OVERALL LENGTH

The overall length (OAL) of the vehicle shall be approximately 356"(29'-5").

OVERALL WIDTH

The overall width (OAW) of the body at drip rails shall be 102" (8' - 6"), and body shall be 100" (8' - 4").

PRE-CONSTRUCTION CONFERENCE

A pre-construction conference shall be required, at the Contractor's factory for three (3) personnel from the Kremmling Fire Protection District to finalize all construction details prior to manufacturing.

The Contractor shall at his/her expense, provide transportation, lodging, rental car and meal expenses during the pre-construction conference. Any travel distance greater than 250 miles shall be by non-stop commercial air travel.

Kremmling Fire Protection District

Medium Rescue

Production Specification

PRE-PAINT CONFERENCE

A pre-paint conference shall be required, at the Contractor's factory for three (3) personnel from the Kremmling Fire Protection District to inspect the vehicle and construction details prior to the painting process.

The Contractor shall at his/her expense, provide transportation, lodging, rental car and meal expenses during the pre-paint conference. Any travel distance greater than 250 miles shall be by non-stop commercial air travel.

FINAL INSPECTION CONFERENCE

A final inspection conference shall be required, at the Contractor's factory for three (3) personnel from the Kremmling Fire Protection District to inspect the vehicle and construction details prior to shipment of the completed vehicle. This inspection shall take place after any specified striping and lettering is installed.

The Contractor shall at his/her expense, provide transportation, lodging, rental car and meal expenses during the final inspection conference. Any travel distance greater than 250 miles shall be by non-stop commercial air travel.

APPARATUS DELIVERY

The Kremmling Fire Protection District shall pick up finished apparatus at Contractor's facility. The Contractor shall be responsible for notifying the Kremmling Fire Protection District a minimum of two (2) weeks prior to the completion of apparatus, so that the Kremmling Fire Protection District has sufficient time to schedule pickup.

Kremmling Fire Protection District

Medium Rescue

Production Specification

CAB CHASSIS SPECIFICATIONS

Model Profile

2012 7400 SFA 4X4 (SR525)

MISSION:	Requested GVWR: 37000. Calc. GVWR: 36220 Calc. Start / Grade Ability: 26.70% / 3.09% @ 55 MPH Calc. Geared Speed: 72.4 MPH
DIMENSION:	Wheelbase: 215.00, CA: 96.10, Axle to Frame: 42.00
ENGINE, DIESEL:	{MaxxFort 9} EPA 10, 330 HP @ 2000 RPM, 950 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed
TRANSMISSION, AUTOMATIC:	{Allison 3000EVS_P} 4th Generation Controls; Close Ratio, 5-Speed; With Overdrive, Includes Oil Level Sensor, With Provision for PTO, Less Retarder, Max. GVW N/A
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT DRIVING:	{Meritor MX-14-120} Single Reduction, 14,000-lb Capacity
AXLE, REAR, SINGLE:	{Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends, Driver Controlled Locking Differential Gear Ratio: 4.89
CAB:	Conventional 6-Man Crew Cab
TIRE, FRONT:	(2) 11R22.5 XZY-3 (MICHELIN) 496 rev/mile, load range H, 16 ply
TIRE, REAR:	(4) 11R22.5 XDN2 (MICHELIN) 497 rev/mile, load range H, 16 ply
SUSPENSION, RR, SPRING, SINGLE:	Vari-Rate; 23,500-lb Capacity
PAINT:	Cab schematic 100GM Location 1: 9219, Winter White (Std) Chassis schematic N/A

Description Base Chassis, Model 7400 SFA 4X4 with 215.00 Wheelbase, 96.10 CA, and 35.00 Axle to Frame.

TOW HOOK, FRONT (2) Frame Mounted

FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.250" x 3.610" x 0.375" (260.4mm x 91.7mm x 9.5mm); 456.0" (11582mm) Maximum OAL

BUMPER, FRONT Steel, 15 Degree Swept Back, Black, with Headlight Provision

FRAME EXTENSION, FRONT Integral; 20" In Front of Grille

WHEELBASE RANGE 207" (525cm) Through and Including 254" (645cm)

AXLE, FRONT DRIVING {Meritor MX-14-120} Single Reduction, 14,000-lb Capacity

Includes:

DRAIN PLUG, DRIVING FRONT AXLE Magnetic

Notes:

The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.

Kremmling Fire Protection District

Medium Rescue

Production Specification

SUSPENSION, FRONT, SPRING Parabolic, Taper Leaf; 14,000-lb Capacity; With Shock Absorbers

Includes:

SPRING PINS Rubber Bushings, Maintenance-Free

Notes:

The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.

BRAKE SYSTEM, AIR Dual System for Straight Truck Applications

Includes:

BRAKE LINES Color and Size Coded Nylon

DRAIN VALVE Twist-Type

DUST SHIELDS, FRONT BRAKE

DUST SHIELDS, REAR BRAKE

GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster

PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel

PARKING BRAKE VALVE For Truck

QUICK RELEASE VALVE Bendix On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4

SLACK ADJUSTERS, FRONT Automatic

SLACK ADJUSTERS, REAR Automatic

SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4

Notes:

Rear Axle is Limited to 23,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Standard Rear Air Cam Brakes Regardless of Axle/Suspension Ordered.

DRAIN VALVE {Berg} Manual; With Pull Chain, for Air Tank

Includes:

DRAIN VALVE Mounted in Wet Tank

BRAKE SHOES, REAR Cast

Notes:

Provides Rear Axle GAWR Up to 26,000-Lb.

The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.

AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)

AIR DRYER {Bendix AD-IP} With Heater

Includes:

AIR DRYER LOCATION Outside Left Rail, Back of Cab

BRAKE CHAMBERS, FRONT AXLE {Haldex} 20 SqIn

BRAKE CHAMBERS, REAR AXLE {Haldex GC3030LHDHO} 30/30 Spring Brake

Includes:

BRAKE CHAMBERS, SPRING (2) Rear Parking; WITH TRUCK BRAKES: All 4x2, 4x4; WITH TRACTOR

BRAKES: All 4x2, 4x4; 6x4 & 6x6 with Rear Tandem Axles Less Than 46,000-lb. or GVWR Less Than 54,000-lb.

Kremmling Fire Protection District

Medium Rescue

Production Specification

BRAKES, FRONT, AIR CAM S-Cam; 16.5" x 5.0"; Includes 20 Sq. In. Long Stroke Brake Chambers

Notes:

The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.

BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake

Notes:

The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.

AIR COMPRESSOR {Bendix Tu-Flo 550} 13.2 CFM Capacity

STEERING COLUMN Tilting

STEERING WHEEL 2-Spoke, 18" Diam., Black

STEERING GEAR {Sheppard M-110} Power

EXHAUST SYSTEM Single, Horizontal, Aftertreatment Device Frame Mounted Left Side Under Cab; Includes Horizontal Tail Pipe, Provides Clean CA Above & Below Rail

Includes:

The Horizontal Tailpipe Includes a Temperature Control Device

ENGINE COMPRESSION BRAKE for MaxxForce I6 Engines; Electronically Activated

SWITCH, FOR EXHAUST 2 Position, Lighted & Latching, ON/OFF Type, Mounted in IP, Inhibits Diesel Particulate Filter Regeneration as Long as Switch is in ON Position

Kremmling Fire Protection District

Medium Rescue

Production Specification

ELECTRICAL SYSTEM 12-Volt, Standard Equipment

Includes:

BATTERY BOX Steel with Plastic Lid
DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab
FUSES, ELECTRICAL SAE Blade-Type
HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover
HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
HEADLIGHTS (2) Sealed Beam, Round, with Chrome Plated Bezels
HORN, ELECTRIC Single
JUMP START STUD Located on Positive Terminal of Outermost Battery
PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
RUNNING LIGHT (2) Daytime, Included With Headlights
STARTER SWITCH Electric, Key Operated
STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature
TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush

Mounted

WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
WIRING, CHASSIS Color Coded and Continuously Numbered

CIGAR LIGHTER Includes Ash Cup

HORN, ELECTRIC (2)

IGNITION SWITCH Keyless

ALTERNATOR {Leece-Neville 14931PAH} Brush Type, 12 Volt 320 Amp. Capacity, Pad Mounted

BODY BUILDER WIRING Back of Standard Cab at Left Frame or Under Extended or Crew Cab at Left Frame; Includes Sealed Connectors for Tail/Amber Turn/Marker/ Backup/Accessory Power/Ground and Sealed Connector for Stop/Turn

BATTERY SYSTEM {International} Maintenance-Free, (3) 12-Volt 1950CCA Total

RADIO {International} AM/FM Premium Stereo, With CD Player, Weatherband, Clock, Front & Rear Aux Input, USB Port, and Multiple Speakers, Includes iPod Command and Control

Includes:

SPEAKERS IN CAB (2) Coaxial with Deluxe Interior
SPEAKERS IN CAB (4) Coaxial with Premium Interior

BACK-UP ALARM Electric, 102 Db

BATTERY DISCONNECT SWITCH {Joseph Pollak} for Cab Power Disconnect Switch; Lever Operated, Disconnects Power to PDC, Does Not Disconnect Charging Circuits, Cab Mounted

HEADLIGHTS Long Life Halogen; for Two Light System

STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt; less Thermal Over-Crank Protection

INDICATOR, LOW COOLANT LEVEL With Audible Alarm

Kremmling Fire Protection District

Medium Rescue

Production Specification

INDICATOR, BATTERY WARNING Green BATTERY ON Indicator, Mounted on Left Side of Instrument Panel, To be Used with Factory Installed or Customer Mounted Battery Disconnect Switch

CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III With Trip Indicators, Replaces All Fuses Except For 5-Amp Fuses

FENDER EXTENSIONS Rubber

GRILLE Stationary, Chrome

GRILLE EMBER SCREEN Mounted to Grille to Keep Hot Embers out of Engine Air Intake System

FRONT END Tilting, Fiberglass, With Three Piece Construction; for 2007 & 2010 Emissions

PAINT SCHEMATIC, PT-1 Single Color, Design 100

Includes:

PAINT SCHEMATIC ID LETTERS "GM"

PAINT TYPE Base Coat/Clear Coat, 1-2 Tone

KEYS - ALL ALIKE, ID Z-001

CLUTCH Omit Item (Clutch & Control)

OIL FILTER, ENGINE {Hudgins Model 960 Spinner}

ENGINE, DIESEL {MaxxForce 9} EPA 10, 330 HP @ 2000 RPM, 950 lb-ft Torque @ 1200 RPM, 2200 RPM Governed Speed

Includes:

AIR COMPRESSOR AIR SUPPLY LINE Naturally-Aspirated (Air Brake Chassis Only)

ANTI-FREEZE Red Shell Rotella Extended Life Coolant; -40 Degrees F/ -40 Degrees C; for MaxxForce Engines

COLD STARTING EQUIPMENT Intake Manifold Electric Grid Heater with Engine ECM Control

CRUISE CONTROL Electronic; Controls Integral to Steering Wheel

ENGINE OIL DRAIN PLUG Magnetic

ENGINE SHUTDOWN Electric, Key Operated

FUEL FILTER Included with Fuel/Water Separator

FUEL/WATER SEPARATOR Fuel/Water Separator and Fuel Filter in a Single Assembly; With Water-in-Fuel Sensor; Engine Mounted

GOVERNOR Electronic

OIL FILTER, ENGINE Spin-On Type

WET TYPE CYLINDER SLEEVES

FAN DRIVE {Horton Drivemaster Polar Extreme} Direct Drive Type, Two Speed, With Residual Torque Device for Disengaged Fan Speed

Includes:

FAN Nylon

Kremmling Fire Protection District

Medium Rescue

Production Specification

RADIATOR Aluminum, Front to Back Cross Flow, Series System; 1588 SqIn Core and 885 SqIn Charge Air Cooler and 470 SqIn Low Temperature Radiator Down Flow, Includes Transmission Oil Cooler

Includes:

DEAERATION SYSTEM with Surge Tank

HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps

RADIATOR HOSES Premium, Rubber

FEDERAL EMISSIONS for 2010; MaxxForce 9 & 10 Engines

AIR CLEANER Single Element

Includes:

GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted

THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel

ENGINE CONTROL, REMOTE MOUNTED Provision for; Includes Wiring for Body Builder Installation of PTO Controls; With Ignition Switch Control for MaxxForce post 2007 Emissions Electronic Engines

FAN OVERRIDE Manual; With Electric Switch on Instrument Panel, (Fan On With Switch On)

EMISSION COMPLIANCE Engine Shutdown System Exempt Vehicles, Complies With California Clean Air Regulations

TRANSMISSION, AUTOMATIC {Allison 3000EVS_P} 4th Generation Controls; Close Ratio, 5-Speed; With Overdrive, Includes Oil Level Sensor, With Provision for PTO, Less Retarder, Max. GVW N/A

Includes:

OIL FILTER, TRANSMISSION Mounted on Transmission

TRANSMISSION OIL PAN Magnet in Oil Pan

TRANSFER CASE {Meritor T-4210 2} 2 Spd, 10000 lb-ft Total Capacity, With Provision for PTO, With Electric Over Air Control

Includes:

LIGHT, INDIC, ALL-WHEEL DRIVE Illuminates With All Wheel Drive Engaged, Located on Instrument Panel

TRANSMISSION SHIFT CONTROL {Allison} Push-Button Type; for Allison 3000 & 4000 Series Transmission

TRANSFER CASE LUBE {EmGard 50W} Synthetic; 1 thru 14.99 Pints

OIL COOLER, TRANSFER CASE Remote Mounted Back of Cab

TRANSMISSION OIL Synthetic; 29 thru 42 Pints

ALLISON SPARE INPUT/OUTPUT for Emergency Vehicle Series (EVS); Rescue, Ambulance

SHIFT CONTROL PARAMETERS Allison Performance Programming in Primary and Allison Economy Programming in Secondary

Kremmling Fire Protection District

Medium Rescue

Production Specification

AXLE, REAR, SINGLE {Meritor RS-23-160} Single Reduction, 23,000-lb Capacity, 200 Wheel Ends, Driver Controlled Locking Differential . Gear Ratio: 4.89

Includes:

REAR AXLE DRAIN PLUG (1) Magnetic, For Single Rear Axle

Notes:

The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.

When Specifying Axle Ratio, Check Performance Guidelines and TCAPE for Startability and Performance

SUSPENSION, RR, SPRING, SINGLE Vari-Rate; 23,500-lb Capacity

Notes:

The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.

SPRINGS, REAR AUXILIARY Multileaf; 4,500-lb Capacity

FUEL/WATER SEPARATOR With Filter Restriction/Change Indicator, Includes Standard Equipment Waterin- Fuel Sensor

FUEL TANK Top Draw; D Style, Non Polished Aluminum, 19" Deep, 50 U.S. Gal., 190 L Capacity, Beveled Back of Tank, With Quick Connect Outlet, Mounted Left Side, Under Cab

CAB Conventional 6-Man Crew Cab

Includes:

ARM REST (2) Molded Plastic; One Each Door

CLEARANCE/MARKER LIGHTS (5) Flush Mounted

COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window

CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel

DOMELIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted

GLASS, ALL WINDOWS Tinted

GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side

GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side

GRAB HANDLE, CAB INTERIOR (4) Two Each Side, Rear Door Mounted at Hinge Side and "C" Pillar Mounted

INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color

STEP (8) Two Steps Per Door

Notes:

43.9" CA Loss

GAUGE CLUSTER English With English Electronic Speedometer

Includes:

GAUGE CLUSTER (6) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter, Washer Fluid Level

ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout

WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)

Kremmling Fire Protection District

Medium Rescue

Production Specification

SEATBELT WARNING PREWIRE Includes Seat Belt Switches and Seat Sensors for all Belted Positions in the Cab and a Harness Routed to the Center of the Dash for the Aftermarket Installation of the Data Recorder and Seatbelt Indicator Systems, for 4 to 6 Seat Belts

GAUGE, OIL TEMP, ALLISON TRAN

IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster

SEAT, DRIVER {National 2000} NFPA Compliant, Air Suspension, High Back With Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, 2 Position Front Cushion Adjust, -3 to +14 Degree Back Angle Adjust

Includes:

SEAT BELT 3-Point, Lap and Shoulder Belt Type

SEAT, REAR {National 2000} Two Individual Outboard Seats, NFPA Compliant, Air Suspension, High Back, Vinyl, Isolator, With 2 Position Front Cushion Adjustment, -3 to +14 Degree Seat Back Adjustment, Lumbar, With 18" Wide Cushion and 20" Seat Back

Includes:

SEAT BELT Two 3-Point Shoulder Belts

SEAT, PASSENGER {National 2000} NFPA Compliant, Air Suspension, High Back With Integral Headrest, Vinyl, Isolator, 1 Chamber Lumbar, 2 Position Front Cushion Adjustment, -3 to +14 Degree Back Angle Adjust

Includes:

SEAT BELT 3-Point, Lap and Shoulder Belt Type

GRAB HANDLE (2) Chrome Towel Bar Type With Anti-Slip Rubber Inserts; for Cab Entry, Mounted Left and Right, Each Side at "B" Pillar

MIRRORS (2) {Lang Mekra} Styled; Rectangular, 7.09" x 15.75" & Integral Convex Both Sides, 102" Inside Spacing, Breakaway Type, Heated Heads Thermostat Controlled, Power Both Sides Flat Glass Only, Clearance Lights LED

SEAT BELT All Red; 4 to 6

CAB MOUNTING HEIGHT EFFECTS High Cab in Lieu of Mid High Cab Mounting (Approx. 4.5")

AIR CONDITIONER {Blend-Air} With Integral Heater & Defroster

Includes:

HEATER HOSES Premium

HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps

REFRIGERANT Hydrofluorocarbon HFC-134A

INSTRUMENT PANEL Center Section, Flat Panel

HVAC FRESH AIR FILTER

STORAGE POCKET, DOOR Molded Plastic, Full Width; Mounted on Passenger Door

Kremmling Fire Protection District

Medium Rescue

Production Specification

CAB INTERIOR TRIM Deluxe; for Crew Cab

Includes:

"A" PILLAR COVER Molded Plastic

CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering

CONSOLE, OVERHEAD PANELS Molded Plastic; With Dual Storage Pockets with Retainer Nets and CB Radio Pocket

DOOR TRIM PANELS Molded Plastic; Driver and Passenger Doors

FLOOR COVERING Rubber, Black

HEADLINER Soft Padded Cloth

INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section

STORAGE POCKET, DOOR (1) Molded Plastic, Full-Length; Driver Door

SUN VISOR (2) Padded Vinyl with Driver Side Toll Ticket Strap, Integral to Console

CAB REAR SUSPENSION Air Bag Type

WHEELS, FRONT DISC; 22.5" Polished Aluminum, 10-Stud (285.75MM BC) Hub Piloted, Flanged Nut, Metric Mount, 8.25 DC Rims; With Steel Hubs

Notes:

Aluminum Wheels not Painted or Coated

Compatible Tire Sizes: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5

WHEELS, REAR DUAL DISC; 22.5" Polished Aluminum, 10-Stud (285.75MM BC) Hub Piloted, Flanged Nut, Metric Mount, 8.25 DC Rims; With Steel Hubs

Notes:

Aluminum Wheels not Painted or Coated

Compatible Tire Sizes: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5

Polished Surface Outside Dual Only

BDY INTG, I/O EXPANSION HARNES {for Diamond Logic Builder} In-Cab wire harness (DLB) program only, Includes a harness with five blunt cut wires routed on lower left of instrument panel. Two ground active inputs and two (.5Amp) relay drivers outputs are provided

(2) TIRE, FRONT 11R22.5 XZY-3 (MICHELIN) 496 rev/mile, load range H, 16 ply

(4) TIRE, REAR 11R22.5 XDN2 (MICHELIN) 497 rev/mile, load range H, 16 ply

CAB/CHASSIS PREPAYMENT

The specified cab/chassis shall be prepaid by Kremmling Fire Protection District within 30 days of invoice. Kremmling Fire Protection District understands that if payment is made after 30 days, additional interest charges may apply.

Kremmling Fire Protection District

Medium Rescue

Production Specification

CHASSIS MODIFICATIONS

LUBRICATION AND TIRE DATA PLATE

A permanent label in the driving compartment shall specify the quantity and type of the following fluids used in the vehicle and tire information:

- Engine oil
- Engine coolant
- Chassis transmission fluid
- Pump transmission lubrication fluid . . (if applicable)
- Pump priming system fluid, if applicable . . (if applicable)
- Drive axle(s) lubrication fluid
- Air conditioning refrigerant . . (if applicable)
- Air conditioning lubrication oil . . (if applicable)
- Power steering fluid
- Cab tilt mechanism fluid . . (if applicable)
- Transfer case fluid . . (if applicable)
- Equipment rack fluid (if applicable)
- CAFS air compressor system lubricant . . (if applicable)
- Generator system lubricant . . (if applicable)
- Front tire cold pressure
- Rear tire cold pressure
- Maximum tire speed ratings

VEHICLE DATA PLATE

A permanent label in the driving compartment which indicates the following:

- Filter part numbers for the;
 - Engine
 - Transmission
 - Air
 - Fuel
- Serial numbers for the;
 - Engine
 - Transmission
- Delivered Weights of the Front and Rear Axles
- Paint Brand and Code(s)
- Sales Order Number

OVERALL HEIGHT, LENGTH DATA PLATE (US)

The fire apparatus manufacturer shall permanently affix a high-visibility label in a location visible to the driver while seated.

The label shall show the height of the completed fire apparatus in feet and inches, the length of the completed fire apparatus in feet and inches, and the GVWR in pounds.

Wording on the label shall indicate that the information shown was current when the apparatus was manufactured and that, if the overall height changes while the vehicle is in service, the fire department must revise that dimension on the plate.

Kremmling Fire Protection District

Medium Rescue

Production Specification

ACCIDENT PREVENTION

There shall be a placard in the cab seating area which reads, "ALL OCCUPANTS MUST BE SEATED AND BELTED WHEN THE APPARATUS IS IN MOTION".

PERSONNEL CAPACITY

A label that states the number of personnel the vehicle is designed to carry shall be located in an area visible to the driver.

ACCIDENT PREVENTION

If the rear bumper is 8" deep or more, there shall be a placard on the rear face of the body, in clear sight from the ground, which reads, "WARNING - DO NOT RIDE ON STEPS OR DECK AREAS WHILE THE APPARATUS IS IN MOTION. DEATH OR SERIOUS INJURY MAY RESULT".

WEARING HELMET WARNING

A label stating "DO NOT WEAR HELMET WHILE SEATED" shall be visible from each seating location.

FRONT BUMPER EXTENSION

The front bumper of the chassis as provided by the cab/chassis manufacturer shall be removed and replaced with a "Severe Duty" style bumper extended approximately 20.00 inches ahead of the cab.

The front bumper shall be constructed from structural steel channel. The bumper material shall be .38 thick ASTM A36 steel which shall measure approximately 12.00 inches high with a 3.05 inch flange and shall be 92.00 inches wide with angled front corners.

The bumper shall be primed and painted the lower body color.

BUMPER GRAVEL SHIELD

The front bumper extension shall have a 3/16" NFPA compliant aluminum tread plate gravel shield. The gravel shield shall cover the full width of the front bumper to the front of the cab and the full height of the bumper on each end.

AIR HORNS

There shall be no air horns provided on the completed vehicle.

MOTOR DRIVEN SIREN

There shall be a motor driven, streamlined, rotary siren with chrome plated grill and housing recess mounted in the extended front bumper. The siren shall be properly wired with heavy copper cable for minimum voltage drop. Make: Federal, Model: Q2B.

The siren shall be located on the streetside of the front bumper.

There shall be a siren brake installed in the rocker switch control panel to activate the siren brake.

SIREN ACTIVATION

The siren shall be operated by the steering wheel horn button located at the driver position and a push button switch on the cab console.

Kremmling Fire Protection District

Medium Rescue

Production Specification

MECHANICAL SIREN / ELECTRIC HORN SWITCH

There shall be a switch which allows the driver to select the steering column horn ring operation. This switch shall allow the driver to select either the mechanical siren or electric horn activation.

FRONT MOUNTED WINCH

The bumper extension shall be equipped with a Warn M12000, 12 volt electric, 12,000 lb. capacity winch.

The control of the winch shall be with a plug-in remote control unit. The unit shall have 12' of control cable, with forward, neutral and reverse dead man type hand control.

The winch shall be equipped with 125' of 3/8" galvanized cable. The cable shall end with a clamped type loop and a drop forged heavy duty hook. The cable shall feed through a full captive type 4-way roller and guide assembly.

DRIVING LIGHTS

There shall be two (2) Hella 007133831 Micro FF Series halogen driving lights provided in the front bumper. The lights shall be switched at the Vista display in the cab.

FRONT TOW PROVISIONS

The front tow provisions shall be supplied and installed by the cab/chassis manufacturer.

EXHAUST

The exhaust system shall be as provided by cab/chassis manufacturer. The tailpipe may require some modifications for proper ground clearances and fit with body.

The exhaust piping and discharge outlet shall be located or shielded so as not to expose any portion of the vehicle or equipment to excessive heating.

Exhaust pipe discharge shall be directed away from any operator's position or entry doors on body.

Where parts of the exhaust system are exposed so that they are likely to cause injury to operating personnel, protective guards shall be provided.

RADIO/ANTENNA INSTALLATION



Two (2) Kremmling Fire Protection District supplied radios (1 VHF, and 1 800 DTR) shall be installed in center console of cab within easy reach of driver. Antennas to be mounted to cab roof and terminated at radio location in cab console with 3' service loop using LMR195 flexible communications cable.

Radios shall be installed per manufacturers requirements and wired for proper 12 VDC power and ground.

KNOX BOX INSTALLATION

One (1) Kremmling Fire Protection District supplied Knox Box KeySecure encoder shall be installed in the area of the officers side seat riser, accessible from the ground.

Knox Box shall be installed per manufacturers requirements and wired for proper 12 VDC power and ground.

Kremmling Fire Protection District

Medium Rescue

Production Specification

VHF RADIO CHARGER INSTALATION

Four (4) Kremmling Fire Protection District supplied radio chargers for VHF handheld radios shall be installed on the cab console, as space permits.

800 Mhz RADIO CHARGER(S)

Two (2) Motorola WPLN 4208B IMPRESS Compatible Vehicular Chargers shall be provided and installed in the center console. The chargers shall include a microprocessor which senses the type of battery installed and controls the rate of charge accordingly. Batteries are charged at a rapid rate until fully charged at which point the unit reverts to a trickle charge. Batteries can be charged while on the radio or stand alone. The radio can be operated while in the charger and this unit is PAC RT compatible.

12 VDC ACCESSORY PLUG

There shall be two (2) 12 volt accessory plug(s) furnished and installed in the center cab console.

ROAD TEMPERATURE MEASURING SYSTEM

One (1) M.S. Foster & Associates, Inc. RoadWatch SS Road Temperature Measuring System shall be provided. The system shall include one (1) RoadWatch SS Road Temperature Sensor (part number MSF8490262003), and one (1) West Coast mirror mounting bracket (part number MSF3294). The sensor unit shall be located on the drivers side mirror bracket, and the display shall be located in the cab console.

SEAT BELT COLOR

Section 14.1.3.4 of the NFPA 1901 Standards, 2009 edition, requires all seat belt webbing in cab to be bright red or bright orange in color, and the buckle portion of the seat belt shall be mounted on a rigid or semi rigid stalk such that the buckle remains positioned in an accessible location.

SEAT BELT WEB LENGTH - COMMERCIAL CAB

Sections 14.1.3.2 and 14.1.3.3 of the NFPA 1901 standards, 2009 edition, require the effective seat belt web length for a Type 1 lap belt for pelvic restraint to be a minimum of 60", and a Type 2 pelvic and upper torso restraint-style seat belt assembly to be a minimum of 110".

The chassis seat belt web length as supplied by the commercial chassis manufacturer shall be compliant to NFPA Standards 14.1.3.2 and 14.1.3.3.

SEAT BELT MONITORING AND VEHICLE DATA RECORDER (VDR) SYSTEMS

SEAT BELT MONITORING

A Weldon 6204 series system with Vista III display shall be provided and installed to allow the driver to know if all persons seated in the vehicle are secured with seat belts before moving the vehicle. Built-in smart seating logic shall detect if the correct sit and buckle sequence is not followed for all seats. System shall also provide an output for an external alarm. Weldon diagnostic port will be located under dash on driver side. System shall include the following features;

Kremmling Fire Protection District

Medium Rescue

Production Specification

VEHICLE DATA RECORDER (VDR)

The vehicle data recorder shall have the following features;

- Recorded Data Includes: Vehicle Speed, Acceleration, Deceleration, Engine Speed, Engine Throttle Position, ABS Event, Seat Occupied Status, Seat Belt Status, Master Optical Warning Switch, Park Brake, Service Brake, Time, Date and Engine Hours.
- Password Protected by the customer
- Six (6) seat position inputs for occupied and belts buckled. Additional six (6) seat expansion module available.
- Easily interfaces with V-MUX™ or other multiplexing systems
- Data is extracted by a standard, mini USB cable

OCCUPANT RESTRAINT INDICATOR

The occupant restraint indicator shall have the following features;

- Will be displayed on Vista III panel.
- Supports commercial and custom cab seating layouts; up to 12 seats
- Built-in audible alarm
- Use in conjunction with Vehicle Data Recorder (VDR)

IGNITION KEY

If the vehicle is specified to have an ignition key it will be attached to steering column or dash with vinyl covered steel cable.

SIX (6) – LED TIRE PRESSURE VISUAL INDICATORS

Each tire shall be equipped with a VECSAFE heavy duty valve cap (or equal) LED indicator that indicates proper tire pressure.

HELMET STORAGE

Four (4) OnScene Solutions Talon model helmet storage bracket(s) shall be provided and installed in the cab driving or crew area. The helmet mounting will comply with the 9G NFPA requirements. Helmet brackets shall be mounted on the completed unit, locations as per the Kremmling Fire Protection District.

CAB CRASH TEST CERTIFICATION

A cab crash test certification from the fire apparatus manufacturer shall be provided with the equipment. A copy of this certification shall be included with the bid.

NOTE: There shall be no exception to any portion of the cab integrity certification requirements. Nonconformance shall lead to immediate rejection of bid.

The certification shall state that the cab does meet or exceed the requirements below:

- 1) European Occupant Protection Standard ECE Regulation No. 29.
- 2) SAE J2422 Cab Roof Strength Evaluation - Quasi-Static Loading Heavy Trucks.

Kremmling Fire Protection District

Medium Rescue

Production Specification

CAB MIRRORS, DRIVER ADJUSTABLE

Section 14.3.5 of the NFPA 1901 Standards, 2009 edition, requires all primary rear view mirrors used by the driver to be adjustable from the driver's position.

ADD LOWER SECOND COLOR

The cab exterior (door jambs not painted unless specified otherwise) shall be re-painted with a second color over the main cab color from the bottom of the glass down with PPG Delfleet Evolution paint.

Color: Red

Paint Number: Ford #213

PAINT DOOR JAMBS JOB COLOR

The chassis door jambs will be painted to match the exterior color of the chassis.

The interior of the chassis wheel wells shall be sprayed with black automotive undercoating. Undercoating shall cover all of the painted areas of the wheel well area to cover the upper cab color.

CHASSIS PAINT WARRANTY

The portion of the cab re-painted shall be provided with a ten (10) year, non-prorated paint warranty to the original owner. The warranty shall be provided by PPG Inc. A warranty sheet with all conditions and maintenance procedures shall be provided with the delivered vehicle.

CAB STEP AND FUEL TANK COVER

The stock chassis step and fuel tank brackets shall be overlaid with 1/8" aluminum tread plate covers. The stepping surface of the covers will be overlaid with a non-slip NFPA approved stepping surface. There will be a removable panel to access and replace the chassis batteries and a hinged fuel fill access door.

The following options will be cut into the step cover:

BATTERY CHARGING RECEPTACLE

The battery charging receptacle and or display panel will be located in the front upper corner of the battery step cover. This is for the location only the battery charger and receptacle must be purchased separately or with the chassis.

BATTERY JUMPER STUDS

Two (2) battery jumper studs, one (1) positive with a red weather cover, and one (1) negative with a black weather cover shall be provided in the lower front portion of the driver step area. Jumper studs will be identified with color coded label.

The studs will allow this vehicle to be jump started in an emergency situation due to battery failure or to allow easy access to assist another vehicle.

Kremmling Fire Protection District

Medium Rescue

Production Specification

STEP COMPARTMENT BELOW CREW DOOR

One (1) step storage compartment will be provided behind step covers below the cab crew door on the drivers side of the chassis. The compartment shall be ventilated and accessed through hinged door opening with stainless steel hinge and door latching assembly. The compartment shall be as large as possible and still meet 8" min. step depth for entering cab.

The specified Amkus ARRSI winch system shall in the compartment. The storage box for Amkus unit is 24" x 19.5" x 14", and weighs 66 lbs. If space does not allow for storage of the unit in the carrying case, the winch shall be removed from the case and mounting provisions shall be supplied to allow the winch to be secured in the compartment.

MUDFLAPS

There shall be rubber mudflaps furnished and installed behind each set of tires.

AIR BRAKE SYSTEM QUICK BUILD-UP

The air brake quick build-up system shall be supplied from the specified automatic electric compressor in order to maintain full operating air pressure while the vehicle is not running.

The quick buildup system shall provide sufficient air pressure so that the apparatus has no brake drag and is able to stop under the intended operating conditions following the 60-second buildup time.

ROAD EMERGENCY SAFETY KIT

One (1) set of three (3) dual faced triangular warning flares with fold away base complete with storage case per DOT requirements shall be provided with the completed apparatus.

One (1) 2.5 lb. ABC type vehicle fire extinguisher with bracket per DOT requirements shall be provided with the completed apparatus.

CAB INTERIOR CABINET - CENTER REAR WALL

One (1) Lista drawer cabinet model CL-0600-0402N-NB-RG-LG-IDL. The drawer cabinet shall be 27-1/2" high x 22-3/16" wide x 22-1/2" deep. The cabinet shall have four (4) individual locking drawers. The drawers shall have usable heights as follows: one (1) 3", two (2) 5", and one (1) 7". The cabinet shall be Light Gray in color and include a Phonelic Resin top. Storage provisions shall be provided under the cabinet for four (4) collapsible traffic cones.

BODY DESIGN

The importance of public safety associated with emergency vehicles requires that the construction of this vehicle meet the following specifications. These specifications are written to establish the minimum level of quality and design. All Bidders shall be required to meet these minimum requirements.

It is the intent of these specifications to fully describe the requirements for a custom built emergency type vehicle. In order to extend the expected service life of this vehicle, the body module shall be removable from the chassis frame and be capable of being installed on a new chassis.

The sheet metal material requirements, including alloy and material thickness, throughout the specifications are considered to be a minimum. Since such materials are available to all Manufacturers, the material specifications shall be strictly adhered to.

Kremmling Fire Protection District

Medium Rescue

Production Specification

The fabrication of the body shall be formed sheet metal. Formed components shall allow the Kremmling Fire Protection District to have the body repaired locally in the case where any object has struck the body and caused damage. The use of proprietary extrusions will prevent the Kremmling Fire Protection District from such repair and shall NOT be used.

Following construction of the subframe, which supports the apparatus body, the sheet metal portion of the body shall be built directly on the subframe. The joining of the subframe and body shall be of a welded integral construction.

The sheet metal fabrication of the body shall be performed using inert gas continuous feed welders only. The entire body shall be welded construction. The use of pop rivets in any portion of structural construction may allow premature failure of the body structure. Therefore, pop rivets shall NOT be used in the construction of the structural portions of the body. This includes side body sheets, inner panels of compartment doors, and any other structural portions of the body.

EXTERIOR ALUMINUM BODY

The fabrication of the body shall be constructed from aluminum 3003H-14 alloy smooth plate. This shall include compartment front panel, vertical side sheets, side upper rollover panels, rear panels and compartment door frames.

The body compartment floors and exterior panels shall be constructed with not less than 3/16" (.187) aluminum 3003H-14 smooth plate. Interior compartment dividing walls shall be constructed with not less than 1/8" (.125) aluminum 3003H-14 smooth plate. Lighter gauge sheet metal will not be acceptable in these areas, No Exceptions.

The front and rear corners of body shall be formed as part of the front or rear body panels. This provides a stronger body corner and finished appearance. The use of extruded corners, or caps will not be acceptable, No Exceptions.

The door side frame openings shall be formed "C" channel design. An electrical wiring conduit raceway running the full length of exterior compartments shall be provided. This raceway shall contain all 12 volt wiring running to the rear of the apparatus, permitting easy accessibility to wiring.

Individual compartment modules, with dead air space voids between compartments, will not be an acceptable method of compartment construction.

The compartments shall be an integral part of the body construction. Compartment floors from front of body to ahead of rear axle, also from rear axle to rear of body shall be single one-piece sections. Compartment floors shall be preformed, then positioned in body and welded into final position.

Compartment floors shall have a "sweep-out" design with door opening threshold positioned lower than compartment floor, permitting easy cleaning of compartments. Angles, lips, or door moldings are not acceptable in the base of compartment door opening. One-way rubber drain valves shall be provided in compartment floors so that a water hose may be used to flush-out compartment area.

All exterior seams in sheet metal below frame, and around the rear wheel well area shall be welded continuous to prevent moisture from entering compartments. All other interior seams and corners shall be sealed with silicone based caulk prior to painting.

Only stainless steel bolts, nuts, and sheet metal screws shall be used in mounting exterior trim, hardware and equipment.

Exterior compartments shall have louvers in lower back wall of compartment for ventilation.

DRIP RAILS

The body shall have drip rails over the side full height compartments. The drip rails shall be formed into the upper body panels providing a ridged lower panel and a flat upper body panel surface. The use of mechanically fastened, taped or glued on drip rails will not be acceptable, No Exceptions.

Kremmling Fire Protection District

Medium Rescue

Production Specification

ROOF CONSTRUCTION

The roof shall be integral with the body and shall be all welded construction. The roof of the body shall not be less than 3/16" aluminum 3003H-14 alloy tread plate, fully and continuously welded. The roof shall be reinforced with 2" x 2" x 1/4" aluminum tubing running the full width of the body.

All seams in the roof area shall be welded to the radius and supports prior to paint to prevent entry of moisture. All roof seams shall be continuously welded.

A 2" formed radius shall be provided along the body sides. The use of extruded radius will not be acceptable, No Exceptions.

BODY SUBFRAME

The chassis frame rails shall be fitted with 1/4" custom extruded UHMW polyethylene rail cap to isolate the body frame members from direct contact with chassis frame rails.

The body subframe shall be constructed from 6061T6 aluminum alloy tubing. Subframe shall consist of two (2) 2" x 4" x 1/4" aluminum tubes minimum, the same width as the chassis frame rails. Welded to this tubing shall be cross members of 2" x 4" x 1/4" aluminum. Smaller dimension, lighter gauge tubing or angle material subframe shall not be accepted.

These cross members shall extend the full width of the body to support the compartments. Cross members shall be located at front and rear of the body, below compartment divider walls, and in front and rear of wheel well opening. Additional aluminum cross members shall be located on 16" centers, or as necessary to support walkway or heavy equipment.

To form the frame, the tubing shall be beveled and welded at each joint using 5356 aluminum alloy welding wire.

BODY MOUNTING

The body subframe shall be fastened to the chassis frame with a minimum of four (4) spring loaded body mounts. Each mount shall be configured using a two-piece encapsulated slide bracket. The two (2) brackets shall be fabricated of heavy duty 1/4" thick steel and shall have a powder coat finish to prevent any corrosion. Each mounting assembly shall utilize two (2) 3/4" diameter x 6" long grade 8 bolts and two (2) heavy duty springs. The assembly design shall allow the body and subframe to act as one (1) component, separate from the chassis. As the chassis frame twists under driving conditions, the spring mounting system shall eliminate any stress from being transferred into the body. The spring loaded body mounts shall also prevent frame side rail or body damage caused by unevenly distributed stress and strains due to load and chassis movement.

Body mountings that do not allow relief from chassis movement will not be acceptable.

12" REAR STEP BUMPER

The full width rear bumper shall be constructed from 2" x 2" x 1/4" aluminum tubing frame and covered with 3/16" NFPA compliant aluminum tread plate. The bumper shall extend from the rear vertical body panel 12" and provide a rear step with a minimum of 1/2" space at body for water drainage.

REAR TOW EYES

There shall be two (2) heavy duty rear mounted tow eyes securely attached to the body subframe, below the apparatus body. The tow eyes shall be fabricated from 3/4" thick steel plate and shall have a black powder coat finish.

Kremmling Fire Protection District

Medium Rescue

Production Specification

GROUND LIGHTS

Two (2) OnScene Solutions 9" LED Nightstik ground lights shall be mounted below the bumper.

There shall be two (2) OnScene Solutions 9" LED NightStik light(s) installed below bumper capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting shall be switchable but activated automatically when headlights are activated and vehicle park brake is set.

WHEEL WELL EXTERIOR PANEL

The exterior panel of the body wheel well enclosure shall be constructed from 3/16" smooth aluminum panels.

DIEFORMED BEADED EDGE BODY FENDERS

A die formed beaded edge shall be provided along the radius of the wheel well opening for a finished appearance.

WHEEL WELL LINERS

The wheel wells shall be provided with an easily removable polymer, circular inner fender liner. The inner liner shall be bolted to the wheel well with stainless steel bolts and spaced away from the wheel well so the liner will not accumulate dirt or water.

SPLASH SKIRT

Each wheel well liner (cab and body) shall be provided with a inner back skirt or panel to assist in preventing road slush from splashing on under body components.

SCBA CYLINDER COMPARTMENTS

There shall be four (4) SCBA cylinder storage compartments, two (2) on each side of body in the rear wheel well area. Each compartment shall have a brushed SST door assembly with a positive catch latch. Each compartment shall have a 8" diameter tube behind the wheel well panel attached to the door assembly. Each compartment shall allow the storage of an SCBA cylinder up to 7-3/4" in diameter. The door shall activate the "Hazard Warning Light" in the cab when not in the closed position.

ALUMINUM BODY PAINT SPECIFICATIONS

BODY PAINT PREPARATION

After the body and components have been fabricated they shall be disassembled prior to painting so when the vehicle is complete there shall be finish paint beneath the removable components. The body shall be totally removed from chassis during the paint process to insure the entire unit is covered. The body and components shall be metal finished as follows to provide a superior substrate for painting.

The exterior body shall undergo a thorough cleaning process starting with a biodegradable phosphoric acid solution to begin the etching process followed by a complete clear water rinse. The next step shall consist of a chemical conversion coating applied to seal the metal substrate and become part of the metal surface for greater film adhesion. If the compartment interior is to be painted the interior shall be acid etched as described above then primed with an epoxy primer and all seams caulked.

All bright metal fittings, if unavailable in stainless steel or polished aluminum, shall be chrome plated. Iron fittings shall be copper under plated prior to chrome plating.

Kremmling Fire Protection District

Medium Rescue

Production Specification

PAINT PROCESS

The paint process shall follow the strict standards set forth by PPG Industries guidelines. Painters applying PPG products will be PPG Certified Commercial Technicians, and re-certified every two (2) years.

The body shall go through an eight-stage paint process;

- 1) Clean bare metal using a solvent base wax & grease remover.
- 2) Finish all exterior body seams as necessary, followed by a thorough sanding of all bare metal to be painted.
- 3) Re-clean bare metal using a solvent base wax & grease remover.
- 4) Bare Metal Epoxy Primer Coat - PPG Delfleet® Evolution corrosion resistance epoxy primer to be applied at 1.0-2.0 mills DFT over clean abraded bare metal.
- 5) Primer Filler Coat - PPG Delfleet® Evolution urethane build primer to achieve total thickness of 3.0-6.0 mills DFT after sanding.
- 6) Base coat (Color) - PPG Delfleet® Evolution High Solids Polyurethane Base coat. Apply 1.0-3.0 mills DFT of base coat color to achieve full hiding.
- 7) Clear coat PPG Delfleet® Evolution polyurethane premium quality clear coat with improved mar resistant finish. The clear coat shall be applied to achieve a total dry film thickness of 2.0-3.0 mills.
- 8) Curing process of the painted body shall go through a force dry/bake cycle process. The painted components shall be baked 180 degrees for 2 hours to achieve a complete coating cure on the finished product.

MACHINE POLISHED

After the force dry/bake cycle and ample cool down time, the coated surface shall be sanded using 1,000, 1,500, and or 3,000 grit sandpaper to remove surface defects. In the final step, the surface shall be buffed then polished to an extra high gloss smooth finish. Total dry film thickness of paint will average between 8.0-12.0 mils.

PAINT - ENVIRONMENTAL IMPACT

The contractor shall meet or exceed all current State (his) regulations concerning paint operations. Pollution control shall include measures to protect the atmosphere, water and soil. PPG Delfleet® Evolution paint shall be free of all heavy metal (lead & chromate) components. Paint emissions from sanding and painting shall be filtered and collected. All paint wastes shall be disposed of in an environmentally safe manner. Solvents used in cleanup operations shall be collected, sent off-site for distillation and returned for reuse.

PAINT FINISH - SINGLE COLOR

The body shall be painted with a single color of PPG Delfleet® Evolution paint per approved customer sprayout.

Prior to the assembly and reinstallation of exterior components; i.e. warning and DOT lights, handrails, steps, door hardware, and miscellaneous items, an isolation tape, or gasket shall be used to prevent damage to the finish painted surfaces. These components shall be fastened to body using either a plastic insert into body metal with stainless steel screws or zinc coated nuts into body surface using stainless steel bolts to prevent corrosion from dissimilar metals.

Touch-up paint shall be provided with completed vehicle.

- Paint Color: Match cab/chassis supplied paint color.

BODY UNDERCOATING

The entire underside of body shall be sprayed with black automotive undercoating. Undercoating shall cover all areas underside of body and wheel well area to help prevent corrosion under the vehicle.

Kremmling Fire Protection District

Medium Rescue

Production Specification

UNDERCOAT WARRANTY

The body undercoating shall have a warranty provided by the manufacturer for the lifetime of the vehicle or twenty (20) years, whichever occurs first. The warranty shall be transferable between vehicle owners. Should the undercoating material applied to the underside of the body and wheel wells of the vehicle ever flake off, peel, chip or crack due to drying out, the damaged area shall be re-sprayed without charge to the vehicle owner.

PAINT WARRANTY

The vehicle shall be provided with a ten (10) year non-prorated warranty to the original owner. Warranty is provided by PPG Inc. A warranty sheet with all conditions and maintenance procedures shall be provided with the delivered vehicle.

COMPARTMENT INTERIOR FINISH

The compartment interiors shall be treated with phosphoric acid and then sprayed with an epoxy primer applied 1.0 mil thick. All body seams will be caulked with urethane seam sealer and painted with two (2) coats of textured Zolatone paint. Zolatone catalysts will be added to the Zolatone to help in resisting moisture and provide a more durable finish. Paint color shall be gray.

ROOF COMPARTMENT INTERIOR FINISH

The roof compartments shall be treated with phosphoric acid and then sprayed with an epoxy primer will be applied 1.0 mil thick. All body seams will be caulked with urethane seam sealer and painted with two (2) coats of textured Zolatone paint. Zolatone catalysts will be added to the Zolatone to help in resisting moisture and provide a more durable finish. Paint color shall be gray.

REFLECTIVE STRIPE REQUIREMENTS

Material

All retroreflective materials shall conform to the requirements of ASTM D 4956, *Standard Specification for Retroreflective Sheeting for Traffic Control*, Section 6.1.1 for Type I Sheeting.

All retroreflective materials used that are colors not listed in ASTM D 4956, Section 6.1.1, shall have a minimum coefficient of retroreflection of 10 with observation angle of 0.2 degrees and entrance angle of -4 degrees.

Any printed or processed retroreflective film construction used shall conform to the standards required of an integral colored film as specified in ASTM D 4956, Section 6.1.1.

Minimum Requirements

A retroreflective stripe(s) shall be affixed to at least 50 percent of the cab and body length on each side, excluding the pump panel areas, and at least 25 percent of the width of the front of the apparatus.

The stripe or combination of stripes shall be a minimum of 4 in. (100 mm) in total width.

The 4 in. (100 mm) wide stripe or combination of stripes shall be permitted to be interrupted by objects (i.e., receptacles, cracks between slats in roll up doors) provided the full stripe is seen as conspicuous when approaching the apparatus.

Kremmling Fire Protection District

Medium Rescue

Production Specification

REFLECTIVE STRIPE - CAB SIDE

The reflective stripe material shall be 6" wide, 3M Scotchcal 680 series.

- This reflective stripe shall be white in color.

There shall be a 1" Scotchcal reflective stripe located 1" above and a second 1" Scotchcal reflective stripe located 1" below the main stripe.

- This reflective stripe shall be blue in color.

CHEVRON STRIPE - CAB BUMPER

A reflective stripe shall be affixed to the front of cab. The stripe or combination of stripes shall be a minimum of 4 in. (100 mm) in total width.

The approximate 10" wide Chevron retroreflective stripe shall be affixed to at least 25 percent of the width of the front of the apparatus with retroreflective striping in a chevron pattern sloping downward and away from the centerline of the vehicle at an angle of 45 degrees. Each stripe shall be 6" width. Chevron panels shall have a 3M UV over laminate to protect from UV rays, scene damage, and everyday use. Chevron panels shall have a minimum 10 year warranty for material failure, and colorfastness.

- The stripe material shall be 3M Scotchlite Diamond Grade.

All retroreflective materials required shall conform to the requirements of ASTM D 4956, *Standard Specification for Retroreflective Sheeting for Traffic Control*, Section 6.1.1 for Type I Sheeting.

This reflective chevron stripe shall alternate red and fluorescent yellow-green in color.

REFLECTIVE STRIPE - CAB DOOR INTERIOR

Any door of the apparatus designed to allow persons to enter or exit the apparatus shall have at least 96 in.2 (62,000 mm2) of retroreflective material affixed to the inside of the door.

The stripe material shall be 3M Scotchlite 680.

- This reflective stripe shall be white in color.

REFLECTIVE STRIPE - BODY SIDES

The reflective stripe material shall be 6" wide, 3M Scotchcal 680 series.

- This reflective stripe shall be white in color.

There shall be a 1" Scotchcal reflective stripe located 1" above and a second 1" Scotchcal reflective stripe located 1" below the main stripe.

- This reflective stripe shall be blue in color.

The stripe shall extend straight back from the chassis and then, ahead of the rear wheels, it shall form a "Z" and then extend straight back to the rear of the body.

Kremmling Fire Protection District

Medium Rescue

Production Specification

CHEVRON REFLECTIVE STRIPE - REAR SIDES PANELS

At least 50 percent of the rear-facing vertical surfaces, visible from the rear of the apparatus, excluding any pump panel areas not covered by a door, shall be equipped with retroreflective striping in a chevron pattern sloping downward and away from the centerline of the vehicle at an angle of 45 degrees. Each stripe shall be 6" width.

The rear side panels only of the body shall have a Chevron style reflective stripe layout, and cover as much of the rear side panels as possible. Chevron panels shall have a 3M UV over laminate to protect from UV rays, scene damage, and everyday use. Chevron panels shall have a minimum 10 year warranty for material failure, and colorfastness.

The stripe material shall be 3M Diamond Grade.

This reflective chevron stripe shall alternate red and fluorescent yellow-green in color.

LETTERING

The following lettering shall be furnished and installed on the completed unit:

SIDE CAB DOOR LETTERING

There shall be twenty three (23) 4" high SuperGold letters furnished and installed on the vehicle. Lettering shall have a clear 3M UV Protective Over Laminate applied before installation.

The lettering shall state: 'KREMMLING FIRE DEPARTMENT'

UPPER BODY SIDE LETTERING

There shall be six (6) 6" high SuperGold letters with ½" black outline furnished and installed on the vehicle. Lettering shall have a clear 3M UV Protective Over Laminate applied before installation.

The lettering shall state: "419".

CUSTOM DECAL LOGO - 12" -18"

Two (2) custom designed 12" - 18" Scotchcal type retroreflective logo shall be provided and located on the completed vehicle. The exact design and/or artwork shall be provided by the Kremmling Fire Protection District prior to construction.

Kremmling Fire Protection District

Medium Rescue

Production Specification

EXTERIOR COMPARTMENT DOORS

ROLL-UP DOOR CONSTRUCTION - ROBINSON (ROM)

The apparatus shall be equipped with Robinson ROM Series III roll-up exterior compartment doors. Robinson roll-up doors shall be complete with the following features;

- Doors shall be front roll with drum positioned at upper front portion of compartment to afford maximum clearances and head room for mounting equipment to ceiling of compartment
- There shall be a non-abrasive side brush seals
- Every slat must have interlocking end shoes to prevent slat from moving side-to-side and binding the door
- Between each slat must be a co-extruded PVC inner seal to prevent metal-to-metal contact and to repel moisture. This inner seal is not visible to detract from appearance of door
- Slat are to have interlocking joints with a folding locking flange to provide security and prevent penetration by sharp objects
- Slat to be double-wall extrusion 1.366" high by .315" thick. Exterior surface to be flat and interior surface to be concave to prevent loose equipment from interfering with door operation
- Latch system to be a full width one piece lift bar operable by one (1) hand
- A 2" wide finger pull integrated into the bottom rail extrusion for easy one (1) hand opening and closing
- Clip system that connects the curtain slats to the operator drum which allows for easy tension adjustment without tools
- Each roll-up door shall have a 4" diameter counterbalance operator drum to assist in lifting the door.
- Track shall be one-piece aluminum that has an attaching flange and finishing flange incorporated into its design
- Drip rail will have specially designed seal that prevents the seal from scratching the door
- Bottom rail extrusion must have smooth back to prevent loose equipment from jamming the door
- Bottom rail to have "V" shaped double seal to prevent water and debris from entering the compartment
- Standard replacement parts to be shipped from the United States and available in as little as 48 hours

Each shutter door shall decrease the compartment door frame opening approximately 2.00" in width and approximately 4.50" in height for the bottom section of door assembly.

The specified retroreflective stripe material shall be applied on the roll-up compartment doors. The stripe shall be precision machine cut for each door slat of the roll-up doors. Under no circumstance will the stripe material be cut on roll-up door surface.

Kremmling Fire Protection District

Medium Rescue

Production Specification

BODY HEIGHT MEASUREMENTS

The vertical body dimensions shall be as follows:

AHEAD OF REAR AXLE

	<u>Description</u>	<u>Dimension</u>
A	Bottom of Subframe to Top of Body	74.0"
B	Bottom of Subframe to Bottom of Body	25.0"
C	Vertical Door Opening	
	-with roll-up door	51.0"
	-with hinged door	18.0"

ABOVE REAR AXLE

	<u>Description</u>	<u>Dimension</u>
D	Vertical Door Opening - Above Rear Wheel	
	-with roll-up door	34.0"
	-with hinged door	37.0"

BEHIND REAR AXLE

	<u>Description</u>	<u>Dimension</u>
E	Bottom of Subframe to Bottom of Body	20.0"
F	Vertical Door Opening	
	-with roll-up door	51.0"
	-with hinged door	18.0"

GENERAL

	<u>Description</u>	<u>Dimension</u>
G	Bottom of Drip Rail to Top of Body	23.5"

(Dimensions are generic and subject to change during the actual design process)

TWO (2) UPPER BODY COMPARTMENTS (INDIVIDUAL)

There shall be two (2) compartments parallel to the sides of the body, one (1) on each side. Each of these compartments shall be 96.0" long x 28.0" wide x 18.5" deep. The side compartments shall be open under each door sill to allow for long equipment. Each compartment shall be integral with the body construction, and will not be bolted or add-on modules. The outside walls of each compartment will be double walled to prevent equipment from denting the outside painted surface.

Each compartment shall have a lift-up type compartment door hinged on the outboard side. Each door shall be fabricated from 3/16" aluminum tread plate. Each door shall have two (2) pneumatic type cylinders, one (1) at each end, attached to cast aluminum brackets mounted to the interior surface of the door to hold the door in both the opened and closed positions. Each door shall be mounted using 16" long, equally spaced, 14 gauge stainless steel hinges, with 1/4" stainless steel pin. A polyester barrier film gasket shall be placed between stainless steel hinge and the body mounting surface as necessary to prevent corrosion caused by dissimilar metals.

Each compartment door shall overlap a 2" vertical lip on the body roof to prevent entry of moisture and sealed with automotive type rubber molding to provide a weather resistant seal.

Each roof compartment door shall have a chrome 7" handle bolted to center of each door.

Each compartment shall have a horizontally mounted OnScene Solutions LED Night Stik on the underside of the door. The light and NFPA Door Ajar System shall be automatically activated by an individual switch per compartment.

Kremmling Fire Protection District

Medium Rescue

Production Specification

UPPER BODY WALKWAY

A 34" wide, upper body walkway shall be provided at the center of body and recessed into the roof structure. The walkway shall be fabricated from NFPA compliant 3/16" aluminum tread plate with continuously welded seams to prevent moisture penetration into apparatus body, No Exceptions. The walkway shall be supported with 2" x 2" x 1/4" aluminum tubing on 12" centers.

13/16" drains shall be installed at front of walkway connected to 1" flexible drain tubes that will terminate below the body.

WALKWAY/STEP LIGHTS

There shall be two (2) OnScene Solutions 9" LED NightStik lights provided to illuminate the walkway or step area. The lights shall be activated when the parking brake is set.

Each light shall be mounted in a ball burnished cast aluminum housing to protect against damage from personnel or equipment.

Lighting shall provide illumination at a minimum level of 2 fc (20 lx) on all work surfaces, steps, and walkways. Lighting shall be switchable but activated automatically when headlights are activated and vehicle park brake is set.

ACCESS LADDER

The top of the body shall be accessible from the ground by a folding ladder. The ladder design will have a main ladder section and a folding lower step section for better angle of departure. Ladder stores in a folded position and then pulls out to a comfortable climbing angle. The ladder shall be parallel to the body when in the stored position.

Each cast aluminum step shall be 4-1/2" deep x 16" wide. Hand railing shall be 2-1/8" oval shaped aluminum tubing with a ribbed gripping surface. The ladder shall be wired to the door ajar warning light in cab to warn the driver that the ladder is in the down position. Ladder shall be mounted to body with stainless steel bolts. Ladder shall be located on rear curbside of the body.

ROOF ACCESS HANDRAIL

There shall be one (1) handrail mounted on top of body to assist in roof access. Handrails shall be NFPA compliant 1-1/4" extruded aluminum tubing with chrome plated end stanchions.

BODY WIDTH DIMENSIONS

The body shall be 100.0" wide, not including drip rail or non-permanent fixtures. Interior compartment depth dimensions shall be approximately:

<u>Area Description</u>	<u>Dimension</u>
Transverse Area above Subframe	95.0"
Compartment Depth below Subframe	24.5"

Kremmling Fire Protection District

Medium Rescue

Production Specification

STREETSIDE COMPARTMENT - FRONT (S1)

The interior useable compartment width shall be approximately 59.0" wide.


The compartment door opening shall be approximately 52.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- There shall be NO keyed lock on this roll-up compartment door.

A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum shelf-trac for specified component installation.
 - There shall be one (1) 1,000 lbs. slide-out tray(s) with a SlideMaster painted structural steel base approximately 46" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Each slide base shall have a gravity latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".
 - There shall be one (1) 250 lbs. slide-out and tilt down tray(s) with a SlideMaster painted structural steel base approximately 46" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and will be vertically adjustable in height. Each slide base shall have a gravity latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".
 - There shall be one (1) heavy duty, 46" deep slide-out vertical tool board(s). Each tool board shall utilize a SlideMaster painted structural steel slide rails and shall be rated at 1,000 lbs. with a gravity latch which will lock the tray in the closed and full extension positions. Each tool board shall be as tall as the compartment space allows. The vertical panel of the tool board shall be fabricated from 3/16" (.188) aluminum 3003H-14 alloy smooth aluminum plate.
 - There shall be one (1) vertical compartment partition dividing the compartment into left and right sides. The partition shall be located between the specified 1,000 lbs. slide-out tray and tool board.
-  There shall be one (1) transverse module fabricated from 3/16" (.188) 3003H-14 aluminum alloy smooth sheet. The module will be designed for the following long tools and equipment:
- One (1) Kremmling Fire Protection District supplied backboard(s). Manufacturer, model number and dimensions of the backboard(s) shall be provided during the pre-construction meeting.
 - There shall be one (1) OnScene Solutions cargo straps provided to secure the stored equipment.

Kremmling Fire Protection District

Medium Rescue

Production Specification

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- One (1) Hannay ECR1616-17-18 electric cable reel(s) capable of storing 150' of 10/3 electric cable. Reel(s) shall be designed to hold 110% of the capacity of cord length, with fully enclosed 45 amp, three (3) conductor collector rings. Reel(s) shall be mounted to channel structure that allows for side-to-side adjustment of reel position.
 - Power rewind control(s) shall be in a position where the operator can observe the rewinding operation and not be more than 72 in. (1830 mm) above the operator's standing position, and shall be marked with a label indicating its function.
 - A label shall be provided in a visible location adjacent to reel with following information: Current rating, Current type, Phase, Voltage, and Total cord length.
 - The cable reel shall be equipped with 150' of 10/3 SEOW black cable, a molded plastic ball clamp, and a single heavy duty L5-30 twist-lock female plug at the end.
- One (1) Akron model EJB, cast aluminum electrical power distribution box with yellow powder coat painted finish shall be provided. The power distribution box shall meet all requirements described in NFPA 1901. The power distribution box shall include:
 - A 12" pigtail that terminates in an L5-30 configuration to match the cable on the cord reel. The outlet configuration shall include:
 - One (1) 5-20 duplex straight-blade receptacle
 - One (1) 5-20 duplex straight-blade receptacle
 - One (1) 5-20 duplex straight-blade receptacle
 - One (1) 5-20 duplex straight-blade receptacle
- One (1) Akron EJB treadplate vertical apparatus mounting bracket shall be provided.
 - The fairlead roller shall be mounted directly to the reel.
- One (1) OnScene Solutions 63" LED Nightstik compartment light, vertically mounted.
- The controls for the specified light tower(s).
- The light tower controller shall be supplied with an additional long length of cord to allow for operation from the front or rear of the apparatus. The cord shall be designed to be used in-line with the existing control cord and removed as needed.
- The 12 volt electrical distribution panel shall be located in the streetside front lower compartment.

Kremmling Fire Protection District

Medium Rescue

Production Specification

STREETSIDE COMPARTMENT - ABOVE REAR WHEELS (S2)

The interior useable compartment width shall be approximately 59.0" wide.

The compartment door opening shall be approximately 52.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- There shall be NO keyed lock on this roll-up compartment door.

A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT



- There shall be vertically mounted aluminum shelf-trac for specified component installation.



- There shall be one (1) heavy duty, swing-out style tool board(s) approximately 47" long. Each tool board shall be mounted on a frame constructed of 2" x 2" x 1/4" aluminum tubing. Each tool board shall have heavy duty door type hinges and a spring loaded latch. The tool board shall utilize a gas piston assembly to secure the board in the full extension position. The tool board shall be rated for a maximum evenly distributed load of 200 lbs.
 - The tool board material shall be PAC Trac double face 7040 extrusion with the tracks in a horizontal orientation.
- There shall be two (2) Zico 1000 series KD-UH walkaway type SCBA air pack bracket(s) with high cycle coated spring clips and angled foot plate (no CRS strap inc.) provide on the back wall of the compartment. The brackets shall be spaced to allow for the storage of two (2) Kremmling Fire Protection District supplied SCBA packs with cylinders.
- There shall be two (2) Kremmling Fire Protection District supplied Zico 1000 series KD-UH walkaway type SCBA air pack bracket(s) with high cycle coated spring clips and angled foot plate (no CRS strap inc.) installed on the back wall of the compartment. The brackets shall be spaced to allow for the storage of two (2) Kremmling Fire Protection District supplied SCBA packs with cylinders.
- One (1) OnScene Solutions 36" LED Nightstik compartment light, vertically mounted.

Kremmling Fire Protection District

Medium Rescue

Production Specification

STREETSIDE COMPARTMENT - REAR (S3)

The interior useable compartment width shall be approximately 41.0" wide.

The compartment door opening shall be approximately 34.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- There shall be NO keyed lock on this roll-up compartment door.

A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum shelf-trac for specified component installation.
- There shall be two (2) adjustable shelf/shelves approximately 24" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges
- There shall be one (1) 250 lbs. slide-out and tilt down tray(s) with a SlideMaster painted structural steel base approximately 24" deep and as wide as the compartment layout or door opening permits, located above the level of the chassis frame rails. Each slide base shall have a gravity latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".



Storage for Kremmling Fire Protection District supplied stokes basket ~~and back board~~ shall be located on lower transverse compartment floor.



- The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
- One (1) OnScene Solutions 63" LED Nightstik compartment light, vertically mounted.



- Mounting provisions for one (1) Kremmling Fire Protection District supplied gas powered hydraulic power unit(s).
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

Kremmling Fire Protection District

Medium Rescue

Production Specification

CURBSIDE COMPARTMENT - FRONT (C1)

The interior useable compartment width shall be approximately 59.0" wide.

The compartment door opening shall be approximately 52.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- There shall be NO keyed lock on this roll-up compartment door.

A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum shelf-trac for specified component installation.
- There shall be two (2) adjustable shelf/shelves approximately 46" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges
- There shall be one (1) 1,000 lbs. slide-out tray(s) with a SlideMaster painted structural steel base approximately 46" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Each slide base shall have a gravity latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 1/2".
- There shall be one (1) transverse module(s) which extends to the opposite side of the body. (Specified in opposite side compartment.)
 - There shall be one (1) OnScene Solutions cargo straps provided to secure the stored equipment.
- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- One (1) Hannay EF1520-17-18 low pressure air hose reel(s) capable of storing 200' of low pressure air hose. The rewind button for each reel shall be located adjacent to the reel it controls.
 - The hose reel shall equipped with 200' of 3/8 low pressure air hose. Molded plastic ball clamp shall be provided on the hose to stop it at the 4-way roller. The hose shall be Red in color.
 - The air reel supply shall be from one (1) 6,000 psi ASME cylinder located in the curbside upper body compartment. A removable panel shall be provided over the cylinder to prevent inadvertent damage due to items stored in the compartment.
 - A reel shut-off valve, pressure regulator, and 0-150 psi gauge shall be provided on an aluminum control panel next to the air reel.
 - The fairlead roller shall be mounted directly to the reel.

Kremmling Fire Protection District

Medium Rescue

Production Specification

- One (1) OnScene Solutions 63" LED Nightstik compartment light, vertically mounted.
- One (1) 120/240 VAC load center.
- The generator gauge panel.

Kremmling Fire Protection District

Medium Rescue

Production Specification

CURBSIDE COMPARTMENT - ABOVE REAR WHEEL (C2)

The interior useable compartment width shall be approximately 59.0" wide.

The compartment door opening shall be approximately 52.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- There shall be NO keyed lock on this roll-up compartment door.

A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.


COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum shelf-trac for specified component installation.
- There shall be one (1) 1,000 lbs. slide-out tray(s) with a SlideMaster painted structural steel base approximately 30" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Each slide base shall have a gravity latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 1/2".
 - One (1) OnScene Solutions 36" LED Nightstik compartment light, vertically mounted.
- One (1) Rosenbauer Ultra High Pressure Fire Extinguishing System located on the compartment floor. The system shall include the following components:
 - Honda 24 HP gas engine
 - 20 GPM pump (at 1450 PSI)
 - Continuous foam proportioning system (0-6%)
 - Rapid intervention hose reel with 200' of 5/8" high pressure hose
 - Combination full jet, spray jet, and foam extension nozzle
- The Honda supplied fuel tank shall be removed from the engine and a Koplin Fuel Pack (PN 89135) attached to the side compartment wall shall be plumbed to the engine in place of the factory supplied tank.
- The Rosenbauer supplied hose reel shall be removed from the pump skid assembly and mounted to the compartment roof.
- One (1) UPF Poly-Tank ® IIE water tank located in the transverse area of the compartment, between S2 and C2. The water tank capacity shall be approximately 200 U.S. gallons. Certification of the tank capacity shall be recorded on the manufacturer's record of construction and shall be provided to the purchaser upon delivery of the apparatus. The tank construction shall comply with NFPA 1901 and have a lifetime warranty from UPF.
- One (1) Akron Brass 8000 series, 1-1/2" valve(s) shall be provided for a direct tank fill.
 - The valve(s) shall be controlled with a handle for direct valve operation.

Kremmling Fire Protection District

Medium Rescue

Production Specification

- One (1) Innovative Controls 10-LED water tank level gauge(s) for indicating water tank level. The tank level gauge shall indicate the liquid level on an easy to read display. Each tank level gauge system shall include:
 - A pressure transducer that is mounted on the outside of the tank in an easily accessible area.
 - A super bright LED bar graph display with a visual alarm at 1/4 of a tank. The display shall also provide an output to activate an audible alarm or secondary visual alarm at 1/4 of a tank.
 - A set of weather resistant connectors to connect the digital display to the pressure transducer and to the apparatus power.
-  • There shall be provisions provided for the storage of one (1) Kremmling Fire Protection District supplied five (5) gallon foam bucket in the compartment. The provisions shall include a stainless steel base with 1" upturned lips on all sides, and one (1) OnScene Solutions cargo strap.
 - The provision must be capable of storing all styles of foam buckets.

Kremmling Fire Protection District

Medium Rescue

Production Specification

CURBSIDE COMPARTMENT - REAR (C3)

The interior useable compartment width shall be approximately 41.0" wide.

The compartment door opening shall be approximately 34.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- There shall be NO keyed lock on this roll-up compartment door.

A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum shelf-trac for specified component installation.
- There shall be one (1) adjustable shelf/shelves approximately 24" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges



The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.

- One (1) OnScene Solutions 63" LED Nightstik compartment light, vertically mounted.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

Kremmling Fire Protection District

Medium Rescue

Production Specification

REAR COMPARTMENT - CENTER (RC1)

The rear center compartment shall be closed to both side rear compartments.

The rear center compartment shall start at the bottom of the body and shall be as high as the body permits. The frame shall extend at least 20" into the Rear Center Compartment to allow for the spring mounts.

The interior useable compartment width shall be approximately 45.0" wide.



The compartment door opening shall be approximately 38.0" wide.

This compartment shall have a ROM roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- There shall be NO keyed lock on this roll-up compartment door.

A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum shelf-trac for specified component installation.
- There shall be one (1) 250 lbs. slide-out and tilt down tray(s) with a **SlideMaster** painted structural steel base approximately 36" deep and as wide as the compartment layout or door opening permits, located above the level of the chassis frame rails. Each slide base shall have a gravity latch which will lock the tray in the closed and full extension positions. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".
- Mounts will be supplied and installed for one (1) Kremmling Fire Protection District supplied Holmatro 4350 hydraulic ram(s).
- Mounts will be supplied and installed for one (1) Kremmling Fire Protection District supplied Holmatro 4050 NCT hydraulic cutter(s).
- Mounts will be supplied and installed for one (1) Kremmling Fire Protection District supplied Holmatro 4242 hydraulic spreader(s).
- Mounting provisions for two (2) Kremmling Fire Protection District supplied 50' Holmatro CORE hydraulic hose sections. Hose sections shall be mounted on radiused hangers located on the compartment walls.
- One (1) OnScene Solutions 63" LED Nightstik compartment light, vertically mounted.

Kremmling Fire Protection District

Medium Rescue

Production Specification

PLASTIC FLOOR AND SHELF TILE

All compartment floors, shelves, and trays shall be covered with Dri-Dek plastic interlocking grating.

- The plastic floor tile shall be black.
- The plastic edge trim shall be black.

ROPE TIE-OFF OR PORTABLE WINCH RECEIVERS

The completed unit shall have an integrated receiver system for use with rope rescue accessories and/or electric winch components when specified. Each receiver shall have the following load rating:

	<u>STRAIGHT PULL</u>	<u>SAFETY FACTOR</u>
Rope Tie Off:	600 LBS.	15:1
Winch:	1,000 LBS	4:1

The following items shall be provided to accomplish rope rescue and/or portable winch operations:

- Two (2) rope accessory receiver(s) shall be furnished and installed on the body roof. The receiver shall be manufactured using 1/4" wall receiver tube and 1/2" steel plate. The receiver assembly shall be powder coat painted. Each receiver shall have hitch pin provided to lock the rope accessory in place. Body reinforcements shall be added to the roof to increase the structural integrity and to provide a weight rating of 600 lbs. working load and 9000 lbs. maximum load using a 15:1 safety factor to match 1/2" diameter rope ratings.
- Two (2) rope tie off anchor accessories shall be provided with the completed vehicle. Each anchor accessory shall include a hitch pin to lock it in place. The tie off anchor accessories shall have an eyelet for use with a rope rescue carabineer. A mounting bracket shall be provided to store each rope tie off accessory in a body compartment as close to receiver as possible.
- There shall be two (2) receiver tube(s) located at the front bumper for use with rope tie-off accessory and/or a portable electric winch.
 - There shall be one (1) rubber cover / plug for the receiver.
 - There shall be one (1) 110 VAC outlet receptacle(s) provided. The outlet shall be a 20 amp, straight-blade (NEMA 5-20R) for use with the Kremmling Fire Protection District supplied Amkus rope rescue winch system.

Kremmling Fire Protection District

Medium Rescue

Production Specification

LOW VOLTAGE ELECTRICAL SYSTEM- 12 VDC

General

Any low voltage electrical systems or warning devices installed on the fire apparatus shall be appropriate for the mounting location and intended electrical load.

Where wire passes through sheet metal, grommets shall be used to protect wire and wire looms. Electrical connections shall be with double crimp water-tight heat shrink connectors.

All 12 VDC wiring running from front to back of vehicle body shall be run in full length electrical wiring raceway down each side of body.

Wiring

All electrical circuit feeder wiring supplied and installed by the fire apparatus manufacturer shall meet the requirements of NFPA Chapter 13.

The circuit feeder wire shall be stranded copper or copper alloy conductors of a gauge rated to carry 125 % of the maximum current for which the circuit is protected. Voltage drops in all wiring from the power source to the using device shall not exceed 10 %. The use of star washers for circuit ground connections shall not be permitted.

All circuits shall otherwise be wired in conformance with SAE J1292, *Automobile, Truck, Truck-Tractor, Trailer, and Motor Coach Wiring*.

Wiring and Wire Harness Construction

All insulated wire and cable shall conform to SAE J1127, *Low Voltage Battery Cable*, or SAE J1128, *Low Voltage Primary Cable*, type SXL, GXL, or TXL.

All conductors shall be constructed in accordance with SAE J1127 or SAE J1128, except where good engineering practice dictates special strand construction. Conductor materials and stranding, other than copper, shall be permitted if all applicable requirements for physical, electrical, and environmental conditions are met as dictated by the end application. Physical and dimensional values of conductor insulation shall be in conformance with the requirements of SAE J1127 or SAE J1128, except where good engineering practice dictates special conductor insulation. The overall covering of conductors shall be moisture-resistant loom or braid that has a minimum continuous rating of 194°F (90°C) except where good engineering practice dictates special consideration for loom installations exposed to higher temperatures. The overall covering of jacketed cables shall be moisture resistant and have a minimum continuous temperature rating of 194°F (90°C), except where good engineering practice dictates special consideration for cable installations exposed to higher temperatures.

All wiring connections and terminations shall use a method that provides a positive mechanical and electrical connection. The wiring connections and terminations shall be installed in accordance with the device manufacturer's instructions. All ungrounded electrical terminals shall have protective covers or be in enclosures. Wire nut, insulation displacement, and insulation piercing connections shall not be used.

Wiring shall be restrained to prevent damage caused by chafing or ice buildup and protected against heat, liquid contaminants, or other environmental factors.

Wiring shall be uniquely identified at least every 2 ft (0.6 m) by color coding or permanent marking with a circuit function code. The identification shall reference a wiring diagram.

Kremmling Fire Protection District

Medium Rescue

Production Specification

Circuits shall be provided with properly rated low voltage overcurrent protective devices. Such devices shall be readily accessible and protected against heat in excess of the overcurrent device's design range, mechanical damage, and water spray. Circuit protection shall be accomplished by utilizing fuses, circuit breakers, fusible links, or solid state equivalent devices.

If a mechanical-type device is used, it shall conform to one of the following SAE standards:

- 1) SAE J156, *Fusible Links*
- 2) SAE J553, *Circuit Breakers*
- 3) SAE J554, *Electric Fuses (Cartridge Type)*
- 4) SAE J1888, *High Current Time Lag Electric Fuses*
- 5) SAE J2077, *Miniature Blade Type Electrical Fuses*

Switches, relays, terminals, and connectors shall have a direct current (dc) rating of 125 % of maximum current for which the circuit is protected.

Power Supply

A 12 V or greater electrical alternator shall be provided. The alternator shall have a minimum output at idle to meet the minimum continuous electrical load of the vehicle, at 200°F (93°C) ambient temperature within the engine compartment, and shall be provided with full automatic regulation.

Minimum Continuous Electrical Load

The minimum continuous electrical load shall consist of the total amperage required to simultaneously operate the following in a stationary mode during emergency operations:

- 1) The propulsion engine and transmission
 - All legally required clearance and marker lights, headlights, and other electrical devices except windshield wipers and four-way hazard flashers
 - The radio(s) at a duty cycle of 10 percent transmit and 90 % receive (for calculation and testing purposes, a default value of 5 A continuous)
 - The lighting necessary to produce 2 fc (20 lx) of illumination on all walking surfaces on the apparatus and on the ground at all egress points onto and off the apparatus, 5 fc (50 lx) of illumination on all control and instrument panels, and 50 percent of the total compartment lighting loads
 - The minimum optical warning system, where the apparatus is blocking the right-of way
 - The continuous electrical current required to simultaneously operate any fire pumps, aerial devices, and hydraulic pumps
 - Other warning devices and electrical loads defined by the purchaser as critical to the mission of the apparatus

If the apparatus is equipped to tow a trailer, an additional 45 A shall be added to the minimum continuous electrical load to provide electrical power for the federally required clearance and marker lighting and the optical warning devices mounted on the trailer.

The condition of the low voltage electrical system shall be monitored by a warning system that provides both an audible and a visual signal to persons on, in, or near the apparatus of an impending electrical system failure caused by the excessive discharge of the battery set.

The charge status of the battery shall be determined either by direct measurement of the battery charge or indirectly by monitoring the electrical system voltage.

Kremmling Fire Protection District

Medium Rescue

Production Specification

If electrical system voltage is monitored, the alarm shall sound if the system voltage at the battery or at the master load disconnect switch drops below 11.8 V for 12 V nominal systems, 23.6 V for 24 V nominal systems, or 35.4 V for 42 V nominal systems for more than 120 seconds.

A voltmeter shall be mounted on the driver's instrument panel to allow direct observation of the system voltage.

Electromagnetic Interference

Electromagnetic interference suppression shall be provided, as required, to satisfy the radiation limits specified in SAE J551/1, *Performance Levels and Methods of Measurement of Electromagnetic Compatibility of Vehicles, Boats (up to 15 m), and Machines (16.6 Hz to 18 GHz)*.

Wiring Diagram

A complete electrical wiring schematic of actual system shall be provided with finished apparatus. Similar or generic type electrical schematics shall NOT BE ACCEPTABLE.

Low Voltage Electrical System Performance Test

A low voltage electrical system test certification shall be provided with delivered apparatus.

Kremmling Fire Protection District

Medium Rescue

Production Specification

12 VOLT MULTIPLEX CONTROL CENTER

The apparatus shall be equipped with a Weldon V-MUX multiplexed 12 volt electrical system that will provide complete diagnostic capability, No Exception. The system shall have the capability of delivering multiple signals via a CAN bus, utilizing specifications set forth by SAE J1939. The system shall be node based to maximize stability so that failure of one node does not affect the operation of the other nodes. The system shall use shielded twisted-pair wire for transmission of system function signals. The shielded wire shall provide protection against EMI and RFI noise interruptions.

The multiplex system shall be responsible for providing power management functions as well as load shedding. The warning light system shall be controlled by the multiplex system. The system shall be capable of displaying text and/or graphic messages on a display module. The system shall be based on solid-state technology and shall include self-contained diagnostic indicators.

Outputs:

The outputs shall perform all the following items without added modules to perform any of the tasks;

1. **Load Shedding:** The system shall have the capability to load shed with 8 levels any output. This means you can specify which outputs (barring NFPA restrictions) you would like load shed. Level 1 12.9v, Level 2 12.5V, Level 3 - 12.1V, Level 4 - 11.7V, Level 5 11.3V, Level 6 10.9V, Level 7 10.5, Level 8 10.1. Unlike conventional load shedding devices you can assign a level to any or all outputs.
2. **Load Sequencing:** The system shall be able to sequence from 0 8 levels any output. With 0 being no delay and 1 being a 1 second delay, 2 being a 2 second delay and so on. Sequencing reduces the amount of voltage spikes and drops on your vehicle, and can help limit damage to your charging system.
3. **Output Device:** The system shall have solid-state output devices. Each solid-state output shall be a MOS-FET (Metal Oxide Semiconductor - Field Effect Transistors); MOS-FETs are solid-state devices with no moving parts to wear out. A typical relay when loaded to spec has a life of 100,000 cycles. The life of a FET is more than *100 times* that of a relay.
4. **Flashing Outputs:** The system shall be able to flash any output in either A or B phase, and logic is used to shut down needed outputs in park, or any one of several combined interlocks. The flash rate can be selected at either 80, 160 or 200 FPM. This means any light can be specified with a multiplex truck with no need to add flashers. Flashing outputs can also be used to warn of problems or other unique idea you may come up with.
5. **PWM:** The modules shall have the ability to PWM at some outputs so that a headlight PWM module is not needed.
6. **Diagnostics:** An output should be able to detect either a short or open circuit. The system should be able report in "real time" a text based message that points the maintenance person to a specific output.

Inputs:

1. The inputs shall have the ability to switch by a ground or vbatt signal.
2. The inputs shall be filtered for noise suppression via hardware and software so that RF or dirty power will not trick an input into changing its status.

Auto-Throttle:

The multiplex system shall be able to perform automatic high idle via a network gateway or by using an existing output on a module to provide the proper signals to an OEM Engine ECU. This task should be handled with existing inputs and outputs.

Kremmling Fire Protection District

Medium Rescue

Production Specification

Displays:

Displays shall be able to provide real time information regarding load shedding and system status, such as network traffic/errors or shorts and open circuits.

System Network:

The multiplex system shall contain a Peer-to-Peer network. A Master Slave Type network is not suitable for this type of unit. A Peer-to-Peer network means that all the modules are equal on the network; a Master is not needed to tell other nodes when to talk, **No Exceptions.**

System Reliability:

The multiplex system shall be able to perform in extreme temperature conditions, from 40° to +85° C (-40° to +185° F.) The system shall be sealed against the environment, moisture, humidity, salt or fluids such as diesel fuel, motor oil or brake fluid. The enclosures shall be rugged to withstand being mounted in various locations or compartments around the vehicle. The modules shall be protected from over voltage and reverse polarity.

WELDON CERTIFICATION

A letter shall be provided with bid submittal that the Contractor has successfully completed the Weldon training requirements for Level 1 of the V-MUX Certified Supplier Program and is authorized to design, build, and service V-MUX electrical systems.

MULTIPLEX SYSTEM VISTA IV V-MUX COLOR DISPLAY

One (1) Weldon V-MUX Vista IV shall be provided. The Vista IV shall have seven switches with custom legends and a wide temperature operating range. The four wires shall control all lighting and HVAC. The Vista IV shall have color changes for button status. The display shall be pre-programmable (OEM Level) and be colored. The auto climate control shall display temperature set point and outside temperatures. The Vista IV shall be ready for back-up camera, thermal cameras and DVDs. Virtual switches, GPS, on-board diagnostics, 6" and 9" Pana Vise options and large font size shall also be included.

The Vista IV allows for peer to peer networking. The Vista IV shall have the ability to automatically change screens based on a predetermined state or condition for warning message or status.

MULTIPLEX DOWNLOADER AND DIAGNOSTIC KIT

Provided with the completed apparatus shall be one (1) multiplex downloader and diagnostic kit. The diagnostic software and all necessary connections will allow the operator to easily troubleshoot components of the multiplex system. The downloader portion will allow the operator to download changes from Weldon or the OEM's electrical department as necessary for troubleshooting and repairs. The kit shall be contained in a small waterproof carry case.

The V-Mux display shall be located in the cab center console for control of all master and emergency lights.

CAB CONSOLE

A center cab console shall be provided between the Driver's and Officer's seats. Console shall be as large as possible and fabricated of 1/8" smooth aluminum. A textured powder coat paint finish shall be provided for durability and finished appearance.

The rear portion of the console shall be provided with open top storage for notebooks or maps. Two (2) adjustable dividers shall be provided in the storage area. The forward portion of console shall be slanted for easy viewing of the V-Mux display screen, and any siren or radio equipment. The area shall be within easy access to both Driver and Officer.

Kremmling Fire Protection District

Medium Rescue

Production Specification

BATTERY SYSTEM

The battery connectors shall be heavy duty type with cables terminating in heat shrink loom. Heavy duty battery cables shall provide maximum power to the electrical system. Where required, the cables shall be shielded from exhaust tubing and the muffler. Large rubber grommets shall be provided where cables enter the battery compartment.

Batteries shall be of the high-cycle type. With the engine off, the battery system shall be able to provide the minimum continuous electrical load for 10 minutes without discharging more than 50 percent of the reserve capacity and then to restart the engine. The battery system cold cranking amps (CCA) rating shall meet or exceed the minimum CCA recommendations of the engine manufacturer. The batteries shall be mounted to prevent movement during fire apparatus operation and shall be protected against accumulations of road spray, snow, and road debris. The batteries shall be readily accessible for examination, testing, and maintenance.

A means shall be provided for jump-starting the engine if the batteries are not accessible without lifting the cab of a tilt-cab apparatus.

Where an enclosed battery compartment is provided, it shall be ventilated to the exterior to prevent the buildup of heat and explosive fumes. The batteries shall be protected against vibration and temperatures that exceed the battery manufacturer's recommendation.

A master load disconnect switch shall be provided between the starter solenoid(s) and the remainder of the electrical loads on the apparatus. The starter solenoids shall be connected directly to the batteries.

Electronic control systems and similar devices shall be permitted to be otherwise connected if so specified by their manufacturer.

The alternator shall be wired directly to the batteries through the ammeter shunt(s), if one is provided, and not through the master load disconnect switch.

A green "battery on" pilot light that is visible from the driver's position shall be provided.

A sequential switching device shall be permitted to energize the optical warning devices and other high current devices required in minimum continuous electrical load, provided the switching device shall first energize the electrical devices required in minimum continuous electrical load within 5 seconds.

BATTERY SWITCH

One (1) battery "On/Off" switch in cab located within easy reach of Driver with green "BATTERY ON" pilot light that is visible from the driver's position shall be provided.

BATTERY SOLENOID

Battery switch shall consist of a minimum 200 ampere, constant duty solenoid to feed from positive side of battery.

Kremmling Fire Protection District

Medium Rescue

Production Specification

BATTERY CHARGER

One (1) Newmar model EV-20 battery charger shall be provided ideal for charging multiple battery bank systems. The Newmar Phase Three "Smart" battery charging technology provides significant benefits over traditional float chargers whose output voltage droops under heavy loads, and fails to attain proper voltage levels recommended by battery manufactures as part of a proper charge cycle. These issues are particular significant in Emergency Vehicle applications where rapid recharge is required while powering DC loads, and reliable service life of batteries is critical. PT Series chargers feature multiple isolated outputs to charge independent battery banks.

Features;

- "Smart" circuitry provides three stage charging—bulk, absorption, float
- Gel-Cell/Flooded Lead-acid/AGM battery type switch selects optimum charge/float voltages
- Multiple isolated outputs - charge independent battery banks*
- Optional sensor adjusts output voltage based on battery temperature*
- Current limiting - charges dead batteries without overload
- Use as a power supply; can power Radios/MDT's without a battery in line
- Built to last—rugged stainless steel case with circuitry hardened for hostile environments
- Remote meter included

CHASSIS AIR SHORE PUMP

One (1) Newmar ACP-12, 12 volt, 80 psi air compressor shall be provided and installed to maintain air pressure in chassis air brake system.

SHORE POWER INLET

One (1) Kussmaul 120 VAC, 30 amp Super Auto-Eject shore power inlet(s) shall be provided. The shore power connection shall automatically disengage from vehicle when chassis ignition is engaged.

The protective ground from the shoreline inlet shall be bonded to the vehicle frame.

- The outlet cover shall be yellow.
- The shore power plug shall be located near the Driver door area.

ENGINE COMPARTMENT LIGHT

There shall be one (1) light(s) mounted in the engine compartment with integral switch with a light output of at least 20 candlepower (250 lumens). The engine compartment light(s) shall operate only when the master battery switch is turned "On".

Kremmling Fire Protection District

Medium Rescue

Production Specification

CAB SPOTLIGHT

There shall be two (2) Golight Radioray 2020 motorized spotlight(s) provided on the front corners of the cab roof, one (1) per side. The light(s) shall operate via a wired dash mount controller with joystick and on/off button. The joystick controls the motorized 135 degree tilt of the spotlight and the motorized rotation of the light a full 370 degrees. The light continues to move while the joystick is pressed. Once any button is released, the spotlight remains locked in that position until the joystick is moved again. The dash controller also turns the light on and off, so no additional switches are required. The dash mounted remote control allows for fingertip operation and is hard wired to the searchlight.

The Radioray is mounted to the surface of vehicle via 4 screws and a rubber gasket for a quick, safe and secure attachment.

The Cr5 Pentabeam II technology combines a five-sided parabolic reflector with an axial filament Phillips H-9 bulb. This 5,000,000 Adjusted Retail Candle Power (400,000 Industrial Candlepower) configuration generates an extremely bright beam to penetrate dark spots, cast a broad spectral pattern and reach distances of 700 feet.

CAB HAZARD WARNING LIGHT

A red flashing or rotating light, located in the driving compartment, shall be illuminated automatically whenever the vehicles parking brake is not fully engaged and any of the following conditions exist:

- Any passenger or equipment compartment door is not closed.
- Any ladder or equipment rack is not in the stowed position.
- Stabilizer system is not in its stowed position.
- Powered light tower is not stowed.
- Any other device permanently attached to the apparatus is open, extended, or deployed in a manner that is likely to cause damage to the apparatus if the apparatus is moved.

Compartments and equipment meeting all of the following conditions shall be permitted to be exempt from being wired to the hazard light:

- The volume is less than or equal to 4 ft³ (0.1 m³).
- The compartment has an opening less than or equal to 144 in.² (92,900 mm²).
- The open door does not extend sideways beyond the mirrors or up above the top of the fire apparatus.
- All equipment in the compartment is restrained so that nothing can fall out if the door is open while the apparatus is moving.
- Manually raised pole lights with an extension of less than 5 ft (1.5 m).

The hazard light shall be labeled "DO NOT MOVE APPARATUS WHEN LIGHT IS ON".

An audible alarm shall be provided for the door ajar light.

BACK-UP ALARM

The body manufacturer shall furnish and install one (1) 107 dB(A) electronic back-up alarm. Back-up alarm to actuate automatically when the transmission gear selector is placed in reverse.

REAR VIEW CAMERA

There shall be one (1) Voyager rear observation camera system provided and installed on the apparatus. The system shall include one (1) color camera installed on the rear the body. The image shall be displayed on the Vista display located within the Driver's range of view.

Kremmling Fire Protection District

Medium Rescue

Production Specification

TAIL LIGHTS

Rear body tail lights shall be vertically mounted per Federal Motor Vehicle Safety Standards. The following lights shall be furnished:

- Two (2) Whelen amber LED 600 Series 60A00TAR turn signal lights
- Two (2) Whelen red LED 600 Series 60R00XRR stop/tail lights
- Two (2) Whelen LED 600 Series 60C00WCR maximum intensity back-up lights with clear lens

Each of the lights above shall be mounted in a 6EFLANGE, chrome finish bezel.

MIDSHIP MARKER/TURN SIGNAL

Two (2) Whelen LED midship body clearance marker/turn signal lights (T0A00MAR) shall be installed. There shall be one (1) light on each side of the body, in the wheel well, ahead of the rear axle. Both lights shall have an amber lens and operate with the chassis clearance marker and turn signals.

MARKER LIGHTS

The apparatus body shall be equipped with all necessary clearance lights and reflectors in accordance with Federal Motor Vehicle Safety Standards (FMVSS) regulations. All body clearance lights shall be Truck-Lite Model 18 LED to reduce the need for maintenance and lower the amp draw. Clearance lights shall be wired to the headlight circuit of the chassis.

CAB STEP LIGHTS / GROUND LIGHTS

There shall be four (4) OnScene Solutions 9" LED NightStik light(s) installed on the vehicle capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting designed to provide illumination on areas under the driver and crew riding area exits shall be switchable but activated automatically when the exit doors are opened.

LICENSE PLATE LIGHT

One (1) Arrow #437 chrome plated LED license plate light shall be installed on the rear of the body. License plate light shall be wired to the headlight circuit of chassis. A fastener system shall be provided for license plate installation.

ELECTRONIC SIREN

One (1) Whelen model 295SLSA1 electronic siren control with standard hard wired microphone and user programmable siren tones shall be provided in cab. Siren to be installed in cab within easy access of Driver.

SIREN SPEAKER

One (1) Cast Products Inc. model SAP/D-4307 100 watt siren speaker shall be provided, recessed in the front bumper.

- The siren speaker shall be located on the curbside of front bumper.

Kremmling Fire Protection District

Medium Rescue

Production Specification

BROW MOUNT FLOODLIGHT(S) - LED

There shall be one (1) Whelen Pioneer Plus model PCP2 dual combination floodlight, and 8 degree spotlight on front of cab. Light(s) quantity shall be divided equally per side. Light(s) shall be 12 VDC, 12 amp, 150 watt, with 7,000/7,000 useable lumens.

Each light shall be mounted in a PBA0130, 3" adjustment radius with either a straight out, 0 degree or a 15 degree downward angle.

The lights shall be switched at the 12 volt control panel in the cab.

SIDE SCENE LIGHTS - LED

There shall be four (4) Whelen Pioneer Plus model PCP2 dual combination floodlight and 8 degree spotlight on the upper body sides. Light quantity shall be divided equally per side. Lights shall be 12 VDC, 12 amp, 150 watt, with 7,000/7,000 useable lumens.


Each light shall be mounted in PBA203 mounting bracket, semi recessed into the apparatus body with chrome trim ring housing. The light mounts will provide either a straight out, 0 degree or a 15 degree downward angle.

The lights shall be switched at the Vista display in the cab.

REAR SCENE LIGHTS - LED

Two (2) Whelen Pioneer Plus PCP2 dual combination floodlight and 8 degree spotlights shall be located on the upper rear body panel sides. The lights shall be 12 VDC, 12 amp, 150 watt, with 7,000/7,000 useable lumens.

The lights shall be mounted in PBA203 mounting brackets, semi recessed into the apparatus body with chrome trim ring housing. The light mounts will provide either a straight out, 0 degree or a 15 degree downward angle.

 A switch shall be provided on the curbside rear body panel adjacent to the specified ladder to allow the curbside light to be turned off and on when the ladder is in use.

The lights shall be switched at the Vista display in the cab.

The rear scene lights shall also be activated when the apparatus is in reverse.

TRAFFIC DIRECTIONAL LIGHT

One (1) Whelen TAM85, 47" eight (8) Super LED light, traffic directional warning device with 30' control cable shall be located on upper rear body. The control head shall be located in the cab within easy reach of Driver.

The traffic directional light shall be surface mounted on upper rear body.

Kremmling Fire Protection District

Medium Rescue

Production Specification

WARNING LIGHT PACKAGE

Each apparatus shall have a system of optical warning devices that meets or exceeds the requirements of this section.

The optical warning system shall consist of an upper and a lower warning level. The requirements for each level shall be met by the warning devices in that particular level without consideration of the warning devices in the other level.

For the purposes of defining and measuring the required optical performance, the upper and lower warning levels shall be divided into four warning zones. The four zones shall be determined by lines drawn through the geometric center of the apparatus at 45 degrees to a line drawn lengthwise through the geometric center of the apparatus. The four zones shall be designated A, B, C, and D in a clockwise direction, with zone A to the front of the apparatus.

Each optical warning device shall be installed on the apparatus and connected to the apparatus's electrical system in accordance with the requirements of this standard and the requirements of the manufacturer of the device.

A master optical warning system switch that energizes all the optical warning devices shall be provided.

The optical warning system on the fire apparatus shall be capable of two separate signaling modes during emergency operations. One mode shall signal to drivers and pedestrians that the apparatus is responding to an emergency and is calling for the right-of-way. One mode shall signal that the apparatus is stopped and is blocking the right-of-way. The use of some or all of the same warning lights shall be permitted for both modes provided the other requirements of this chapter are met.

A switching system shall be provided that senses the position of the parking brake or the park position of an automatic transmission. When the master optical warning system switch is closed and the parking brake is released or the automatic transmission is not in park, the warning devices signaling the call for the right-of-way shall be energized. When the master optical warning system switch is closed and the parking brake is on or the automatic transmission is in park, the warning devices signaling the blockage of the right-of-way shall be energized. The system shall be permitted to have a method of modifying the two signaling modes.

The optical warning devices shall be constructed or arranged so as to avoid the projection of light, either directly or through mirrors, into any driving or crew compartment(s). The front optical warning devices shall be placed so as to maintain the maximum possible separation from the headlights.

UPPER LEVEL OPTICAL WARNING DEVICES

The upper-level optical warning devices shall be mounted as high and as close to the corner points of the apparatus as is practical to define the clearance lines of the apparatus. The upper-level optical warning devices shall not be mounted above the maximum height, specified by the device manufacturer.

Kremmling Fire Protection District

Medium Rescue

Production Specification

ZONE A - FRONT WARNING LIGHTS

There shall be one (1) Whelen Edge FN72QLED LED 72" lightbar permanently mounted to the cab roof.

The lightbar configuration (streetside to curbside) shall be:

<u>SECTION</u>	<u>INTERNAL COMPONENTS</u>	<u>LENS COLOR</u>
1	Red Corner LED	Clear
2	Red Linear LED - Side Facing	Clear
3	Red Corner LED	Clear
4	Clear Linear LED	Clear
5	Blank	Clear
6	Red Linear LED	Clear
7	Blank	Clear
8	Blank	Clear
9	Blue Linear LED	Clear
10	Blank	Clear
11	Clear Linear LED	Clear
12	Blue Corner LED	Clear
13	Blue Linear LED - Side Facing	Clear
14	Blue Corner LED	Clear

Additionally, there shall be four (4) amber colored linear LED's with clear lenses provided on the rear of the lightbar.

All clear lights shut down when the parking brake is set to comply with "Blocking" mode requirements as outlined in NFPA 1901.

The lightbar shall be separately switched at the vista display in the cab.

ZONES B AND D - SIDE WARNING LIGHTS



UPPER REAR CORNER WARNING LIGHTS

There shall be two (2) Whelen 900 series (9" x 7") Red Linear Super-LED lights (90RR5FCR) provided, one (1) each side. Each light shall have a clear lens and chrome flange.

The lights shall be switched at the Vista display in the cab.

Kremmling Fire Protection District

Medium Rescue

Production Specification

ZONE C - REAR WARNING LIGHTS

There shall be one (1) Whelen 900 series (9" x 7") Red Linear Super-LED light (90RR5FCR) provided on the curbside. Each light shall have a clear lens and chrome flange.

The lights shall be switched at the Vista display in the cab.

There shall be one (1) Whelen 900 series (9" x 7") Amber Linear Super-LED lights (90AA5FCR) provided on the streetside. Each light shall have a clear lens and chrome flange.

The lights shall be switched at the Vista display in the cab.

LOWER LEVEL OPTICAL WARNING DEVICES

To define the clearance lines of the apparatus, the optical center of the lower-level optical warning devices in the front of the vehicle shall be mounted on or forward of the front axle centerline and as close to the front corner points of the apparatus as is practical.

The optical center of the lower-level optical warning devices at the rear of the vehicle shall be mounted on or behind the rear axle centerline and as close to the rear corners of the apparatus as is practical. The optical center of any lower-level device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground for large apparatus, and 18 in. and 48 in. (460 mm and 1220 mm) above level ground for small apparatus.

A midship optical warning device shall be mounted right and the left sides of the apparatus if the distance between the front and rear lower-level optical devices exceeds 25 ft (7.6 m) at the optical center. Additional midship optical warning devices shall be required, where necessary, to maintain a horizontal distance between the centers of adjacent lower-level optical warning devices of 25 ft (7.6 m) or less. The optical center of any midship mounted optical warning device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground.

ZONE A - FRONT WARNING LIGHTS

There shall be two (2) Whelen 600 series (6" x 4") Red/Blue split Linear Super-LED lights (60BR6FCR) provided, one (1) each side. Each light shall have a clear lens and chrome flange.

The lights shall be switched at the Vista display in the cab.

ZONES B AND D - CAB INTERSECTOR LIGHT (CAB FRONT CORNERS)

There shall be two (2) Whelen 600 series (6" x 4") Red/Blue split Linear Super-LED lights (60BR6FCR) provided, one (1) each side. Each light shall have a clear lens and chrome flange.

The lights shall be switched at the Vista display in the cab.



ZONES B AND D - BODY INTERSECTOR LIGHT (BODY REAR CORNERS)

There shall be two (2) Whelen 600 series (6" x 4") Red/Blue split Linear Super-LED lights (60BR6FCR) provided, one (1) each side. Each light shall have a clear lens and chrome flange.

The lights shall be switched at the Vista display in the cab.

Kremmling Fire Protection District

Medium Rescue

Production Specification

ZONE C - REAR WARNING LIGHTS (LOWER REAR CORNERS)

There shall be one (1) Whelen 600 series (6" x 4") red Linear Super-LED light (60R02FCR) provided on the streetside. Each light shall have a clear lens and chrome flange.

The lights shall be switched at the Vista display in the cab.

There shall be one (1) Whelen 600 series (6" x 4") amber Linear Super-LED light (60A02FCR) provided on the curbside. Each light shall have a clear lens and chrome flange.

The lights shall be switched at the Vista display in the cab.

Kremmling Fire Protection District

Medium Rescue

Production Specification

LINE VOLTAGE ELECTRICAL SYSTEM

ONAN PTO GENERATOR

The vehicle shall be equipped with an Onan Protec PTO generator system with a capacity of 20,000 watts at 120/240 VAC, 166/83 amps, single phase. Current frequency shall be stable at 60 hertz.

The transmission's PTO port and PTO, or the split shaft PTO, and all associated drive shaft components shall be rated to support the continuous duty torque requirements of the generator's continuous duty rating as stated on the power source nameplate.

Where the generator is driven by the chassis engine and transmission through a split shaft PTO, the driving compartment speedometer shall register when the generator drive system is engaged.

Where the generator is driven by the chassis engine and transmission through a split shaft PTO and a chassis transmission retarder is furnished, it shall be automatically disengaged for generator operations.

The direct drive generator shall be mounted so that it does not change the ramp breakover angle, angle of departure, or angle of approach as defined by other components, and it shall not extend into the ground clearance area.

The direct drive generator shall be mounted away from exhaust and muffler areas or provided with a heat shield to reduce operating temperatures in the generator area.

GENERATOR ENGAGEMENT

A "Generator Engaged" indicator shall be provided in the driving compartment to indicate that the generator shift has been successfully completed.

An "OK to Operate Generator" indicator shall be provided in the driving compartment to indicate that the generator is engaged (if not always engaged), the transmission is in the proper gear (if required, automatic transmissions only), and the parking brake is engaged (if applicable).

An interlock system shall be provided to prevent advancement of the engine speed in the driving compartment or at any operator's panel unless the parking brake is engaged, and the transmission is in neutral or the output of the transmission is correctly connected to a pump or generator instead of the drive wheels.

WARRANTY PERIOD

Provided such goods are operated and maintained in accordance with Onan's written instructions, Onan warrants that the Protec YDCR series PTO generators shall be free from defects in material and workmanship for a period of five (5) years or one thousand (1,000) hours, whichever comes first, from the date of delivery to the first purchaser.

GENERATOR SPLASH GUARD

A powder coat painted splash cover shall be installed to reduce the amount of road spray on the frame mounted PTO generator. A V-ring seal shall also be installed in the cover to provide additional protection against contaminants reaching the generator front seals.

GENERATOR MOUNTING

The generator shall be mounted between the chassis frame rails. The generator mounting brackets shall be fabricated using heavy duty steel tubing, or structural channel. The generator mounting shall be bolted and removable so that the generator can be lowered from under apparatus for service, if necessary. The generator case shall not extend below the bottom edge of the apparatus body.

Kremmling Fire Protection District

Medium Rescue

Production Specification

MANUALS AND SCHEMATICS

Two (2) complete manuals on parts list, maintenance, wiring schematics, hydraulic schematics, circuit boards, voltage regulator board and other components shall be provided on delivery.

POWER-TAKE-OFF GENERATOR DRIVE

There shall be a "Hot Shift" power-take-off (PTO) installed on the transmission PTO opening of the chassis. The "Hot Shift" PTO is provided to allow the engagement of the PTO at higher engine RPM speeds. The PTO output shall be connected to the generator through hollow tube type driveline with heavy duty universals.

The engagement of the PTO shall be in the chassis cab with a rocker switch and red pilot light to note engagement of the PTO.

The power supply to the PTO engagement control shall be wired to the parking brake and a neutral position transmission switch to prevent engagement unless the vehicle is stopped and transmission has been placed in neutral.

The installation of the engine, transmission, driven accessories (power takeoffs (PTO), etc.) shall meet the engine and transmission manufacturers' installation recommendations for the service intended.

Model part number shall be Chelsea 277XMFJPB5XD, 129% Ratio.

ENGINE SPEED CONTROL

An engine speed auxiliary control device (high idle switch or throttle) shall be installed to maintain a stable cycle output from generator when the apparatus is parked.

An interlock shall prevent the operation of the engine speed auxiliary control device unless the parking brake is engaged and the transmission is in neutral or park, or the parking brake is engaged and the engine is disengaged from the drive wheels.

The engine shall be prevented from regulating its own engine speed during times when engine rpm control is critical for consistent apparatus functions such as generator, water pump, or aerial operation.

GENERATOR MONITORING PANEL

To properly monitor the generator performance and load demand during operation, the generator installation shall be equipped with a full instrument monitor panel.

- Generator frequency in hertz
- Line 1 current in amperes
- Line 2 current in amperes
- Generator voltage in volts

The program shall support the accumulation of elapsed generator hours. Generator hours shall be displayed.

Kremmling Fire Protection District

Medium Rescue

Production Specification

LOADCENTER

The loadcenter shall be a Cutler Hammer, BR Series, specifically designed for protection and distribution of 120/240 volt AC, such as lighting and small motor branch circuits. The loadcenter enclosure shall be made of 16 gauge galvanized sheet steel. The galvanized coating provides corrosion protection and as such does not require paint. All trims used on the BR Loadcenter shall be chromate sealed and finished with electro disposition epoxy paint (ASA61) which exceeds requirements for outdoor and indoor applications. A combination surface/flush cover with integral door shall be supplied.

The loadcenter shall be UL / CSA listed, **NO EXCEPTIONS** will be allowed.

SHORE POWER INLET - BATTERY CHARGER

The above mentioned shore power inlet, and battery conditioner shall be specified in the 12 volt section.

OUTLETS AND CIRCUITS

The generator and or shore power shall supply the 120/240 volt electrical equipment and outlets outlined below. Proper circuit protection shall be installed as noted:

Two (2) 120 volt exterior outlets, one (1) each side near rear wheel well area.

- The receptacle(s) shall be 15 amp, straight-blade (NEMA 5-15R).

Two (2) 120 volt exterior outlets, one (1) each side rear of body.

- The receptacle(s) shall be 15 amp, straight-blade (NEMA 5-15R).

Kremmling Fire Protection District

Medium Rescue

Production Specification

LINE VOLTAGE ELECTRICAL SYSTEM

GENERAL REQUIREMENTS

Stability

Any fixed line voltage power source producing alternating current (ac) shall produce electric power at 60 Hz, ± 3 Hz when producing power at all levels between no load and full rated power. Any fixed line voltage power source shall produce electric power at the rated voltage ± 10 percent when producing power at all levels between no load and full rated power.

The maximum voltage supplied to portable equipment shall not exceed 275 volts to ground. Higher voltage shall be permitted only when used to operate fixed wired, permanently mounted equipment on the apparatus.

Conformance with National Electrical Code

All components, equipment, and installation procedures shall conform to *NFPA 70, National Electrical Code*, except where superseded by the requirements of this chapter. Where the requirements of this chapter differ from those in *NFPA 70*, the requirements in this chapter shall apply.

Where available, line voltage electrical system equipment and materials included on the apparatus shall be listed and used only in the manner for which they have been listed. All equipment and materials shall be installed in accordance with the manufacturer's instructions.

Location Ratings

Any equipment used in a dry location shall be listed for dry locations. Any equipment used in a wet location shall be listed for wet locations.

Any equipment, except a PTO-driven generator, used in an underbody or under chassis location that is subject to road spray shall be either listed as Type 4 or mounted in an enclosure that is listed as Type 4.

If a PTO-driven generator is located in an underbody or under chassis location, the installation shall include a shield to prevent road spray from splashing directly on the generator.

Grounding

Grounding shall be in accordance with 250.34(A) and 250.34(B) of *NFPA 70*. Ungrounded systems shall not be used.

Only stranded or braided copper conductors shall be used for grounding and bonding.

The grounded current-carrying conductor (neutral) shall be insulated from the equipment-grounding conductors and from the equipment enclosures and other grounded parts.

The neutral conductor shall be colored white or gray in accordance with 200.6, "Means of Identifying Grounded Conductors," of *NFPA 70*.

Any bonding screws, straps, or buses in the distribution panel board or in other system components between the neutral and equipment-grounding conductor shall be removed and discarded.

Kremmling Fire Protection District

Medium Rescue

Production Specification

Bonding

The neutral conductor of the power source shall be bonded to the vehicle frame. The neutral bonding connection shall occur only at the power source. In addition to the bonding required for the low voltage return current, each body and each driving or crew compartment enclosure shall be bonded to the vehicle frame by a copper conductor.

The conductor shall have a minimum ampere rating, as defined in 310.15, "Ampacities for Conductors Rated 0–2000 Volts," of *NFPA 70*, of 115 percent of the rated ampere on the power source specification label.

A single conductor that is sized to meet the low voltage and line voltage requirements shall be permitted to be used.

Ground Fault Circuit Interrupters

In special service vehicles incorporating a lavatory, sink, toilet, shower, or tub, 120 V, 15 or 20 A receptacles within 6 ft (1.8 m) of these fixtures shall have ground fault circuit interrupter (GFCI) protection. GFCIs integrated into outlets or circuit breakers or as stand-alone devices shall be permitted to be used in situations.

Power Source General Requirements

All power source system mechanical and electrical components shall be sized to support the continuous duty nameplate rating of the power source.

The power source shall be shielded from contamination that would prevent the power source from operating within its design specifications.

Power Source Rating

For power sources of 8 kW or larger, the power source manufacturer shall declare the continuous duty rating that the power source can provide when installed on fire apparatus according to the manufacturer's instructions and run at 120°F (49°C) air intake temperature at 2000 ft (600 m) above sea level.

The rating on the power source specification label shall not exceed the declared rating from the power source manufacturer.

Access shall be provided to permit both routine maintenance and removal of the power source for major servicing. The power source shall be located such that neither it nor its mounting brackets interfere with the routine maintenance of the fire apparatus.

Instrumentation

If the power source is rated at less than 3 kW, a "Power On" indicator shall be provided. If the power source is rated at 3 kW or more but less than 8 kW, a voltmeter shall be provided.

If the power source is rated at 8 kW or more, the following instrumentation shall be provided at an operator's panel:

- (1) Voltmeter
- (2) Current meters for each ungrounded leg
- (3) Frequency (Hz) meter
- (4) Power source hour meter

The instrumentation shall be permanently mounted at an operator's panel. The instruments shall be located in a plane facing the operator. Gauges, switches, or other instruments on this panel shall each have a label to indicate their function.

Kremmling Fire Protection District

Medium Rescue

Production Specification

The instruments and other line voltage equipment and controls shall be protected from mechanical damage and not obstructed by tool mounting or equipment storage.

An instruction plate(s) that provides the operator with the essential power source operating instructions, including the power-up and power-down sequence, shall be permanently attached to the apparatus at any point where such operations can take place.

Operation

Provisions shall be made for placing the generator drive system in operation using controls and switches that are identified and within convenient reach of the operator.

Where the generator is driven by the chassis engine and engine compression brakes or engine exhaust brakes are furnished, they shall be automatically disengaged for generator operations.

Any control device used in the generator system power train between the engine and the generator shall be equipped with a means to prevent unintentional movement of the control device from its set position in the power generation mode.

If there is permanent wiring on the apparatus that is designed to be connected to the power source, a power source specification label that is permanently attached to the apparatus at the operator's control station shall provide the operator with the information required.

The power source, at any load, shall not produce a noise level that exceeds 90 dBA in any driving compartment, crew compartment, or onboard command area with windows and doors closed or at any operator's station on the apparatus.

Power Supply Assembly

The conductors used in the power supply assembly between the output terminals of the power source and the main over current protection device shall not exceed 12 ft (4 m) in length.

All power supply assembly conductors, including neutral and grounding conductors, shall have an equivalent amperage rating and shall be sized to carry not less than 115 percent of the amperage of the nameplate current rating of the power source.

If the power supply assembly connects to the vibrating part of a generator (not a connection on the base), the conductors shall be flexible cord or other fine-stranded conductors enclosed in metallic or nonmetallic liquid tight flexible conduit rated for wet locations and temperatures not less than 194°F (90°C).

Overcurrent Protection

Manually resettable over current devices shall be installed to protect the line voltage electrical system components.

Power Source Protection

A main over current protection device shall be provided that is either incorporated in the power source or connected to the power source by a power supply assembly.

The size of the main over current protection device shall not exceed 100 percent of the rated amperage stated on the power source specification label or the rating of the next larger available size over current protection device, where so recommended by the power source manufacturer.

If the main over current protection device is subject to road spray, the unit shall be housed in a Type 4-rated enclosure.

Kremmling Fire Protection District

Medium Rescue

Production Specification

Branch Circuit Overcurrent Protection

Over current protection devices shall be provided for each individual circuit and shall be sized at not less than 15 amps in accordance with 240.4, "Protection of Conductors," of *NFPA 70*.

Any panel board shall have a main breaker where the panel has six or more individual branch circuits or the power source is rated 8 kW or larger.

Each over current protection device shall be marked with a label to identify the function of the circuit it protects.

Dedicated circuits shall be provided for any large appliance or device (air conditioning units, large motors, etc.) that requires 60 percent or more of the rated capacity of the circuit to which it is connected, and that circuit shall serve no other purpose.

Panelboards

All fixed power sources shall be hardwired to a permanently mounted panel board unless one of the following conditions exists:

- 1) All line voltage power connections are made through receptacles on the power source and the receptacles are protected by integrated over current devices.
- 1) Only one circuit is hardwired to the power source, which is protected by an integrated over current device.

The panel shall be visible and located so that there is unimpeded access to the panel board controls. All panel boards shall be designed for use in their intended location. The panel(s) shall be protected from mechanical damage, tool mounting, and equipment storage.

Where the power source is 120/240 V and 120 V loads are connected, the apparatus manufacturer or line voltage system installer shall consider load balancing to the extent that it is possible.

Wiring Methods

Fixed wiring systems shall be limited to the following:

- 2) Metallic or nonmetallic liquid tight flexible conduit rated at temperatures not less than 194°F (90°C) with stranded copper wire rated for wet locations and temperatures not less than 194°F (90°C)
- 1) Type SOW, SOOW, SEOW, or SEOOW flexible cord rated at 600 V and at temperatures not less than 194°F (90°C)

Electrical cord or conduit shall not be attached to chassis suspension components, water or fuel lines, air or air brake lines, fire pump piping, hydraulic lines, exhaust system components, or low voltage wiring and shall be arranged as follows:

- 2) Separated by a minimum distance of 12 in. (300 mm) from exhaust piping or shielded from such piping
- 1) Separated from fuel lines by a minimum distance of 6 in. (150 mm)

A means shall be provided to allow "flexing" between the driving and crew compartment, the body, and other areas or equipment whose movement would stress the wiring.

Electrical cord or conduit shall be supported within 6 in. (150 mm) of any junction box and at a minimum of every 24 in. (600 mm) of run.

Kremmling Fire Protection District

Medium Rescue

Production Specification

Supports shall be made of nonmetallic materials or of corrosion-resistant or corrosion-protected metal. All supports shall be of a design that does not cut or abrade the conduit or cord and shall be mechanically fastened to the apparatus.

Only fittings and components listed for the type of cord or conduit being installed shall be used.

Splices shall be made only in a listed junction box.

Additional Requirements for Flexible Cord Installations

Where flexible cord is used in any location where it could be damaged, it shall be protected by installation in conduit, enclosures, or guards.

Where flexible cord penetrates a metal surface, rubber or plastic grommets or bushings shall be installed.

Wiring Identification

Each line voltage circuit originating from the main panel board shall be identified.

The wire or circuit identification either shall reference a wiring diagram or wire list or shall indicate the final termination point of the circuit.

Where pre-wiring for future power sources or devices exists, the un-terminated ends shall be marked with a label showing their wire size and intended function.

Wiring System Components

Only stranded copper conductors with an insulation rated for temperatures of at least 194°F (90°C) and wet locations shall be used. Conductors in flexible cord shall be sized in accordance with Table 400.5(A) of *NFPA 70*. Conductors used in conduit shall be sized in accordance with 310.15, "Ampacities for Conductors Rated 0–2000 Volts," of *NFPA 70*. Aluminum or copper-clad aluminum conductors shall not be used.

All boxes shall conform to and be mounted in accordance with Article 314, "Outlet, Device, Pull, and Junction Boxes; Conduit Bodies; Fittings; and Manholes," of *NFPA 70*. All boxes shall be accessible using ordinary hand tools. Boxes shall not be permitted behind welded or pop-riveted panels.

The maximum number of conductors permitted in any box shall be in accordance with 314.16, "Number of Conductors in Outlet, Device, and Junction Boxes, and Conduit Bodies," of *NFPA 70*.

All wiring connections and terminations shall provide a positive mechanical and electrical connection. Connectors shall be installed in accordance with the manufacturer's instructions. Wire nuts or insulation displacement and insulation piercing connectors shall not be used.

Each switch shall indicate the position of its contact points (i.e., open or closed) and shall be rated for the continuous operation of the load being controlled. All switches shall be marked with a label indicating the function of the switch. Circuit breakers used as switches shall be "switch rated" (SWD) or better. Switches shall simultaneously open all associated line voltage conductors. Switching of the neutral conductor alone shall not be permitted.

Line voltage circuits controlled by low voltage circuits shall be wired through properly rated relays in listed enclosures that control all non-grounded current-carrying conductors.

Kremmling Fire Protection District

Medium Rescue

Production Specification

Receptacles and Inlet Devices

Wet and Dry Locations

All wet location receptacle outlets and inlet devices, including those on hardwired, remote power distribution boxes, shall be of the grounding type, provided with a wet location cover, and installed in accordance with Section 406.8, "Receptacles in Damp or Wet Locations," of *NFPA 70*.

All receptacles located in a wet location shall be not less than 24 in. (600 mm) from the ground. Receptacles on off road fire apparatus shall be a minimum of 30 in. (750 mm) from the ground. All receptacles located in a dry location shall be of the grounding type and shall be at least 12 in. (300 mm) above the interior floor height. No receptacle shall be installed in a face-up position.

The face of any wet location receptacle shall be installed in a plane from vertical to not more than 45 degrees off vertical.

Receptacle Label

Each receptacle shall be marked with a label indicating the nominal line voltage (120 volts or 240 volts) and the current rating in amps of the circuit. If the receptacle is DC or other than single phase, that information shall also be marked on the label.

All receptacles and electrical inlet devices shall be listed to UL 498, *Standard for Safety Attachment Plugs and Receptacles*, or other recognized performance standards.

Receptacles used for DC voltages shall be rated for DC service.

Wiring Schematics

An "As-Built" Wiring diagrams for line voltage systems shall be provided to include the following information;

- (1) Pictorial representations of circuit logic for all electrical components and wiring
- (2) Circuit identification
- (3) Connector pin identification
- (4) Zone location of electrical components
- (5) Safety interlocks
- (6) Alternator–battery power distribution circuits
- (7) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems

Kremmling Fire Protection District

Medium Rescue

Production Specification

120/240 VAC SCENE LIGHTING

COMMAND LIGHT TOWER WITH METAL HALIDE BULB OPTION AND LOWER BANK BACKLIGHT

The apparatus shall be equipped with one (1) all-electric Command Light(s). The unit shall not require tapping into vehicle braking system to be operated, eliminating the chance for vehicle brake problems. Hydraulic or pneumatic type floodlights are not acceptable alternatives to the all-electric light tower specified.

The light bank shall have four (4) weatherproof, 1,500 watt, 240-volt quartz halogen lights and (2) two 1,000 watt metal halide lights. Light heads shall be mounted in three (3) pairs, giving two (2) vertical lines of three (3) when the lights are in the upright position. Power for light bank shall be transmitted through power collecting rings thus allowing 360+ degree continuous rotation in either direction

The lower pair of light heads shall be capable of being rotated about a horizontal axis to provide light down on the vehicle or to the opposite side of the vehicle.

Positioning of the light bank shall be accomplished with maintenance free, heavy-duty 12-volt linear actuators.

The Command Light assembly shall be all aluminum construction, with stainless steel shafts and bronze bushings for long life and low maintenance.

Light tower shall be controlled with a hand-held umbilical line remote control. Command Light to be equipped with "Auto-Park" automatic nesting feature.

Command Light controls shall feature:

- Three (3) switches, one (1) for each light bank
- One (1) light bank rotation switch
- One (1) switch for elevating lower stage
- One (1) switch for elevating upper stage
- One (1) light to indicate when light bank is out of roof nest position
- One (1) light to indicate when light bank is rotated to proper nest position

Command Light controls shall be located per itemized compartment list.

The light tower shall have a full extension of 10' - 6" from mounted position and shall extend from nested position to full upright in 20 seconds.

The overall size of the nested light tower shall be approximately 48" wide x 73" long x 15.1/4" high, and weigh approximately 350 lbs.

A flashing warning light shall be provided in cab, indicating when a light tower is not in nested position as required by NFPA 1901. The operational envelope of the mast shall be automatically illuminated whenever the mast assembly is being raised, lowered, or rotated as required by NFPA 1901.

The Command Light shall be covered by a five (5) year limited warranty from defects in materials and workmanship. An operation, maintenance, and parts manual shall be provided with the delivered apparatus.

Kremmling Fire Protection District

Medium Rescue

Production Specification

RECESSED LIGHT TOWER

The specified light tower(s) shall be recessed into the roof of body to allow light tower(s) to be stowed below roof level. The floor and side walls of recessed area shall be fabricated as a separate module from 3/16" aluminum treadplate with an overlapping 3" flange around perimeter roof line. The recessed area shall be completely water tight. All electrical connections made to light tower shall be located on sidewalls for a water tight connection.

The recessed area shall have two (2) water drain holes (in opposite corners) with flexible 1" diameter hose routed to the area below the body.

EQUIPMENT PAYLOAD WEIGHT ALLOWANCE

In compliance with NFPA 1901 standards, the special service vehicle shall be designed for an equipment loading allowance of 4,000 lbs. of Kremmling Fire Protection District provided loose equipment based on a 30,001 - 40,000 pound gross vehicle weight rating.

EQUIPMENT

The following equipment shall be furnished with the completed special service vehicle;

- One (1) container of assorted stainless steel nuts, bolts, screws and washers used in the construction of the apparatus shall be provided with the completed apparatus.
- There shall be two (2) NFPA approved folding aluminum wheel chocks provided for 44" diameter tires that together will hold the vehicle when loaded to its GVWR or GCWR, on a hard surface with a 20 % grade, with the transmission in neutral, and the parking brake released.
 - The wheel chock(s) shall be mounted behind rear wheels, below body on streetside.
- Two (2) Streamlight Fire Vulcan Vehicle Mounting Systems shall be provided. Each flashlight shall be orange in color. Each flashlight shall have a 12 volt DC charger and vehicle mount kit. Each flashlight shall have a 20 watt spotlight style bulb and reflector. The flashlights shall be wired to battery direct unless otherwise specified by the customer.
 - The flashlight(s) shall be mounted on the completed unit in the lower area of compartment S1.
- One (1) Amkus ARRS1 Rope Rescue System (part number 941201000002) shall be provided with completed unit. The system shall have a 1,000 lbs. working capacity with a 10:1 safety factor when utilizing ½" rope. The system shall include one (1) 120 VAC rope rescue device (winch), one (1) foot switch, one (1) hitch extension, complete in carrying case (24" L x 19.5" W x 14" H, 66 lbs).

REMAINING NFPA MINOR EQUIPMENT BY PURCHASER


All other minor equipment not specified above, but required by NFPA 1901 before the unit is placed in service shall be supplied and mounted by Kremmling Fire Protection District.


PRELIMINARY DRAWING - FOR LAYOUT PURPOSES ONLY

REVISIONS			
REV	DESCRIPTION	DATE	BY

NOTE 1: Do not scale drawing. This drawing is for general truck configuration only. All items and dimensions shown are approximate and may vary with final production. The drawing may not provide illustration for all items in the specification. In all situations where the drawing may contradict the specifications, the specifications shall prevail. This drawing and all data herein are provided as confidential materials and shall not be reproduced without written consent of the manufacturer.

NOTE 2: Chassis frame height will change due to axle characteristics, loading and tire dimensions which will affect the overall height dimension shown. Any overall height restrictions should take this into consideration and allow approximately 2-3 inches of tolerance.

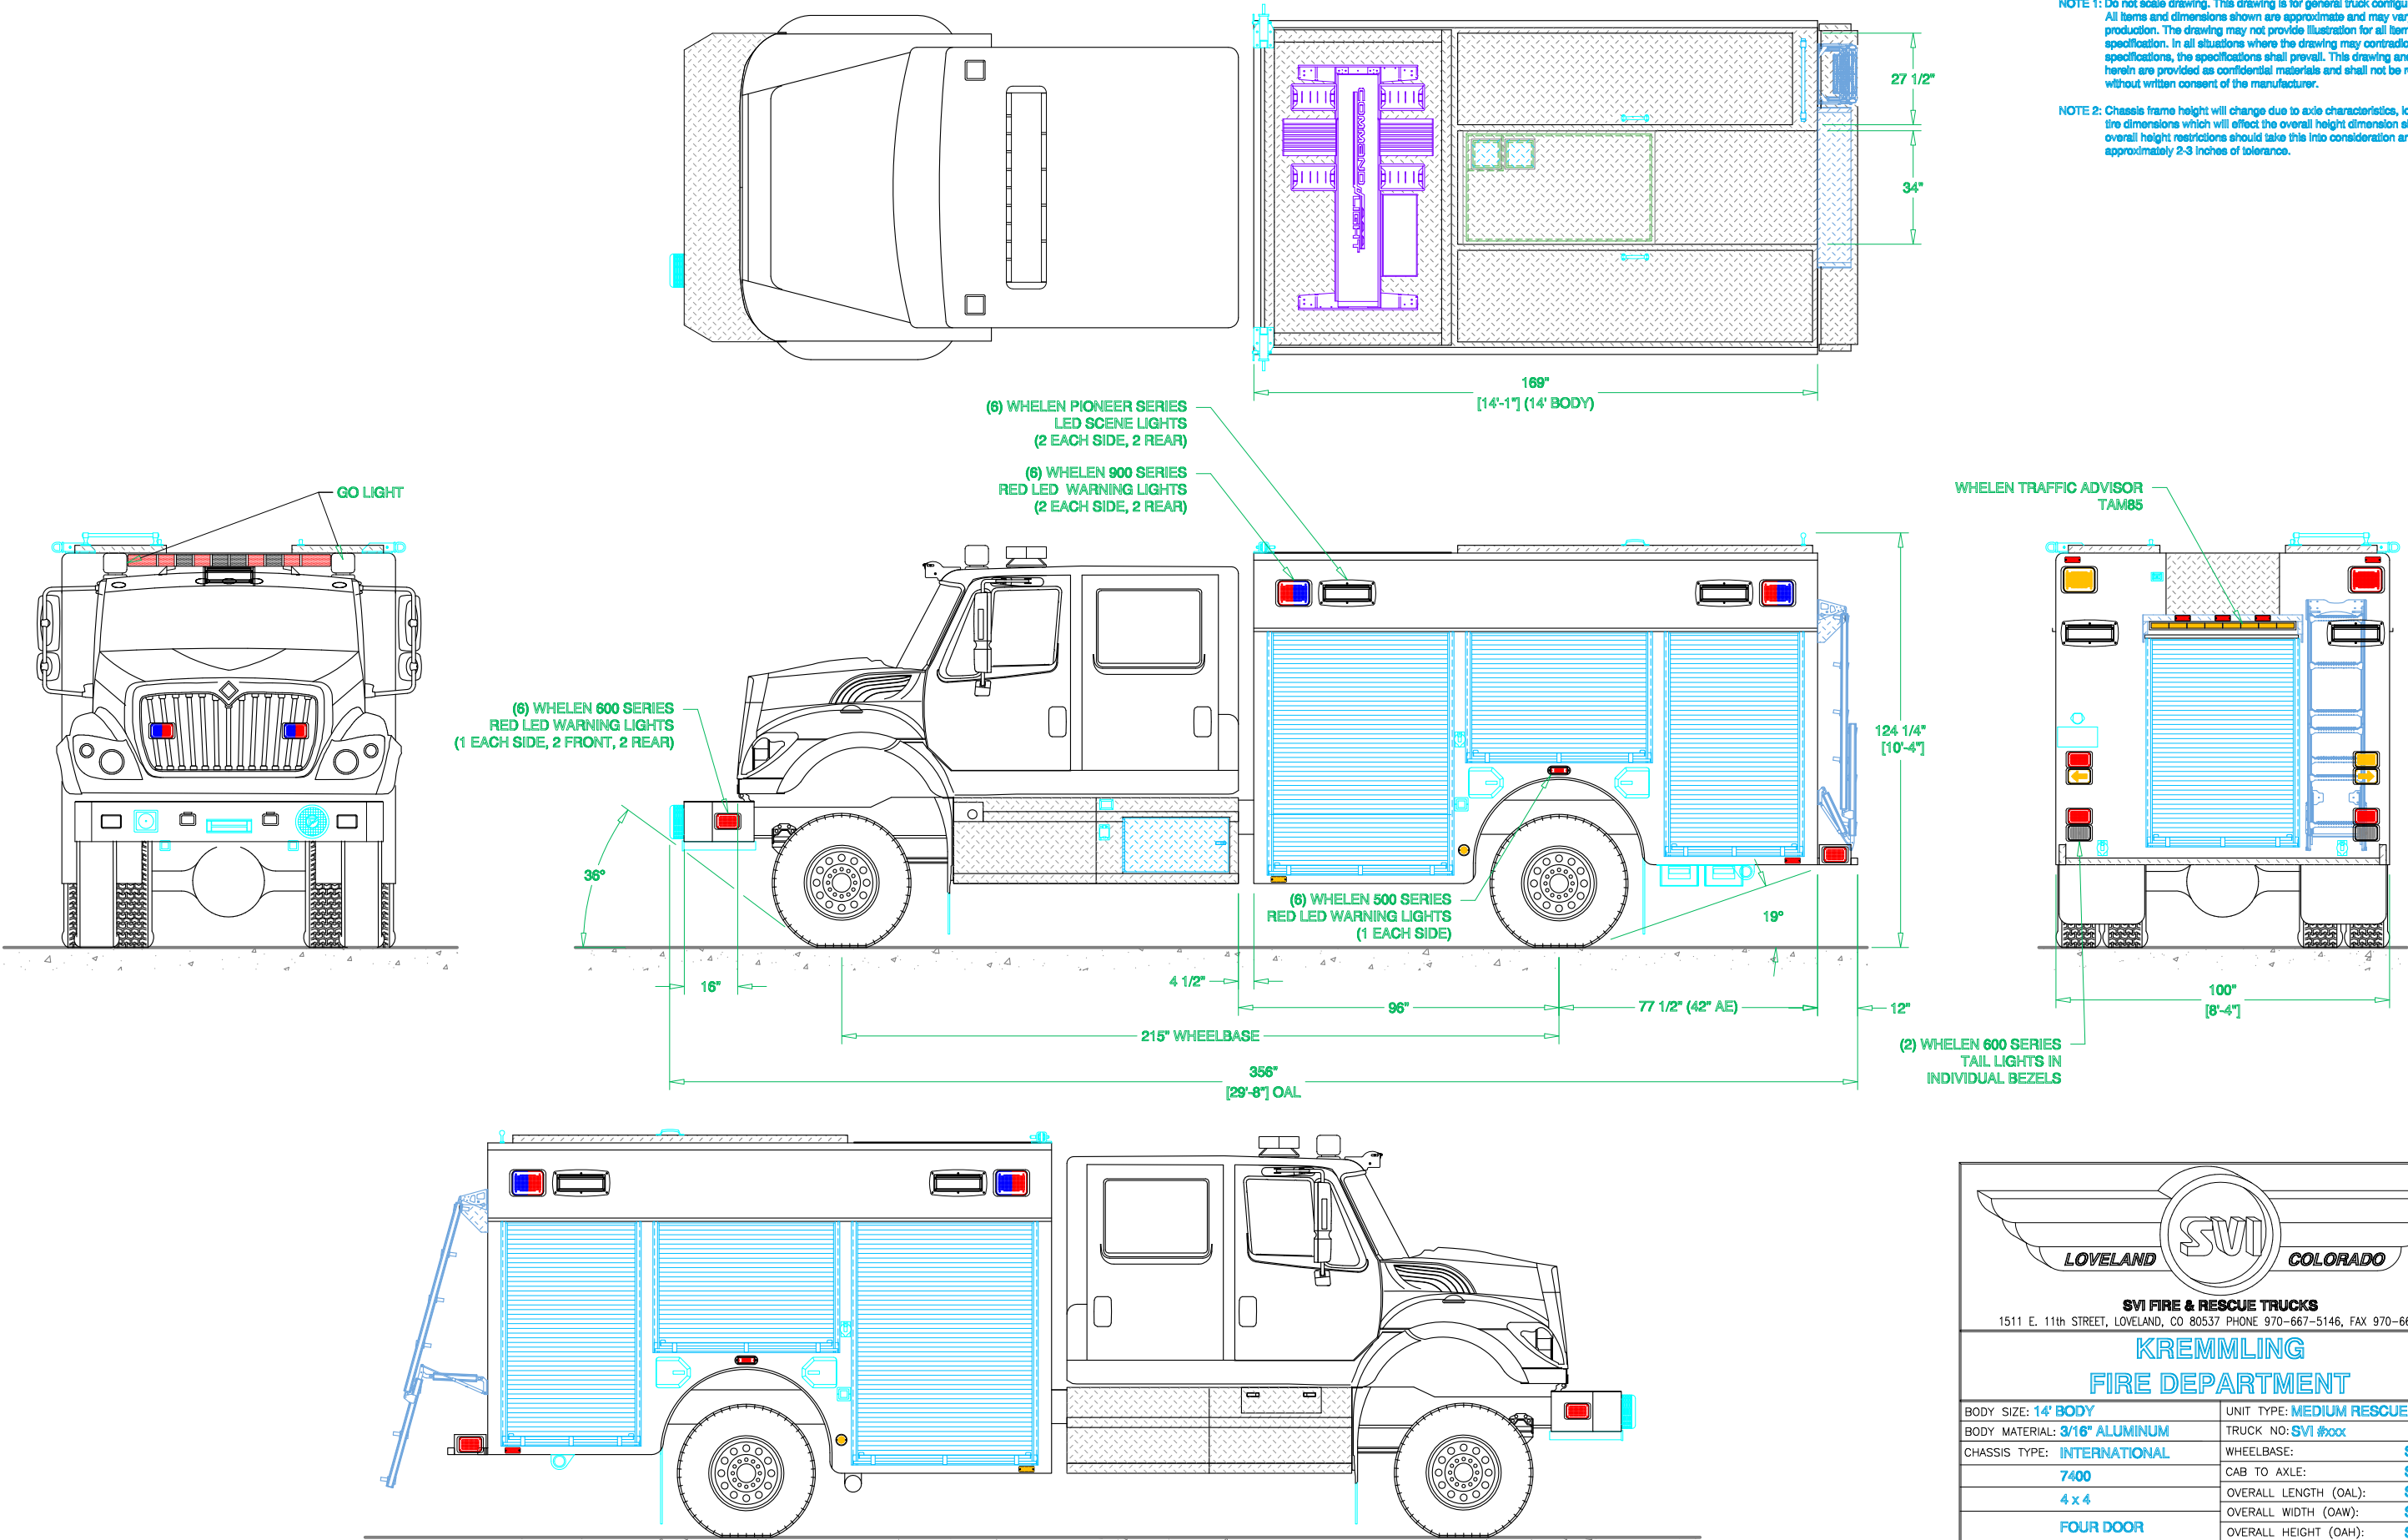



LOVELAND SVI COLORADO

SVI FIRE & RESCUE TRUCKS

1511 E. 11th STREET, LOVELAND, CO 80537 PHONE 970-667-5146, FAX 970-667-3343

KREMMLING

FIRE DEPARTMENT


BODY SIZE: 14' BODY	UNIT TYPE: MEDIUM RESCUE
BODY MATERIAL: 3/16" ALUMINUM	TRUCK NO: SVI #000
CHASSIS TYPE: INTERNATIONAL	WHEELBASE: SEE DWG
7400	CAB TO AXLE: SEE DWG
4 x 4	OVERALL LENGTH (OAL): SEE DWG
FOUR DOOR	OVERALL WIDTH (OAW): SEE DWG
	OVERALL HEIGHT (OAH): SEE DWG


DRAWN BY: JWG	DATE: JANUARY 25, 2011	SCALE: 1/4" = 1'-0"
DRAWING NO: Kremmling_CO_mr_PCM1		SHEET 1 OF 2

PRELIMINARY DRAWING - FOR LAYOUT PURPOSES ONLY

REVISIONS			
REV	DESCRIPTION	DATE	BY

NOTE 1: Do not scale drawing. This drawing is for general truck configuration only. All items and dimensions shown are approximate and may vary with final production. The drawing may not provide illustration for all items in the specification. In all situations where the drawing may contradict the specifications, the specifications shall prevail. This drawing and all data herein are provided as confidential materials and shall not be reproduced without written consent of the manufacturer.

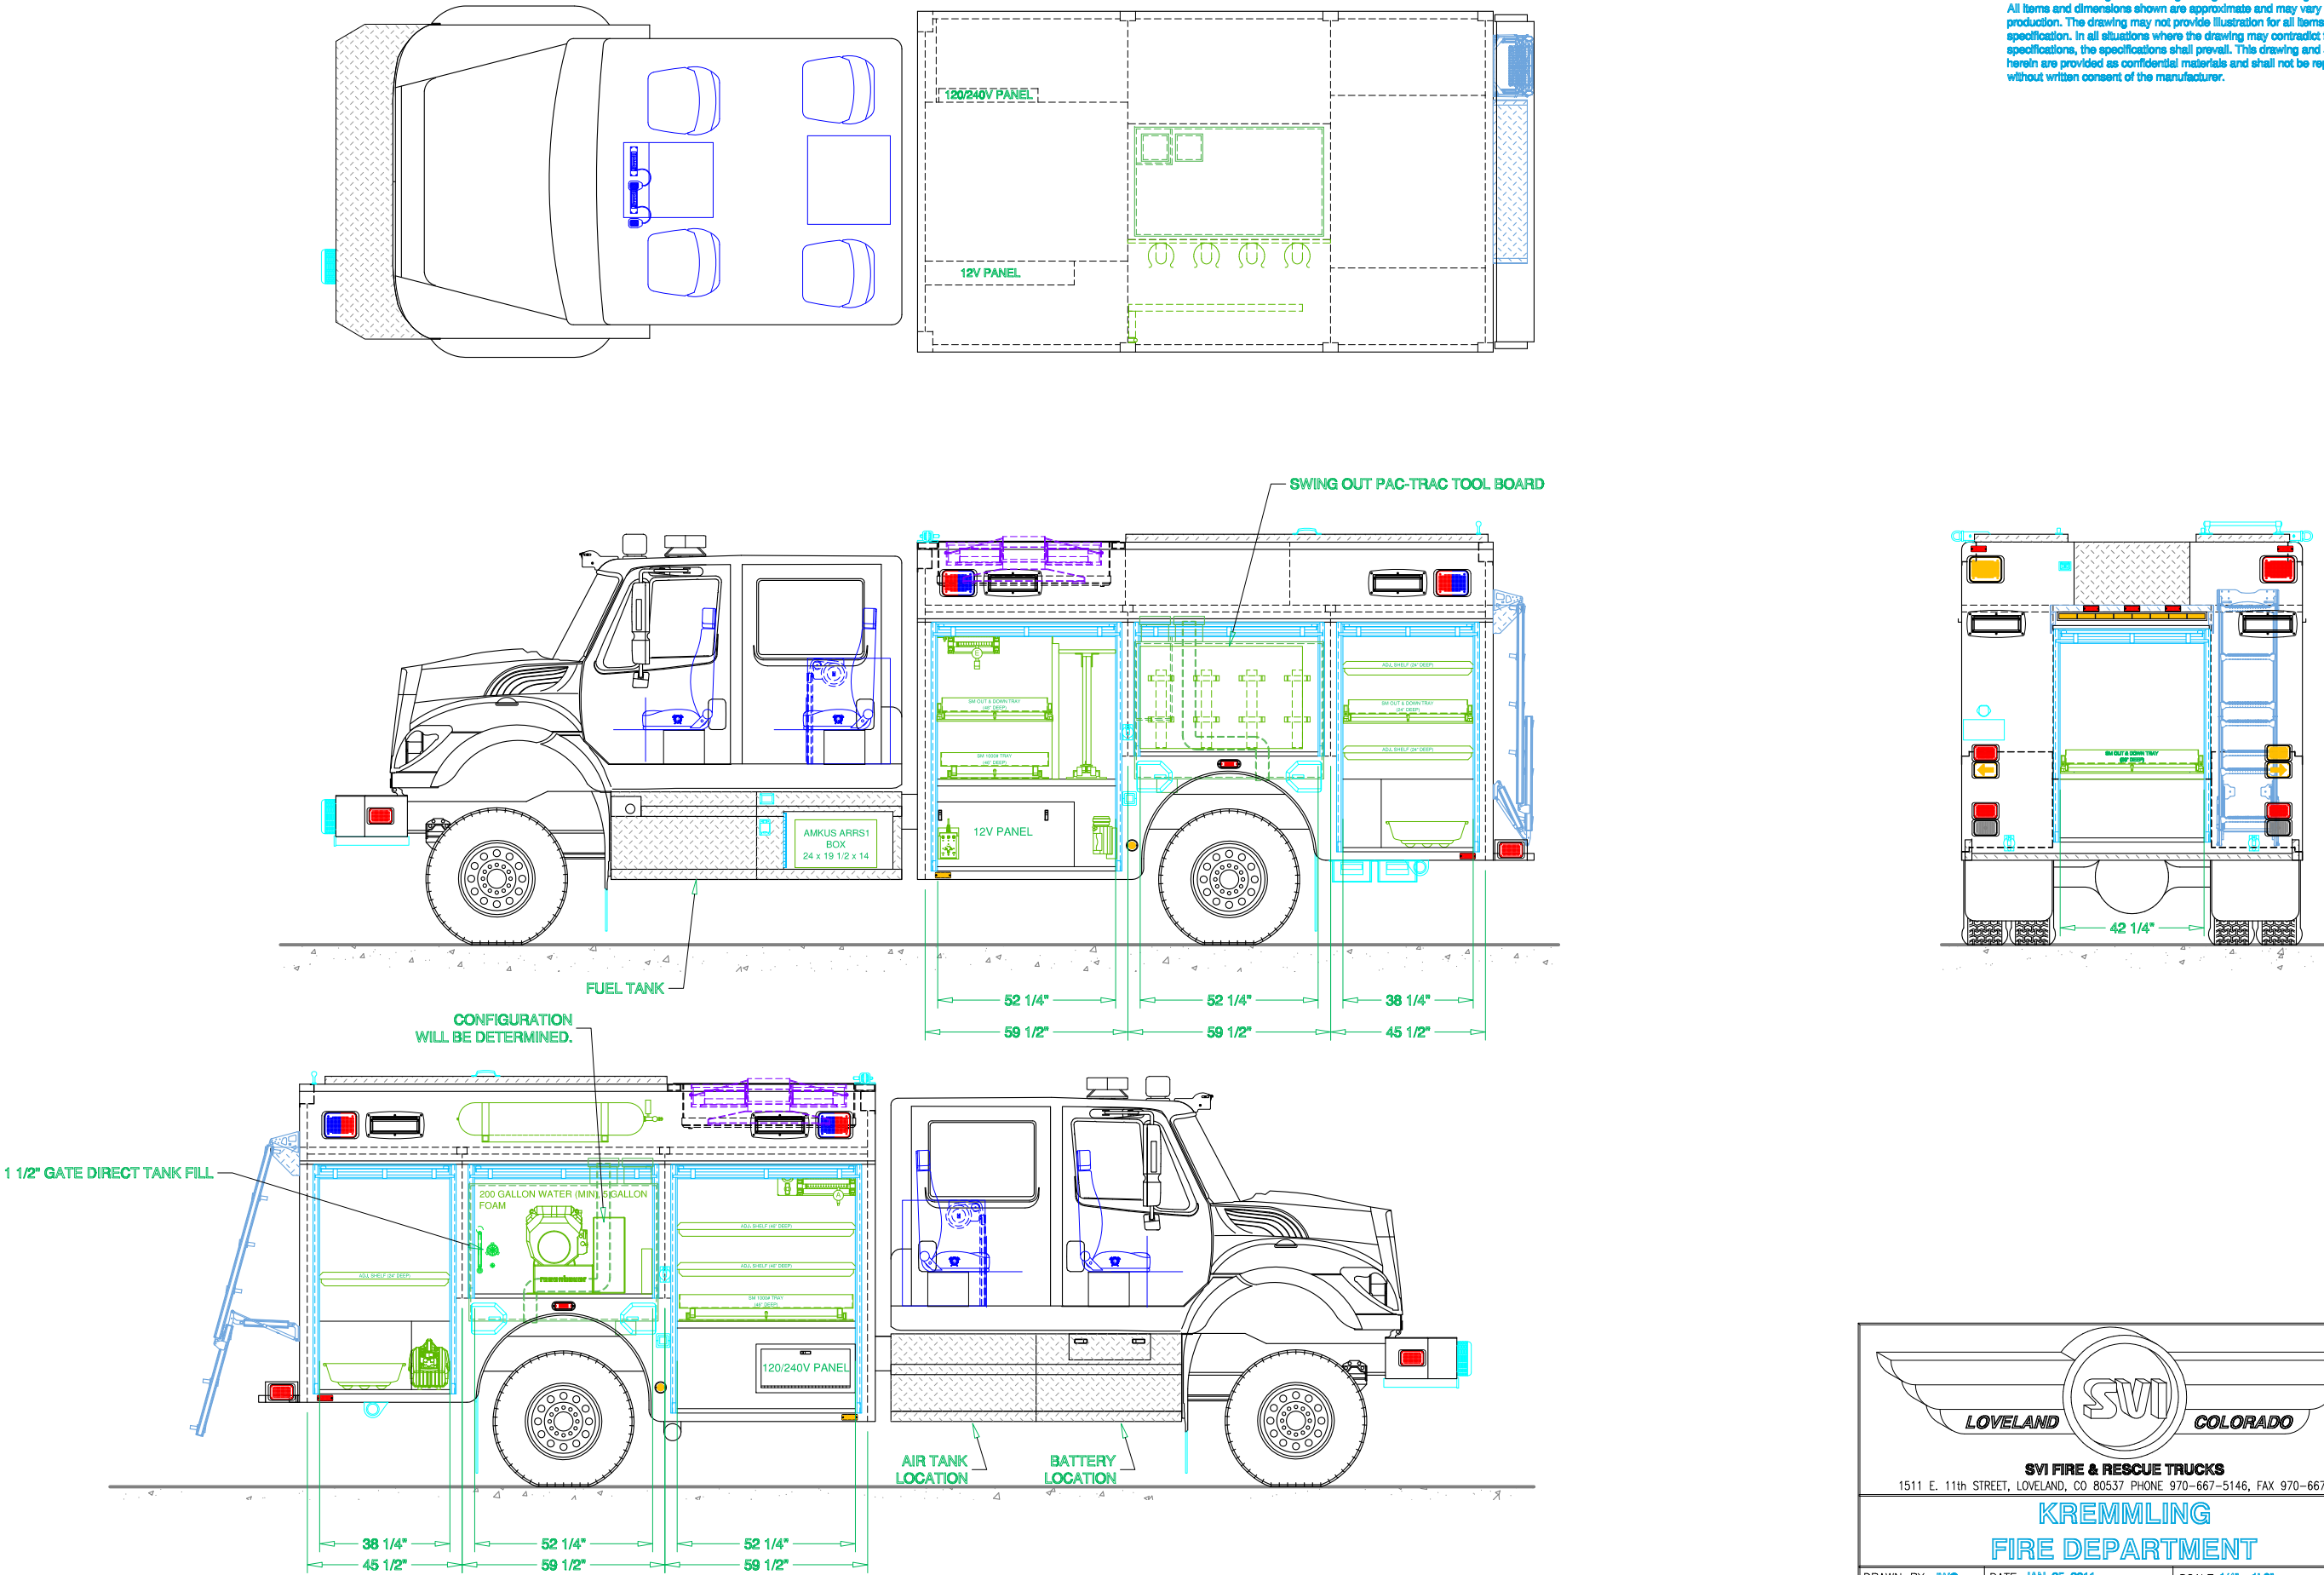



LOVELAND SVI COLORADO

SVI FIRE & RESCUE TRUCKS
1511 E. 11th STREET, LOVELAND, CO 80537 PHONE 970-667-5146, FAX 970-667-3343

KREMMLING
FIRE DEPARTMENT

DRAWN BY: **JWG**

DRAWING NO: **Kremmling_CO_mr_PCM1**

DATE: **JAN. 25, 2011**

SCALE: **1/4" = 1'-0"**

SHEET **2** OF **2**