

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### **INTERNET IN-PROCESS SITE**

The manufacturer shall post and maintain a website where the North Central Region will be able to view digital images of their apparatus as its being built. The digital images shall be posted once a week starting when the body begins production or when the cab/chassis arrives and shall continue until the final completion of unit.

### **RESPONSIBILITY OF PURCHASER**

It shall be the responsibility of the purchaser to specify the details of the apparatus in addition to the requirements in NFPA 1901 needed by the manufacturer to build the apparatus, including:

- 1) Requirements not uniquely specified in NFPA 1901, such as the type of apparatus desired.
- 2) Any features of the apparatus desired in addition to, or in excess of, the requirements in NFPA 1901.

After acceptance of the fire apparatus, the purchaser shall be responsible for ongoing training of personnel to develop and maintain proficiency regarding the proper and safe use of the apparatus and the associated equipment.

### **RESPONSIBILITY OF CONTRACTOR**

The Contractor shall provide a detailed description of the apparatus, a list of equipment to be furnished, and other construction and performance details to which the apparatus shall conform. The detailed description of the apparatus shall include, but shall not be limited to,

1. Estimated In-Service Weight,
2. Wheelbase, Turning Clearance Radius,
3. Principal dimensions, Angle of Approach, Angle of Departure,
4. Transmission, Axle Ratios.

The Contractor's detailed description shall include a statement specifically describing each aspect of the delivered apparatus that will not be fully compliant with the requirements of this standard.

The purpose of these Contractor specifications shall be to define what the contractor intends to furnish and deliver to the purchaser.

Responsibility for the apparatus and equipment shall remain with the contractor until they are accepted by the purchaser.

### **VEHICLE STABILITY SUPPLIED WITH CAB/CHASSIS**

The cab/chassis shall be equipped with a stability control system. The system shall have, at a minimum, a steering wheel position sensor, a vehicle yaw sensor, a lateral accelerometer and individual wheel brake controls.

### **FIRE APPARATUS PERFORMANCE**

The fire apparatus shall meet the requirements of this standard at elevations of 2000 ft (600 m) above sea level.

The fire apparatus shall meet all the requirements of this standard while stationary on a grade of 6 percent in any direction.

The fire apparatus shall meet the requirements of this standard in ambient temperature conditions between 32°F (0°C) and 110°F (43°C).

### **HIGHWAY PERFORMANCE**

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

The apparatus, when loaded to its estimated in-service weight, shall be capable of the following performance while on dry, paved roads that are in good condition:

- 1) Accelerating from 0 to 35 mph (55 km/hr) within 25 seconds on a 0 percent grade
- 2) Attaining a speed of 50 mph (80 km/hr) on a 0 percent grade
- 3) Maintaining a speed of at least 20 mph (32 km/hr) on any grade up to and including 6 percent

The maximum top speed of fire apparatus with a GVWR over 26,000 lb (11,800 kg) shall not exceed either 68 mph (109 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

If the combined water tank and foam agent tank capacities on the fire apparatus exceed 1250 gal (4732 L), or the GVWR of the vehicle is over 50,000 lb (22,680 kg), the maximum top speed of the apparatus shall not exceed either 60 mph (95 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

### **SERVICEABILITY**

The fire apparatus shall be designed to allow the manufacturer's recommended routine maintenance checks of lubricant and fluid levels to be performed by the operator without lifting the cab of a tilt-cab apparatus or without the need for hand tools.

Where special tools are required for routine service on any component of the apparatus, such tools shall be provided with the apparatus.

Apparatus components that interfere with repair or removal of other major components shall be attached with fasteners, such as cap screws and nuts, so that the components can be removed and installed with ordinary hand tools. These components shall not be welded or otherwise permanently secured into place.

### **FIRE APPARATUS DOCUMENTATION**

The contractor shall supply, at the time of delivery, at least one (1) copy of the following documents:

- 1) The manufacturer's record of apparatus construction details, including the following documents:
  - a) Owner's name and address
  - b) Apparatus manufacturer, model, and serial number
  - c) Chassis make, model, and serial number
  - d) GAWR of front and rear axles and GVWR
  - e) Front tire size and total rated capacity in pounds (kilograms)
  - f) Rear tire size and total rated capacity in pounds (kilograms)
  - g) Chassis weight distribution in pounds (kilograms) with water and manufacturer-mounted equipment (front and rear)
  - h) Engine make, model, serial number, rated horsepower and related speed, and governed speed; and if so equipped, engine transmission PTO(s) make, model, and gear ratio
  - i) Type of fuel and fuel tank capacity
  - j) Electrical system voltage and alternator output in amps
  - k) Battery make, model, and capacity in cold cranking amps (CCA)
  - l) Chassis transmission make, model, and serial number; and if so equipped, chassis transmission PTO(s) make, model, and gear ratio
  - m) Ratios of all driving axles
  - n) Maximum governed road speed
  - o) Pump make, model, rated capacity in gallons per minute (liters per minute where applicable), maximum discharge pressure capability rating, and serial number
  - p) Pump transmission make, model, serial number, and gear ratio

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

- q) Auxiliary pump make, model, rated capacity in gallons per minute (liters per minute where applicable), and serial number
  - r) Water tank certified capacity in gallons or liters
  - s) Foam tank (if provided) certified capacity in gallons (liters)
  - t) Aerial device type, rated vertical height in feet (meters), rated horizontal reach in feet (meters), and rated capacity in pounds (kilograms)
  - u) Paint manufacturer and paint number(s)
  - v) Company name and signature of responsible company representative
  - w) Weight documents from a certified scale showing actual loading on the front axle, rear axle(s), and overall fire apparatus (with the water tank full but without personnel, equipment, and hose)
- 
- 2) Certification of compliance of the optical warning system (see 13.8.16)
  - 3) Siren manufacturer's certification of the siren (see 13.9.1.1)
  - 4) Written load analysis and results of the electrical system performance tests (see 13.14.1 and Section 13.15)
  - 5) Certification of slip resistance of all stepping, standing, and walking surfaces (see 15.7.4.5)
  - 6) If the apparatus has a fire pump, the pump manufacturer's certification of suction capability (see 16.2.4.1)
  - 7) If the apparatus is equipped with a fire pump and special conditions are specified by the purchaser, the pump manufacturer's certification of suction capacity under the special conditions (see 16.2.4.2)
  - 8) If the apparatus has a fire pump, a copy of the apparatus manufacturer's approval for stationary pumping applications (see 16.3.1)
  - 9) If the apparatus has a fire pump, the engine manufacturer's certified brake horsepower curve for the engine furnished, showing the maximum governed speed (see 16.3.2.2)
  - 10) If the apparatus has a fire pump, the pump manufacturer's certification of the hydrostatic test (see 16.5.2.2)
  - 11) If the apparatus has a fire pump with a maximum discharge pressure capability rating that exceeds the hydrostatic test pressure of 16.5.2.1, the pump manufacturer's certification of the hydrodynamic test
  - 12) If the apparatus has a fire pump, the certification of inspection and test for the fire pump (see 16.13.1.1.5 or 16.13.1.2.4 as applicable)
  - 13) If the apparatus is equipped with an auxiliary pump, the apparatus manufacturer's certification of the hydrostatic test (see Section 17.13)
  - 14) When the apparatus is equipped with a water tank, the certification of water tank capacity (see Section 18.6)
  - 15) If the apparatus has an aerial device, the certification of inspection and test for the aerial device (see Section 19.24)
  - 16) If the apparatus has an aerial device, all the technical information required for inspections to comply with NFPA 1911
  - 17) If the apparatus has a foam proportioning system, the foam proportioning system manufacturer's certification of accuracy (see 20.10.4.2) and the final installer's certification the foam proportioning system meets this standard (see 20.11.2)
  - 18) If the system has a CAFS, the documentation of the manufacturer's pre delivery tests (see Section 21.9)
  - 19) If the apparatus has a line voltage power source, the certification of the test for the power source (see 22.15.7.2)
  - 20) If the apparatus is equipped with an air system, air tank certificates (see 24.5.1.2), the SCBA fill station certification (see 24.9.6), and the results of the testing of the air system installation (see 24.14.5 and 24.15.4)
  - 21) Any other required manufacturer test data or reports

### **OPERATIONS AND SERVICE DOCUMENTATION**

The contractor shall deliver with the fire apparatus complete operation and service documentation covering the completed apparatus as delivered and accepted.

The documentation shall address at least the inspection, service, and operations of the fire apparatus and all major components thereof.

The contractor shall also deliver with the fire apparatus the following documentation for the entire apparatus and each major operating system or major component of the apparatus:

- 1) Manufacturer's name and address

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

- 2) Country of manufacture
- 3) Source for service and technical information
- 4) Parts replacement information
- 5) Descriptions, specifications, and ratings of the chassis, pump (if applicable), and aerial device (if applicable)
- 6) Wiring diagrams for low voltage and line voltage systems to include the following information:
  - a) Pictorial representations of circuit logic for all electrical components and wiring
  - b) Circuit identification
  - c) Connector pin identification
  - d) Zone location of electrical components
  - e) Safety interlocks
  - f) Alternator–battery power distribution circuits
  - g) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems
- 7) Lubrication charts
- 8) Operating instructions for the chassis, any major components such as a pump or aerial device, and any auxiliary systems
- 9) Precautions related to multiple configurations of aerial devices, if applicable
- 10) Instructions regarding the frequency and procedure for recommended maintenance
- 11) Overall apparatus operating instructions
- 12) Safety considerations
- 13) Limitations of use
- 14) Inspection procedures
- 15) Recommended service procedures
- 16) Troubleshooting guide
- 17) Apparatus body, chassis and other component manufacturer's warranties
- 18) Special data required by this standard
- 19) A material safety data sheet (MSDS) for any fluid that is specified for use on the apparatus

The contractor shall deliver with the apparatus all manufacturer's operations and service documents supplied with components and equipment that are installed or supplied by the contractor.

### **NFPA REQUIRED DOCUMENTATION FORMAT - USB FLASH DRIVE**

The vehicle construction details and the operations and service documentation as required per NFPA 1901 latest edition shall be provided on a USB Flash Drive. These manuals shall be divided into sections for ease of reference. There shall be two (2) USB flash drives provided with the completed vehicle.

### **FIRE APPARATUS SAFETY GUIDE**

A Fire Apparatus Safety Guide published by Fire Apparatus manufacturer's Association shall be provided with delivered vehicle. This manual includes essential safety information for fire fighters, fire chiefs, apparatus mechanics, and fire department safety officers. The guide is applicable to municipal, wildland, and airport fire fighting apparatus manufactured on either custom or commercial chassis.

### **STATEMENT OF EXCEPTIONS**

The final-stage manufacturer shall deliver with the fire apparatus either a certification that the apparatus fully complies with all requirements of this standard or alternatively, a Statement of Exceptions specifically describing each aspect of the completed apparatus that is not fully compliant with the requirements of this standard at the time of delivery.

The Statement of Exceptions shall contain, for each noncompliant aspect of the apparatus or missing required item, the following information:

- 1) A separate specification of the section of the applicable standard for which compliance is lacking
- 2) A description of the particular aspect of the apparatus that is not in compliance therewith or required equipment that is missing

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

- 3) A description of the further changes or modifications to the delivered apparatus that must be completed to achieve full compliance
- 4) Identification of the entity that will be responsible for making the necessary post delivery changes or modifications or for supplying and installing any missing required equipment to the apparatus to achieve full compliance with this standard

Prior to or at the time of delivery of the apparatus, the Statement of Exceptions shall be signed by an authorized agent of the entity responsible for final assembly of the apparatus and by an authorized agent of the purchasing entity, indicating mutual understanding and agreement between the parties regarding the substance thereof.

### **CARRYING CAPACITY**

The GAWR and the GCWR or GVWR of the chassis shall be adequate to carry the weight of the completed vehicle when loaded to its estimated in-service weight. The manufacturer shall establish the estimated in service weight during the design of the vehicle.

The estimated in-service weight shall include the following:

1. The chassis, body and tank(s)
2. Full fuel, lubricant, and other chassis or component fluid tanks or reservoirs
3. Full water and other agent tanks
4. \*250 lb (114 kg) in each seating position
5. Fixed equipment such as pumps, aerial devices, generators, reels and air systems as installed
6. Ground ladders, suction hose, designed hose load in their hose beds and on their reels
7. An allowance for miscellaneous equipment that is the greatest of the following:
  - a) The values shown for items 1 - 7
  - b) A purchaser-provided list of equipment to be carried with weights
  - c) A purchaser-specified miscellaneous equipment allowance

The manufacturer shall engineer and design the fire apparatus such that the completed apparatus, when loaded to its estimated in-service weight, with all movable weights distributed as close as is practical to their intended in-service configuration, does not exceed the GVWR.

A final manufacturer's certification of the GVWR or GCWR, along with a certification of each GAWR, shall be supplied on a label affixed to the vehicle.

The fire apparatus manufacturer shall permanently affix a high-visibility label in a location visible to the driver while seated.

The label shall show the height of the completed unequipped fire apparatus in feet and inches (meters), the length of the completed fire apparatus in feet and inches (meters), and the GVWR in tons (metric tons).

Wording on the label shall indicate that the information shown was current when the apparatus was manufactured and that, if the overall height changes while the vehicle is in service, the fire department must revise that dimension on the plate.

Apparatus Type	Equip. Storage Area	Apparatus Size	Equipment Allowance	
			lb.	kg.
Special Service Fire Apparatus	Minimum of 120 cu ft (3.4 cu mt) of enclosed compartmentation.	10,000 lb to 15,000 lb (4,500 kg to 7,000 kg) GVWR	2,000	910
		15,001 lb to 20,000 lb (7,001 kg to 9,000 kg) GVWR	2,500	1,135
		20,001 lb to 30,000 lb	3,000	1,350

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

		(9,001 kg to 14,000 kg) GVWR		
		30,001 lb to 40,000 lb (14,001 kg to 18,000 kg) GVWR	4,000	1,800
		40,001 lb to 50,000 lb (18,001 kg to 23,000 kg) GVWR	6,000	2,700
		50,001 lb to 60,000 lb (23,001 kg to 27,000 kg) GVWR	8,000	3,600
		60,001 lb and up (27,001 kg) GVWR	10,000	4,500

### **TESTING**

#### **ROAD TEST**

Each apparatus shall be tested by the manufacturer before delivery to verify that it meets the following criteria;

Tests shall be conducted at a location and in a manner that does not violate local, state or provincial, or federal traffic laws. Tests shall be conducted on a dry, level, paved surface that is free of loose material, oil, or grease. Tests shall be conducted with the water and foam tanks full (water or product).

The apparatus shall accelerate from 0 to 35 mph (55 km/hr) within 25 seconds. The apparatus shall attain a speed of 50 mph (80 km/ hr).

The auxiliary braking system, if so equipped, shall function as intended by the auxiliary braking system manufacturer.

The air service brakes shall bring the apparatus to a complete stop from a speed of 20 mph (32.2 km/hr) in a distance not exceeding 35 ft (10.7 m).

The hydraulic service brakes shall bring the apparatus to a complete stop from a speed of 30 mph (48.2 km/hr) in a distance not exceeding 88 ft (26.8 m).

#### **LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST**

The vehicles low voltage electrical system shall be tested and certified by the manufacturer. The certified test results shall be delivered with the completed vehicle. Tests shall be performed when the air temperature is between 0°F and 110°F (-18°C and 43°C).

#### **TEST SEQUENCE**

The following three (3) tests shall be performed in the order in which they appear below. Before each test, the batteries shall be fully charged until the voltage stabilizes at the voltage regulator set point and the lowest charge current is maintained for ten (10) minutes. Failure of any of these tests shall require a repeat of the sequence.

##### **1. RESERVE CAPACITY TEST**

The engine shall be started and kept running until the engine and engine compartment temperatures are stabilized at normal operating temperatures and the battery system is fully charged. The engine shall be shut off and the minimum continuous electrical load shall be activated for ten (10) minutes.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

All electrical loads shall be turned off prior to attempting to restart the engine. The battery system shall then be capable of restarting the engine. Failure to restart the engine shall be considered a test failure of the battery system.

### **2. ALTERNATOR PERFORMANCE TEST**

#### **TEST AT IDLE**

The minimum continuous electrical load shall be activated with the engine running at idle speed. The engine temperature shall be stabilized at normal operating temperature. The battery system shall be tested to detect the presence of battery discharge current. The detection of battery discharge current shall be considered a test failure.

#### **TEST AT FULL LOAD**

The total continuous electrical load shall be activated with the engine running up to the engine manufacturer's governed speed. The test duration shall be a minimum of two (2) hours. Activation of the load management system shall be permitted during this test.

An alarm sounded by excessive battery discharge, as detected by the warning system required in 13.3.4, or a system voltage of less than 11.8 V dc for a 12 V nominal system, 23.6 V dc for a 24 V nominal system, or 35.4 V dc for a 42 V nominal system for more than 120 seconds shall be considered a test failure.

### **3. LOW VOLTAGE ALARM TEST**

The following test shall be started with the engine off and the battery voltage at or above 12 V for a 12 V nominal system, 24 V for a 24 V nominal system or 36 V for a 42 V nominal system.

With the engine shut off, the total continuous electrical load shall be activated and shall continue to be applied until the excessive battery discharge alarm activates. The battery voltage shall be measured at the battery terminals.

The test shall be considered a failure if the alarm does not sound in less than 140 seconds after the voltage drops to 11.70 V for a 12 V nominal system, 23.4 V dc for a 24 V nominal system, or 35.1 V for a 42 V nominal system.

The battery system shall then be able to restart the engine. Failure to restart the engine shall be considered a test failure.

### **LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST**

#### **DOCUMENTATION**

The manufacturer shall deliver the following with the fire apparatus:

- 1) Documentation of the electrical system performance tests
- 2) A written electrical load analysis, including the following:
  - a) The nameplate rating of the alternator
  - b) The alternator rating
  - c) Each of the component loads specified that make up the minimum continuous electrical load
  - d) Additional electrical loads that, when added to the minimum continuous electrical load, determine the total continuous electrical load
  - e) Each individual intermittent electrical load

#### **WARRANTY**

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

A full statement shall be provided of the warranties for the vehicle(s) being bid. Warranties should clearly describe the terms under which the vehicle manufacturer accepts responsibility for the cost to repair defects caused by faulty design, quality of work or material and for the applicable period of time after delivery.

Cost of repairs refers to all costs related thereto including, but not limited to, the cost of materials and the cost of labor.

The Body Manufacturer shall warrant all materials and accessories used on the vehicle(s), whether fabricated by manufacturer or purchased from an outside source and will deal directly with the North Central Region on all warranty work.

### **GENERAL LIMITED WARRANTY - TWO (2) YEARS**

The vehicle shall be free of defects in material and workmanship for a period of two (2) years or 36,000 miles (or 57,936 kilometers), whichever occurs first starting thirty (30) days after the original invoice date.

The Contractor must be the "single source" coordinator of all warranties on the vehicle.

### **LOW VOLTAGE ELECTRICAL WARRANTY - FIVE (5) YEARS**

The vehicle low voltage electrical system shall be free of defects in material and workmanship for a period of five (5) years or 60,000 miles (or 96,561 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

### **STRUCTURAL WARRANTY - TEN (10) YEARS**

The body shall be free of structural or design failure or workmanship for a period of ten (10) years, or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

### **UNDERCOAT WARRANTY**

The body undercoating shall have a warranty provided by the manufacturer for the lifetime of the vehicle or twenty (20) years, whichever occurs first. The warranty shall be transferable between vehicle owners. Should the undercoating material applied to the underside of the body and wheel wells of the vehicle ever flake off, peel, chip or crack due to drying out, the damaged area shall be re-sprayed without charge to the vehicle owner.

### **PAINT LIMITED WARRANTY - TEN (10) YEARS**

The body shall be free of bubbling or peeling as a result of a defect in the method of manufacture for a period of ten (10) years or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date. **Pro-rated warranties will not be acceptable.**

### **GRAPHICS LIMITED WARRANTY**

The 3M graphics installation shall be warranted for a period of two (2) years. The 3M materials installed on completed vehicle shall be warranted for seven (7) years. The 3M Diamond grade film (if specified) shall be warranted for ten (10) years.

### **CONSTRUCTION PERIOD**

The completed vehicle shall be delivered within three hundred (300) days after receipt of a purchase order or contract.



# North Central Region(Boulder PD)

## SVI #1130- Production Specification

Contractor shall not be held liable for delays of chassis delivery due to accidents, strikes, floods or other events not subject to their control. Contractor shall provide immediate written notice to North Central Region as to delays and to what extent these delays have in completing vehicle within the stated construction time period.

### **OVERALL HEIGHT REQUIREMENT**

There is no overall height (OAH) restriction for this vehicle.

### **OVERALL LENGTH REQUIREMENT**

There is no overall length (OAL) restriction for this vehicle.

### **OVERALL WIDTH**

The overall width (OAW) of the body at drip rails shall be 102" (8' - 6"), and body shall be 100" (8' - 4").

### **ANGLE OF APPROACH**

The angle of approach for this vehicle shall not be less than eight (8) degrees when it is loaded to the estimated in-service weight as specified by the current edition of NFPA 1901.

### **ANGLE OF DEPARTURE**

The angle of departure for this vehicle shall not be less than eight (8) degrees when it is loaded to the estimated in-service weight as specified by the current edition of NFPA 1901.

Inspection Trips, Delivery, Demonstration

### **PRE-CONSTRUCTION CONFERENCE**

A pre-construction conference shall be required at the Contractor's factory for two (2) personnel from the North Central Region to finalize all construction details prior to manufacturing.

The Contractor shall at his/her expense, provide transportation, lodging, rental car and meal expenses during the pre-construction conference. Any travel distance greater than 250 miles shall be by non-stop commercial air travel.

### **FINAL INSPECTION CONFERENCE**

A final inspection conference shall be required at the Contractor's factory for two (2) personnel from the North Central Region to inspect the vehicle and construction details prior to shipment of the completed vehicle. This inspection shall take place after any specified striping and lettering is installed.

The Contractor shall at his/her expense, provide transportation, lodging, rental car and meal expenses during the final inspection conference. Any travel distance greater than 250 miles shall be by non-stop commercial air travel.

### **DELIVERY AND DEMONSTRATION**

The Contractor shall be responsible for the delivery of the completed unit to the North Central Region's location. On initial delivery of the apparatus, the Contractor shall supply a qualified representative to demonstrate the apparatus and provide initial instruction to representatives of the North Central Region regarding the operation, care and maintenance of the apparatus and equipment supplied at North Central Region location.

The Delivery Engineer shall set delivery and instruction schedule with the person appointed by North Central Region.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

After delivery of the apparatus, the North Central Region shall be responsible for ongoing training of its personnel to proficiency regarding the proper and safe use of the apparatus and associated equipment.

### **CAB CHASSIS SPECIFICATIONS**

#### **Vehicle Configuration**

M2 106 CONVENTIONAL CHASSIS  
2020 MODEL YEAR SPECIFIED  
SET BACK AXLE - TRUCK **4 x 4**

#### **General Service**

RESCUE AND EMERGENCY SERVICE  
MEDIUM TRUCK WARRANTY  
EXPECTED FRONT AXLE LOAD: 14000 lbs  
EXPECTED REAR DRIVE AXLE LOAD: 24000 lbs  
EXPECTED GROSS VEHICLE CAPACITY: 38000 lbs

#### **Engine**

CUM L9 350EV HP @ 2000 RPM, 2200 GOV RPM , 1000 LB/FT @ 1400 RPM

#### **Engine Equipment**

2016-2019 ONBOARD DIAGNOSTICS/2010 EPA/CARB/GHG17  
SIDE OF HOOD AIR INTAKE WITH FIREWALL MOUNTED DONALDSON AIR CLEANER  
DR 12V 275 AMP 40-SI BRUSHLESS PAD ALTERNATOR WITH REMOTE BATTERY VOLTAGE SENSE  
(3) DTNA GENUINE, FLOODED STARTING, MIN 2250CCA, 510RC, THREADED STUD BATTERIES WITH POSITIVE JUMP START POST  
BATTERY BOX FRAME MOUNTED  
WIRE GROUND RETURN FOR BATTERY CABLES WITH ADDITIONAL FRAME GROUND RETURN  
POSITIVE LOAD DISCONNECT WITH CAB MOUNTED CONTROL SWITCH MOUNTED OUTBOARD DRIVER SEAT  
CUMMINS TURBOCHARGED 18.7 CFM AIR COMPRESSOR WITH INTERNAL SAFETY VALVE  
CUMMINS EXHAUST BRAKE INTEGRAL WITH VARIABLE GEOMETRY TURBO WITH ON/OFF DASH SWITCH  
RH MTD HORIZONTAL AFTERTREATMENT SYSTEM ASSEMBLY WITH RH HORIZONTAL TAILPIPE  
HORTON DRIVEMASTER ADVANTAGE ON/OFF FAN DRIVE  
AUTOMATIC FAN CONTROL NON ENGINE MOUNTED  
CUMMINS SPIN ON FUEL FILTER  
COMBINATION FULL FLOW/BYPASS OIL FILTER  
1100 SQUARE INCH ALUMINUM RADIATOR  
ANTIFREEZE TO -34F, OAT (NITRITE AND SILICATE FREE) EXTENDED LIFE COOLANT  
GATES BLUE STRIPE COOLANT HOSES OR EQUIVALENT  
CONSTANT TENSION HOSE CLAMPS FOR COOLANT HOSES  
ELECTRIC GRID AIR INTAKE WARMER  
DELCO 12V 38MT HD STARTER WITH INTEGRATED MAGNETIC SWITCH

#### **Transmission**

ALLISON 3000 EVS 6 SPD AUTOMATIC TRANSMISSION

#### **Transmission Equipment**

MAGNETIC PLUGS, ENGINE DRAIN, TRANSMISSION DRAIN, AXLE(S) FILL AND DRAIN  
PUSH BUTTON ELECTRONIC SHIFT CONTROL, DASH MOUNTED

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

TRANSMISSION PROGNOSTICS - ENABLED 2013  
WATER TO OIL TRANSMISSION COOLER, IN RADIATOR END TANK  
MERITOR MTC-4210 TRANSFER CASE & OIL COOLER  
TRANSMISSION OIL CHECK AND FILL WITH ELECTRONIC OIL LEVEL CHECK  
TRANSFER CASE SHIFT CONTROLS WITH TRANSFER CASE PTO ON/OFF SWITCH WHEN APPLICABLE  
SYNTHETIC TRANSMISSION FLUID (TES-295 COMPLIANT)

### Front Axle and Equipment

MX-14-120-EVO 14,000# 1790MM KPI SINGLE FRONT DRIVE AXLE  
MERITOR 16.5X5 Q+ MX DRIVE AXLE CAST SPIDER HEAVY DUTY CAM FRONT BRAKES  
FIRE AND EMERGENCY SEVERE SERVICE, NON-ASBESTOS FRONT LINING  
FRONT BRAKE DUST SHIELDS  
FRONT OIL SEALS  
MERITOR AUTOMATIC FRONT SLACK ADJUSTERS  
TRW TAS-85 POWER STEERING  
SYNTHETIC 75W-90 FRONT AXLE LUBE

### Front Suspension

14,600# TAPERLEAF FRONT SUSPENSION  
MAINTENANCE FREE RUBBER BUSHINGS  
FRONT SHOCK ABSORBERS

### Rear Axle and Equipment

24,000 LB FIRE/EMERGENCY SERVICE SINGLE REAR AXLE  
IRON REAR AXLE CARRIER WITH STANDARD AXLE HOUSING  
MXL 17T MERITOR EXTENDED LUBE MAIN DRIVELINE WITH HALF ROUND YOKES  
DRIVER CONTROLLED TRACTION DIFFERENTIAL  
MERITOR 16.5X7 Q+ CAST SPIDER CAM REAR BRAKES, DOUBLE ANCHOR HEAVY DUTY BRAKE AND SHOES  
FIRE AND EMERGENCY SEVERE SERVICE NON-ASBESTOS REAR BRAKE LINING  
REAR BRAKE DUST SHIELDS  
REAR OIL SEALS  
MERITOR AUTOMATIC REAR SLACK ADJUSTERS  
SYNTHETIC 75W-90 REAR AXLE LUBE

### Rear Suspension

24,000# FLAT LEAF SPRING REAR SUSPENSION WITH HELPER, WITH RADIUS ROD, FOR FIRE/EMERGENCY  
FORE/AFT CONTROL RODS

### Brake System

AIR BRAKE PACKAGE  
WABCO 4S/4M ABS WITH TRACTION CONTROL & ESC  
STANDARD AIR SYSTEM PRESSURE PROTECTION SYSTEM  
BW AD-9 BRAKE LINE AIR DRYER WITH HEATER  
CUSTOM STEEL AIR BRAKE RESERVOIRS  
BW DV-2 AUTO DRAIN VALVE WITH HEATER - WET TANK

### Electrical Connections

UPGRADED CHASSIS MULTIPLEXING UNIT  
UPGRADED BULKHEAD MULTIPLEXING UNIT

### Wheelbase & Frame

(232 INCH) WHEELBASE / (119.5 INCH) CA

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

11/32X3-1/2X10-15/16 INCH STEEL FRAME 120KSI  
(79 INCH) REAR FRAME OVERHANG

### Chassis Equipment

THREE-PIECE 14 INCH STEEL BUMPER WITH COLLAPSIBLE ENDS PAINTED JOB COLOR  
FRONT TOW HOOKS - FRAME MOUNTED  
FENDER & FRONT OF HOOD MOUNTED FRONT MUDFLAPS  
GRADE 8 THREADED HEX HEADED FRAME FASTENERS

### Fuel Tanks

50 GALLON RECTANGULAR ALUMINUM FUEL TANK - LH  
6 GALLON DIESEL EXHAUST FLUID TANK  
FUEL/WATER SEPARATOR WITH WATER IN FUEL SENSOR AND 12 VOLT PREHEATER

### Tires

MICHELIN X WORKS Z 12R22.5 16 PLY RADIAL FRONT TIRES  
MICHELIN X WORKS Z 12R22.5 16 PLY RADIAL REAR TIRES

### Hubs

MERITOR IRON FRONT HUBS  
CONMET PRESET PLUS PREMIUM IRON REAR HUBS

### Wheels

22.5X8.25 10-HUB PILOT 2-HAND STEEL DISC FRONT WHEELS PAINTED JOB COLOR  
22.5X8.25 10-HUB PILOT 2-HAND STEEL DISC REAR WHEELS PAINTED JOB COLOR

### Cab Exterior

154 INCH BBC HIGH-ROOF ALUMINUM CONVENTIONAL AIR RIDE CREW CAB  
LH/RH EXTERIOR GRAB HANDLES W/ SINGLE RUBBER INSERT  
MOLD-IN BLACK COLOR HOOD GRILLES  
FIBERGLASS HOOD WITH FIREWALL INSULATION  
DUAL ELECTRIC HORNS  
INTEGRAL HEADLIGHT/MARKER ASSEMBLY  
LED AERODYNAMIC MARKER LIGHTS  
DUAL 102" WEST COAST BRIGHT FINISH HEATED MIRRORS WITH LH AND RH REMOTE  
LH AND RH 8 INCH BRIGHT FINISH CONVEX MIRRORS MOUNTED UNDER PRIMARY MIRRORS  
REAR WINDOW DELETE  
TINTED DOOR GLASS LH AND RH WITH TINTED NON-OPERATING WING WINDOWS  
MANUAL DOOR WINDOW REGULATORS & DOOR LOCKS  
TINTED WINDSHIELD  
2 GALLON WINDSHIELD WASHER RESERVOIR WITHOUT FLUID LEVEL INDICATOR, FRAME MOUNTED

### Cab Interior

OPAL GRAY VINYL INTERIOR  
MOLDED PLASTIC DOOR PANELS WITH ALUMINUM KICKPLATES LOWER DOORS  
BLACK MATS WITH PREMIUM INSULATION  
WOODGRAIN INSTRUMENT PANELS  
FORWARD ROOF MOUNTED CONSOLE WITH UPPER STORAGE COMPARTMENTS WITHOUT NETTING  
IN DASH STORAGE BIN  
AM/FM/WB DASH MTD RADIO WITH AUXILIARY INPUT, J1939  
USB CHARGERS (2) IN DASH  
(2) CUP HOLDERS LH AND RH DASH

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

HEATER, DEFROSTER AND AIR CONDITIONER  
MAIN HVAC CONTROLS WITH RECIRCULATION SWITCH  
SOLID-STATE CIRCUIT PROTECTION AND FUSES  
12V NEGATIVE GROUND ELECTRICAL SYSTEM  
OVERHEAD INSTRUMENT PANEL  
DOOR ACTIVATED DOME/RED MAP LIGHTS, FORWARD LH AND RH AND REAR LH, RH AND CENTER  
(1) 12V POWER SUPPLY  
HIGH BACK AIR SUSPENSION DRIVER SEAT WITH MECHANICAL LUMBAR AND INTEGRATED CUSHION EXTENSION  
HIGH BACK AIR SUSPENSION PASSENGER SEAT WITH MECHANICAL LUMBAR AND INTEGRATED CUSHION EXTENSION  
FULL WIDTH REAR BENCH SEAT  
BLACK CORDURA PLUS CLOTH SEAT COVERS  
BLACK SEAT BELTS WITH DRIVER INDICATOR LIGHT AND AUDIBLE ALARM  
ADJUSTABLE TILT AND TELESCOPING STEERING COLUMN  
4-SPOKE 18 INCH STEERING WHEEL  
DRIVER AND PASSENGER INTERIOR SUN VISORS

### Instruments & Controls

BLACK GAUGE BEZELS  
LOW AIR PRESSURE INDICATOR LIGHT AND AUDIBLE ALARM  
2 IN PRIMARY AND SECONDARY AIR PRESSURE GAUGES  
2 INCH ELECTRIC FUEL GAUGE  
2 INCH TRANSMISSION OIL TEMPERATURE GAUGE  
ENGINE COMPARTMENT MOUNTED AIR RESTRICTION INDICATOR WITH GRADUATIONS  
CUSTOM BACKUP ALARM  
ELECTRONIC CRUISE CONTROL WITH SWITCHES IN LH SWITCH PANEL  
ICU3S, 132X48 DISPLAY WITH DIAGNOSTICS, 28 LED WARNING LAMPS AND DATA LINKED  
FIRE AND EMERGENCY SERVICE VEHICLES ENGINE WARNING  
ELECTRICAL ENGINE COOLANT TEMPERATURE GAUGE  
ENGINE AND TRIP HOUR METERS INTEGRAL WITHIN DRIVER DISPLAY  
ELECTRIC ENGINE OIL PRESSURE GAUGE  
ELECTRONIC MPH SPEEDOMETER WITH SECONDARY KPH SCALE  
ELECTRONIC 3000 RPM TACHOMETER  
IGNITION SWITCH CONTROLLED ENGINE STOP  
DIGITAL VOLTAGE DISPLAY INTEGRAL WITH DRIVER DISPLAY  
SINGLE ELECTRIC WINDSHIELD WIPER MOTOR WITH DELAY  
MARKER LIGHT SWITCH INTEGRAL WITH HEADLIGHT SWITCH  
ONE VALVE PARKING BRAKE SYSTEM WITH DASH VALVE CONTROL  
SELF CANCELING TURN SIGNAL SWITCH WITH DIMMER, WASHER/WIPER AND HAZARD IN HANDLE  
INTEGRAL ELECTRONIC TURN SIGNAL FLASHER WITH HAZARD LAMPS OVERRIDING STOP LAMPS

### Paint Design

ONE SOLID CUSTOM BASE/CLEAR COAT BLACK COLOR  
BLACK, HIGH SOLIDS POLYURETHANE CHASSIS PAINT

### Weight Summary

Weight Front	Weight Rear	Total Weight
-----------------	----------------	-----------------

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

Factory Weight<sup>+</sup>

9297 lbs

4930 lbs

14227 lbs

(+) Weights shown are estimates only.

### **CAB TO AXLE DIMENSION**

Cab to axle will be 118".

### **CAB/CHASSIS PREPAYMENT**

The specified cab/chassis shall be prepaid by North Central Region within 30 days of invoice. North Central Region understands that if payment is made after 30 days, additional interest charges may apply.

### **CHASSIS MODIFICATIONS**

### **LUBRICATION AND TIRE DATA PLATE**

A permanent label in the driving compartment shall specify the quantity and type of the following fluids used in the vehicle and tire information:

- Engine oil
- Engine coolant
- Chassis transmission fluid
- Pump transmission lubrication fluid . . (if applicable)
- Pump priming system fluid, if applicable . . (if applicable)
- Drive axle(s) lubrication fluid
- Air conditioning refrigerant . . (if applicable)
- Air conditioning lubrication oil . . (if applicable)
- Power steering fluid
- Cab tilt mechanism fluid . . (if applicable)
- Transfer case fluid . . (if applicable)
- Equipment rack fluid (if applicable)
- CAFS air compressor system lubricant . . (if applicable)
- Generator system lubricant . . (if applicable)
- Front tire cold pressure
- Rear tire cold pressure
- Maximum tire speed ratings

### **VEHICLE DATA PLATE**

A permanent label in the driving compartment which indicates the following:

- Filter part numbers for the;
  - Engine
  - Transmission
  - Air
  - Fuel
- Serial numbers for the;
  - Engine
  - Transmission
- Delivered Weights of the Front and Rear Axles
- Paint Brand and Code(s)
- Sales Order Number

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### **OVERALL HEIGHT, LENGTH DATA PLATE (US)**

The fire apparatus manufacturer shall permanently affix a high-visibility label in a location visible to the driver while seated.

The label shall show the height of the completed unequipped vehicle in feet and inches (meters), the length of the completed vehicle in feet and inches (meters to nearest 1/10th), and the GVWR in tons (metric tons).

Wording on the label shall indicate that; "The information shown was current when the apparatus was manufactured. If the overall height changes while the vehicle is in service, the fire department must revise that dimension on the plate".

### **PERSONNEL CAPACITY**

A label that states the number of personnel the vehicle is designed to carry shall be located in an area visible to the driver.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### **SEAT BELT WARNING - FAMA06/07**

A safety sign FAMA06 shall be visible from each seat that is not equipped with occupant restraint and therefore not intended to be occupied while the vehicle is in motion.

A safety sign FAMA07, which warns of the importance of seat belt use, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

### **EQUIPMENT MOUNTING FAMA10**

A safety sign FAMA10, which warns of the need to secure items in the cab, shall be visible inside the cab.

### **FIRE SERVICE TIRES - FAMA12**

A safety sign FAMA12, which warns of the special requirements for fire service-rated tires, shall be visible to the driver entering the cab of any apparatus so equipped.

### **HELMET WARNING - FAMA15**

A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

### **CLIMBING METHOD - FAMA23**

A safety sign FAMA23, which warns of the proper climbing method, shall be visible to personnel entering the cab and at each designated climbing location on the body.

### **REAR STEP CROSSWALK WARNING - FAMA24**

A safety sign FAMA24, which warns personnel not to ride on the vehicle, shall be located at the rear step areas and at any cross walkways.

### **FINAL STAGE MANUFACTURER VEHICLE CERTIFICATION**

A final stage manufacturer vehicle certification label shall be provided and installed in the driver cab door jamb area.

### **FRONT BUMPER**

The front bumper shall be as provided by the cab/chassis manufacturer. No other alteration or modifications are required to extension length.

### **BUMPER GRAVELSHIELD**

The bumper extension gravel shield shall be provided by the cab/chassis manufacturer.

### **FRONT TOW PROVISIONS**

The front tow provisions shall be supplied and installed by the cab/chassis manufacturer.

### **AIR INTAKE SYSTEM**

An air filter shall be provided in the engine's air intake system by the commercial cab/chassis manufacturer. Air inlet restrictions shall not exceed the engine manufacturer's recommendations.

The air inlet shall be equipped with a means of separating water and burning embers from the air intake system.



# North Central Region(Boulder PD)

## SVI #1130- Production Specification

This requirement shall be permitted to be achieved by either of the following methods:

1. Provision of a device such that burning particulate matter larger than 0.039 in. (1.0 mm) in diameter cannot reach the air filter element.
2. Provision of a multi screen ember separator capable of meeting the test requirements defined in the Parker Hannafin, Racor Division, publication LF 1093-90, *Ember Separation Test Procedure*, or an equivalent test.

### **AIR RESTRICTION INDICATOR**

An air restriction indicator shall be re-mounted, or provided in the driving compartment and visible to the driver.

### **EXHAUST**

The exhaust system shall be as provided by cab/chassis manufacturer. The tailpipe may require some modifications for proper ground clearances and fit with body.

The exhaust piping and discharge outlet shall be located or shielded so as not to expose any portion of the vehicle or equipment to excessive heating.

Exhaust pipe discharge shall be directed away from any operator's position or entry doors on body.

Where parts of the exhaust system are exposed so that they are likely to cause injury to operating personnel, protective guards shall be provided.

### **RADIO/ANTENNA INSTALLATION**

There shall be one (1) North Central Region supplied radio(s) with antenna installed in the cab within easy reach of driver. The location of radio shall be determined by the North Central Region at the pre-construction meeting. All required radio programming shall be responsibility of North Central Region. Radio(s) may not be fully tested if no radio program is provided with radio and will be responsibility of North Central Region after delivery.

Radio shall be installed per Manufacturer's requirements and wired for proper 12 volt power and ground.

**Radio will be a Harris Model.**

### **SCBA SEAT AIR PACK BRACKETS**

No SCBA air pack bracket(s) shall be provided in specified commercial cab SCBA seats. North Central Region will provide and install necessary bracket(s) after delivery.

### **SEAT BELT COLOR**

Section 14.1.3.4 of the NFPA 1901 Standards, requires all seat belt webbing in cab to be bright red or bright orange in color, and the buckle portion of the seat belt shall be mounted on a rigid or semi rigid stalk such that the buckle remains positioned in an accessible location.

### **SEAT BELT WEB LENGTH - COMMERCIAL CAB**

Sections 14.1.3.2 and 14.1.3.3 of the NFPA 1901 standards, require the effective seat belt web length for a Type 1 lap belt for pelvic restraint to be a minimum of 60", and a Type 2 pelvic and upper torso restraint-style seat belt assembly to be a minimum of 110".

The chassis seat belt web length as supplied by the commercial chassis manufacturer will not be compliant to NFPA Standards 14.1.3.2 and 14.1.3.3.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

Per North Central Region specification for a commercial chassis, this emergency vehicle may not have seat belts of this required length. These belts may not provide sufficient length for large firefighters in bunker gear. This specification for an emergency fire apparatus for these seat belts shall be non-compliant to NFPA 1901 standards, effective at the time of order.

### **IGNITION KEY**

If the vehicle is specified to have an ignition key it will be attached to steering column or dash with vinyl covered steel cable.

### **SIX (6) – LED TIRE PRESSURE VISUAL INDICATORS**

Each tire valve stem shall be equipped with an LED Tire Alert (or equal), heavy duty valve cap LED indicator that indicates proper tire pressure. The LED Tire Alert valve cap is self-calibrating. When the cap is mounted on the valve stem the first time, it will memorize that tire pressure, and can be set to recognize a drop in pressure as little as 6 psi. It can be checked for functionality and battery condition by simply unscrewing the cap. If it is in working condition, it will immediately start blinking.

### **HELMET STORAGE**

No helmet storage is required in the cab driving area. A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

### **HELMET STORAGE**

No helmet storage is required in the cab crew area. A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

### **CAB TESTING CERTIFICATION**

Section 14.3.2 of the NFPA 1901 standards, 2009 edition, require the cabs on apparatus with a GVWR greater than 26,000 lb. (11,800 kg) shall meet the requirements of one of the following sets of standards:

- 1) European Occupant Protection Standard ECE Regulation No. 29.
- 2) SAE J2422 Cab Roof Strength Evaluation - Quasi-Static Loading Heavy Trucks.

Per North Central Region specification for a commercial chassis, this emergency vehicle may not have a cab that has been tested to these standards. This specification for an emergency fire apparatus for the cab testing requirements shall be non-compliant to NFPA 1901 standards, effective at the time of the bid opening.

### **CAB MIRRORS, DRIVER ADJUSTABLE**

Section 14.3.5 of the NFPA 1901 Standards, 2009 edition, requires all primary rear view mirrors used by the driver to be adjustable from the driver's position.

### **CAB STEP OVERLAY**

One (1) of the cab/chassis supplied entry steps will be overlaid with 1/8" NFPA compliant aluminum treadplate non-skid stepping surface.

The maximum stepping height shall not exceed 18", with the exception of the ground to first step, which shall not exceed 24" when the vehicle is loaded to its estimated in-service weight. All steps shall have a minimum area of 35 sq in and shall be of such a shape that a 5" diameter disk does not overlap any side when placed on the step, and shall be arranged to provide a t least 8" of clearance between the leading edge of the step and any

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

obstruction. All platforms shall have a minimum depth of 8" from the leading edge of the platform to any obstruction.

### **MUDFLAPS**

There shall be 1/4" rubber mudflaps provided and installed behind each set of tires to prevent throwing road debris and lower road spray.

### **AIR BRAKE SYSTEM QUICK BUILD-UP - STYLE 'M' / INDUSTRIAL INLET CONNECTION**

There shall be one (1) male, quick connect type inlet to provide air to the chassis air tanks from a station/external compressed air shoreline in order to maintain full operating air pressure while the vehicle is not running. The system shall include a one-way check valve to prevent accidental release of chassis air pressure and be labeled "AIR INLET".

- Air inlet shall be located near driver's door.
- The fitting will be of style 'M' / Industrial design.

The inlet shall eliminate the need for a quick build up system and the 60 second buildup time.

The female end of the connector shall be supplied by the North Central Region.

### **CHASSIS ENGINE COOLING SYSTEM DRAIN VALVES**

Readily accessible drain valves shall be installed at the lowest point of the cooling system and at such other points as are necessary to permit complete removal of the coolant from the system.

Drain valves shall be designed or positioned such that they will not open accidentally.

### **ROAD EMERGENCY SAFETY KIT**

The completed unit shall be supplied with one (1) set of three (3) dual faced reflective triangles, and three (3) warning flares complete with storage case per DOT requirements.

One (1) 2.5 lb. ABC type vehicle fire extinguisher with bracket per DOT requirements shall be provided and mounted inside cab area.

### **BODY DESIGN**

The importance of public safety associated with emergency vehicles requires that the construction of this vehicle meet the following specifications. These specifications are written to establish the minimum level of quality and design. All Bidders shall be required to meet these minimum requirements.

It is the intent of these specifications to fully describe the requirements for a custom built emergency type vehicle. In order to extend the expected service life of this vehicle, the body module shall be removable from the chassis frame and be capable of being installed on a new chassis.

The sheet metal material requirements, including alloy and material thickness, throughout the specifications are considered to be a minimum. Since such materials are available to all Manufacturers, the material specifications shall be strictly adhered to.

The fabrication of the body shall be formed sheet metal. Formed components shall allow the North Central Region to have the body repaired locally in the case where any object has struck the body and caused damage. The use

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

of proprietary extrusions will prevent the North Central Region from such repair and shall NOT be used. All fabricated body components to be cut by a laser or water-jet for superior cut edge quality.

Following construction of the subframe, which supports the apparatus body, the sheet metal portion of the body shall be built directly on the subframe. The joining of the subframe and body shall be of a welded integral construction.

The sheet metal fabrication of the body shall be performed using inert gas continuous feed welders only. The entire body shall be welded construction. The use of pop rivets in any portion of structural construction may allow premature failure of the body structure. Therefore, pop rivets shall NOT be used in the construction of the structural portions of the body. This includes side body sheets, inner panels of compartment doors, and any other structural portions of the body.

### **EXTERIOR ALUMINUM BODY**

The fabrication of the body shall be constructed from aluminum 3003H-14 alloy smooth plate. This shall include compartment front panel, vertical side sheets, side upper rollover panels, rear panels and compartment door frames.

The body compartment floors and exterior panels shall be constructed with not less than 3/16" (.187) aluminum 3003H-14 smooth plate. Interior compartment dividing walls shall be constructed with not less than 1/8" (.125) aluminum 3003H-14 smooth plate. Lighter gauge sheet metal will not be acceptable in these areas, No Exceptions.

The front and rear corners of body shall be formed as part of the front or rear body panels. This provides a stronger body corner and finished appearance. The use of extruded corners, or caps will not be acceptable, No Exceptions.

The door side frame openings shall be formed "C" channel design. An electrical wiring conduit raceway running the full length of exterior compartments shall be provided. This raceway shall contain all 12 volt wiring running to the rear of the apparatus, permitting easy accessibility to wiring.

Individual compartment modules, with dead air space voids between compartments, will not be an acceptable method of compartment construction.

The compartments shall be an integral part of the body construction. Compartment floors from front of body to ahead of rear axle, also from rear axle to rear of body shall be single one-piece sections. Compartment floors shall be preformed, then positioned in body and welded into final position.

Compartment floors shall have a "sweep-out" design with door opening threshold positioned lower than compartment floor, permitting easy cleaning of compartments. Angles, lips, or door moldings are not acceptable in the base of compartment door opening. One-way rubber drain valves shall be provided in compartment floors so that a water hose may be used to flush-out compartment area.

All exterior seams in sheet metal below frame, and around the rear wheel well area shall be welded and caulked to prevent moisture from entering the compartments. All other interior seams and corners shall be sealed with silicone based caulk prior to painting.

Only stainless steel bolts, nuts, and sheet metal screws shall be used in mounting exterior trim, hardware and equipment.

### **DRIP RAILS**

The body shall have drip rails over the side full height compartments. The drip rails shall be formed into the upper body panels providing a ridged lower panel and a flat upper body panel surface. The use of mechanically fastened, taped or glued on drip rails will not be acceptable, No Exceptions.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### **ROOF CONSTRUCTION**

The roof structure shall be integral with the body sheet metal construction and shall be an all welded assembly. The body roof structure shall be overlaid with not less than 3/16" aluminum 3003H-14 alloy tread plate and welded to roof structure and body sheet metal. All seams in roof material shall be fully and continuously welded to prevent entry of moisture.

There shall be a total of four (4) 2" x 2" x 1/4" 6061-T6 alloy aluminum "C" channels running the length of body, two (2) on each outboard side. These "C" channels shall be used for roof support and in addition shall be used for mounting of any specified reels. This open "C" channel design along with special reel mounting clips allows for a universal location of any specified reels within each compartment.

In between the two (2) center "C" channels running the length of body shall be 2" x 2" x 1/4" 6061-T6 alloy aluminum tubing running in between and welded in place on approximate 16" centers to support roof and/or walkway structure if specified.

A 2" formed radius shall be provided along the body sides and utilized as a wiring trough. The use of aluminum extrusions in this area shall not be acceptable, .

### **BODY SUBFRAME**

The chassis frame rails shall be fitted with 1/4" custom extruded UHMW polyethylene rail cap to isolate the body frame members from direct contact with chassis frame rails.

The body subframe shall be constructed from 6061T6 aluminum alloy tubing. Subframe shall consist of two (2) 2" x 4" x 1/4" aluminum tubes minimum, the same width as the chassis frame rails. Welded to this tubing shall be cross members of 2" x 4" x 1/4" aluminum. Smaller dimension, lighter gauge tubing or angle material subframe shall not be accepted.

These cross members shall extend the full width of the body to support the compartments. Cross members shall be located at front and rear of the body, below compartment divider walls, and in front and rear of wheel well opening. Additional aluminum cross members shall be located on 16" centers, or as necessary to support walkway or heavy equipment.

To form the frame, the tubing shall be beveled and welded at each joint using 5356 aluminum alloy welding wire.

### **BODY MOUNTING**

The body subframe shall be fastened to the chassis frame with a minimum of six (6) spring loaded body mounts. Each mount shall be configured using a two-piece encapsulated slide bracket. The two (2) brackets shall be fabricated of heavy duty 1/4" thick steel and shall have a powder coat finish to prevent any corrosion. Each mounting assembly shall utilize two (2) 3/4" diameter x 6" long grade 8 bolts and two (2) heavy duty springs. The assembly design shall allow the body and subframe to act as one (1) component, separate from the chassis. As the chassis frame twists under driving conditions, the spring mounting system shall eliminate any stress from being transferred into the body. The spring loaded body mounts shall also prevent frame side rail or body damage caused by unevenly distributed stress and strains due to load and chassis movement.

Body mountings that do not allow relief from chassis movement will not be acceptable.

### **10" REAR STEP BUMPER**

The full width rear bumper shall be constructed from 2" x 2" x 1/4" aluminum tubing frame and covered with 3/16" NFPA compliant aluminum tread plate. The bumper shall extend from the rear vertical body panel 10" and provide a rear step with a minimum of 1/2" space at body for water drainage.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### **REAR TOW EYES**

There shall be two (2) heavy duty rear mounted tow eyes securely attached to the body subframe, below body. The tow eyes shall be fabricated from 3/4" thick steel plate with a 3" diameter opening. Tow eyes shall have a black powder coat finish.

### **GROUND LIGHTS**

There shall be two (2) OnScene 8" Access LED lights installed below bumper capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting shall be switchable but activated automatically when the vehicle park brake is set.

### **WHEEL WELL EXTERIOR PANEL**

The exterior panel of the body wheel well enclosure shall be constructed from 3/16" smooth aluminum panels.

### **RUBBER BODY FENDERS**

The body wheel well openings shall be provided with round radius, black rubber fenderettes. The fenderettes shall be bolted and easily replaceable if damaged. The fenderettes shall be installed using stainless steel fasteners with plastic isolators to help prevent corrosion.

### **WHEEL WELL LINERS**

The wheel wells shall be provided with an easily removable polymer, circular inner fender liner. The inner liner shall be bolted to the wheel well with stainless steel bolts and spaced away from the wheel well so the liner will not accumulate dirt or water.

### **BODY PAINT SPECIFICATIONS**

#### **BODY PAINT PREPARATION**

After the body and components have been fabricated they shall be disassembled so when vehicle is complete there shall be finish paint beneath the removable components. The body shall be removed from chassis during the paint process to insure proper paint coverage. The body and components shall be metal finished as follows to provide a superior substrate for painting.

The exterior (and interior, if painted) body shall undergo a thorough cleaning process starting with a biodegradable phosphoric acid solution to begin the etching process followed by a complete clear water rinse. The next step shall consist of a chemical conversion coating applied to seal the metal substrate and become part of the metal surface for greater film adhesion.

All bright metal fittings, if unavailable in stainless steel or polished aluminum, shall be chrome plated. Iron fittings shall be copper under plated prior to chrome plating.

#### **PAINT PROCESS**

The paint process shall follow the strict standards set forth by PPG Industries guidelines. Painters applying PPG products will be PPG Certified Commercial Technicians, and re-certified every two (2) years. The body shall go through the following paint process;

- 1) Clean bare metal with a wax and grease remover using low lint rags.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

- 2) Inspect, straighten, and hammer high points, grind all seams, sharp edges, and welds. DA sand entire paintable surfaces using 24-180 grit dry paper. Plastic fill all low spots and DA sand fill areas using 36-180 grit dry paper. Apply pinhole filler and DA sand areas using 80-180 grit dry paper.
- 3) Re-clean bare metal using a wax and grease remover and low lint rags.
- 4) Within 24 hours, a PPG Delfleet® epoxy color primer with proper hardener for corrosion resistance using a pressure pot spray gun and applying 2-5 full wet coats or 1.5-8.0 dry mils max. achieving full hiding and allow to air dry 60 minutes @ 70°F or bake for 45 minutes @ 140°F degree.
- 5) Inspect, putty fill, and dry guild coat entire body surface and DA sand using 180-400 grit dry paper.
- 6) Re-clean bare metal using a wax and grease remover using low lint rags.
- 7) A PPG Delfleet® primer sealer with proper hardener and thinner shall be sprayed using a pressure pot spray gun and applying 1 full wet coat or 1.0-2.0 dry mils achieving full hiding and allow to flash off in spray booth for minimum of 60 minutes @ 70°F.
- 8) A PPG Delfleet® FBCH basecoat (color) with proper hardener and dry additive shall then be sprayed using a pressure pot set @ 45-60 PSI and achieving full hiding or 1.5-2.0 wet mils and allow to flash off in spray booth 45-60 minutes before applying clearcoat.
- 9) A PPG Delfleet® clearcoat with proper hardener and thinner shall be sprayed using a pressure pot spray gun and applying 2-3 full wet coats or 5.0 wet mils for a uniform gloss and allow to flash off in spray booth 10 minutes and bake for 120-140 minutes @ 125°F (surface temp.).
- 10) After cooling, DA sand heavy orange peel or runs using 1000 grit dry sand paper and final DA sand using 1500-2000 grit dry sand paper. Wipe off all surfaces to remove dust and debris. Buff unit as needed using 3M rubbing compound and a white wool pad and inspect until all sand scratches are removed.
- 11) Polish as needed using 3M Perfect-It-Polish and a black foam pad, repeat as necessary and inspect until all sand scratches are removed.

### **PAINT - ENVIRONMENTAL IMPACT**

The contractor shall meet or exceed all current State (his) regulations concerning paint operations. Pollution control shall include measures to protect the atmosphere, water and soil. PPG Delfleet® Evolution paint shall be free of all heavy metal (lead & chromate) components. Paint emissions from sanding and painting shall be filtered and collected. All paint wastes shall be disposed of in an environmentally safe manner. Solvents used in cleanup operations shall be collected, sent off-site for distillation and returned for reuse.

### **FASTENERS**

Prior to the assembly and reinstallation of exterior components; i.e. warning and DOT lights, handrails, steps, door hardware, and miscellaneous items, a Mylar isolation tape, or gasket shall be used to prevent damage to the finish painted surface. These components shall be fastened to body using either a plastic insert into body metal with stainless steel screws or zinc coated nut-surts into body surface using stainless steel bolts to prevent corrosion from dissimilar metals.

### **ELECTROLYSIS CORROSION CONTROL**

The vehicle shall be assembled using ECK brand or similar corrosion control compound on all high corrosion potential areas.

ECK protects aluminum and stainless steel against electrolytic reaction, isolates dissimilar metals and gives bedding protection for hardware and fasteners. ECK contains anti-seizing lubricant for threads. ECK is dielectric and perfect for use with electrical connectors.

### **PAINT FINISH - SINGLE COLOR**

The body shall be painted with a single color of PPG Delfleet® Evolution per North Central Region approved paint spray out provided.

A small touch-up bottle of paint shall be provided with completed vehicle.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

- Paint Color: Match cab/chassis supplied paint color.

### **BODY UNDERCOATING**

The entire underside of body shall be sprayed with black automotive undercoating. Undercoating shall cover all areas underside of body and wheel well area to help prevent corrosion under the vehicle.

### **UNDERCOAT WARRANTY**

The body undercoating shall have a warranty provided by the manufacturer for the lifetime of the vehicle or twenty (20) years, whichever occurs first. The warranty shall be transferable between vehicle owners. Should the undercoating material applied to the underside of the body and wheel wells of the vehicle ever flake off, peel, chip or crack due to drying out, the damaged area shall be re-sprayed without charge to the vehicle owner.

### **PAINT WARRANTY**

The vehicle shall be provided with a ten (10) year non-prorated warranty to the original owner. Warranty is provided by PPG Inc. A warranty sheet with all conditions and maintenance procedures shall be provided with the delivered vehicle. **Pro-rated warranties will not be acceptable.**

### **COMPARTMENT INTERIOR FINISH**

The interior of all exterior body compartments shall be a "Maintenance Free" smooth unpainted finish. All body seams shall be finished with a caulk sealant for both appearance and moisture protection.

### **REFLECTIVE STRIPE**

No reflective stripe is required for this unit.

### **LETTERING**

#### **GRAPHICS PROOF**

A color graphics proof of the lettering layout shall be provided for approval by North Central Region prior to installation. The graphics proof shall be submitted to North Central Region on 8.5" x 11" sheets with front, sides, rear and plan views, each on one (1) sheet. In addition if there is any special art work an additional sheet shall be provided showing all details.

The following lettering shall be provided and installed on the completed unit as follows;

#### **SIDE CAB DOOR LETTERING**

#### **UPPER BODY SIDE LETTERING**

There shall be forty seven (47) 6" high reflective letters furnished and installed on the vehicle.

"North West Strategic Response Truck"- On top of the logo

"Provided by NCR"- below logo.

- This reflective lettering shall be white in color.

#### **CUSTOM DECAL LOGO - 12" -18"**



# North Central Region(Boulder PD)

## SVI #1130- Production Specification

One (1) custom designed 12" - 18" 3M Scotchlite type retroreflective logo shall be provided and located on the completed vehicle. The exact design and/or artwork shall be provided by the North Central Region prior to construction.

One (1) copy of the above custom logo shall be provided and located on the completed vehicle as directed by North Central Region.

### **EXTERIOR COMPARTMENT DOORS**

#### **ROLL-UP DOOR CONSTRUCTION - ROBINSON (ROM)**

The vehicle shall be equipped with R•O•M Series IV roll-up exterior compartment doors. The R•O•M roll-up doors shall be complete with the following features;

Each shutter slat, track, bottom rail, and drip rail shall be constructed from anodized 6063 T6 aluminum. Shutter slats shall feature a double wall extrusion 0.315" thick with a concave interior surface to minimize loose equipment jamming the shutter door closed. Shutter slats shall feature an interlocking end shoe to prevent side to side binding of the shutter door during operation. Slat must have interlocking joints with an inverted locking flange. Slat inner seal shall be a one piece PVC extrusion; seal design will be such to prevent metal to metal contact while minimizing dirt and water from entering the compartment.

Shutter door track shall be one piece design with integral overlapping flange to provide a clean finished look without the need of caulk. Door track shall feature an extruded Santoprene rubber double lip low profile side seal with a silicone co-extruded back to reduce friction during shutter operation.

Shutter bottom rail shall be a one piece double wall extrusion with integrated finger pull. Finger pull shall be curved upward with a linear striated surface to improve operator grip while operating the shutter door. Bottom rail shall have a smooth contoured interior surface to prevent loose equipment from jamming the shutter door. Bottom rail seal shall be made from Santoprene; it will be a double "V" seal to prevent water and debris from entering compartment. Bottom rail lift bar shall be a one piece "D" shaped aluminum extrusion with linear striations to improve operator grip during operation. Lift bar shall have a wall thickness of 0.125". Lift bar shall be supported by no less than two pivot blocks; pivot blocks shall be constructed from Type 66 Glass filled reinforced nylon for superior strength. Bottom rail end blocks shall have incorporated drain holes which will allow any moisture that collects inside the extrusion to drain out.

Shutter door shall have an enclosed counter balance system. Counter balance system shall be 4" in diameter and held in place by two (2) heavy duty 18 gauge zinc plated plates. Counter balance system shall have two (2) over-molded rubber guide wheels to provide a smooth transition from vertical track to counter balance system; no foam material of any kind shall be permitted or used in this area.

The R•O•M Series IV roll-up compartment doors shall be free of manufacturing defects for a period of up to 7 years from date of purchase provided doors are used under conditions of normal use, regular periodic maintenance and service is performed, and doors were installed in accordance with R•O•M's instructions.

#### **ROM DOOR BOTTOM RAIL**

All exterior compartment doors shall have the standard 3.0" tall bottom rail extrusion for easy one (1) hand opening and closing.

The specified retroreflective stripe material shall be applied on the roll-up compartment doors. The stripe shall be precision machine cut for each door slat of the roll-up doors. Under no circumstance will the stripe material be cut on roll-up door surface.

#### **BODY HEIGHT MEASUREMENTS**

The vertical body dimensions shall be as follows:

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### AHEAD OF REAR AXLE

	<u>Description</u>	<u>Dimension</u>
A	Bottom of Subframe to Top of Body	64.0"
B	Bottom of Subframe to Bottom of Body	22.5"
C	Vertical Door Opening	
	-with roll-up door	67.5"
	-with hinged door	70.5"

### ABOVE REAR AXLE

	<u>Description</u>	<u>Dimension</u>
D	Vertical Door Opening - Above Rear Wheel	
	-with roll-up door	34.0"
	-with hinged door	37.5"

### BEHIND REAR AXLE

	<u>Description</u>	<u>Dimension</u>
E	Bottom of Subframe to Bottom of Body	20.0"
F	Vertical Door Opening	
	-with roll-up door	62.0"
	-with hinged door	65.5"

### GENERAL

	<u>Description</u>	<u>Dimension</u>
G	Bottom of Drip Rail to Top of Body	13.5"

(Dimensions are approximate and subject to change during construction or design process.)

### **BODY WIDTH DIMENSIONS**

The body shall be 100.0" wide, and 102.0" wide at drip rails. Interior compartment depth dimensions shall be approximately:

<u>Area Description</u>	<u>Dimension</u>
Transverse above subframe	95.0"
Compartment depth below subframe	24.5"

### **STREETSIDE COMPARTMENT - FRONT (S1)**

The interior useable compartment width shall be approximately 41.5" wide.

The compartment door opening shall be approximately 34.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed cylinder lock shall be provided on bottom rail of the roll-up door.
- One (1) nylon strap shall be provided to assist in closing the door.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

### **COMPARTMENT LAYOUT**


- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) SlideMaster SM2 series structural steel slide-out tray(s) with 70% extension rated for 1,000 lbs. with a base approximately 94" deep and as wide as the compartment layout or door opening permits, capable of extending out either side of the body located above the level of the chassis frame rails. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 1/2".

**NOTE: Leave room to add a half rack to the tray of the 30% that doesn't extend. (Department will supply and install)**

- The SlideMaster tray base shall be wet painted silver in color.
- The SlideMaster tray base shall have a gravity type latch mechanism which requires the manual rotation to unlock and lock.
- Vertical partitions shall be provided on slide-out tray base dividing the tray into left/right and fore aft sides. There shall be 32" remaining open on the streetside of tray for the Customer supplied and installed Data Rack. Immediately inside of the "Data Rack" there shall be a divider/support wall (T-Shaped) for the swinging Divider to attach to and pivot on. Customer will be installing TV/Monitors to either side of the swinging Divider. Outlets/Outlet Strip specified below shall be located on the stationary divider/support wall for the Customer to plug the Rack and TV's into.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

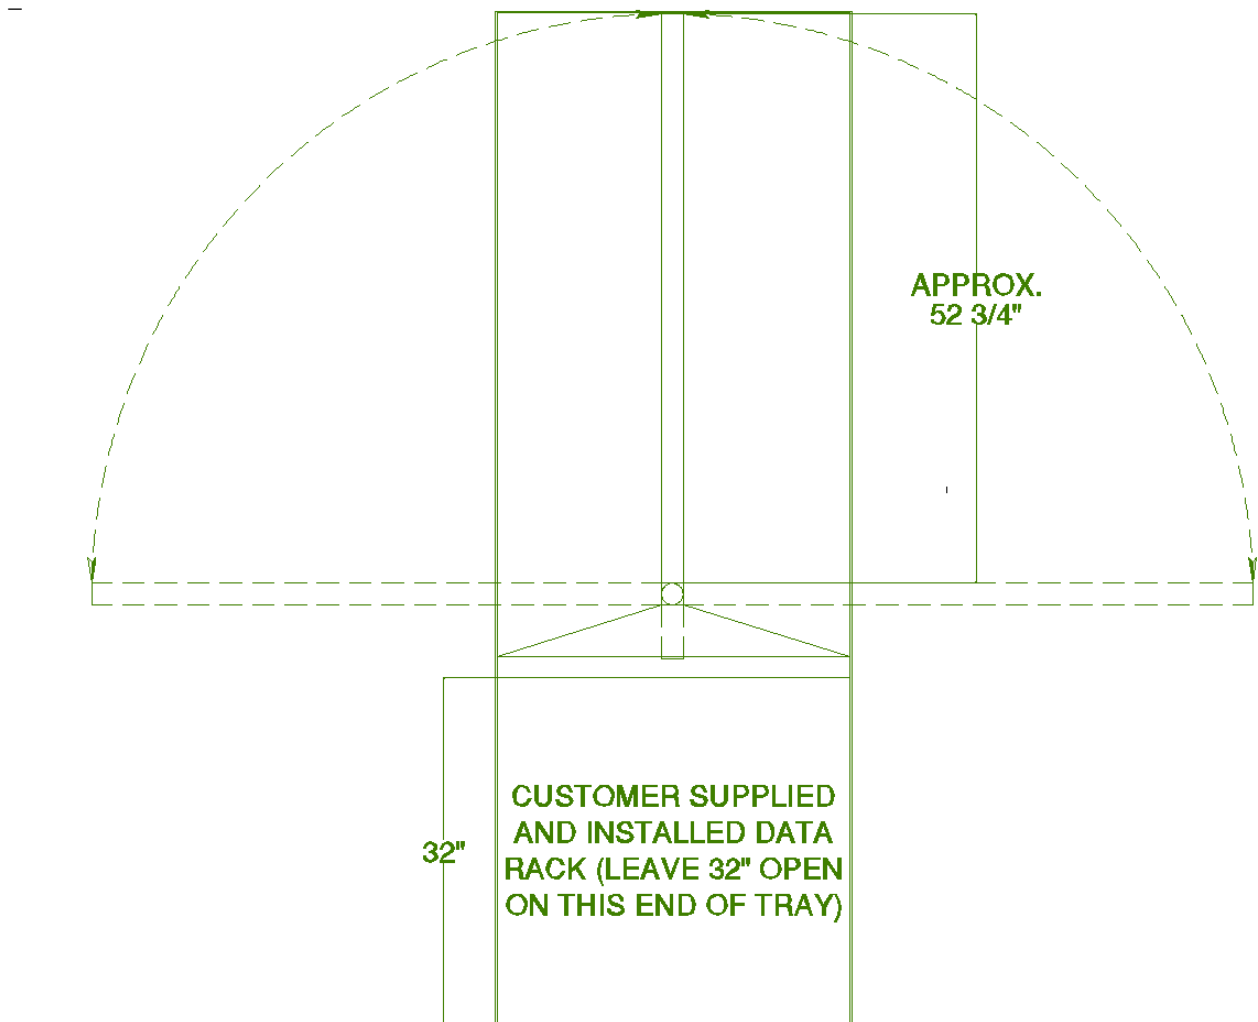

<sup>a</sup>  
smooth un-painted finish.

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- One (1) OnScene Access LED, full height compartment light, vertically mounted.
- There shall be one (1) 120 VAC outlet(s) located in compartment in center location with the TV mount pivots.
  - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
- There shall be one (1) approximate 4' long 120 VAC outlet strip(s) with straight blade household type outlets provided.
  - Outlet(s) shall be powered through the on-board generator system.
- The 12 volt electrical distribution panel shall be located in the front lower compartment.

### **STREETSIDE COMPARTMENT - AHEAD OF REAR WHEELS (S2)**

The interior useable compartment width shall be approximately 41.5" wide.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

The compartment door opening shall be approximately 34.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed cylinder lock shall be provided on bottom rail of the roll-up door.
- One (1) nylon strap shall be provided to assist in closing the door.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

### **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) SlideMaster SM2 series structural steel slide-out tray(s) with 70% extension rated for 1,000 lbs. with a base approximately 94" deep and as wide as the compartment layout or door opening permits, capable of extending out either side of the body located above the level of the chassis frame rails. It shall be vertically adjustable in height. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".
  - The SlideMaster tray base shall be wet painted silver in color.
  - The SlideMaster tray base shall have a gravity type latch mechanism which requires the manual rotation to unlock and lock.
  - Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.  
**Note: This partition will be holding ten (10) Avon SCBA's. Five (5) each side. Will NOT be sent to SVI for mounting.**
  - The above component(s) shall have a smooth un-painted finish.
- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- One (1) OnScene Access LED, full height compartment light, vertically mounted.
- There shall be one (1) 120 VAC outlet(s) located in lower part of compartment on the forward wall.
  - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

- Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

### **STREETSIDE COMPARTMENT - ABOVE REAR WHEELS (S3)**

The interior useable compartment width shall be approximately 59.5" wide.

The compartment door opening shall be approximately 52.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed cylinder lock shall be provided on bottom rail of the roll-up door.
- One (1) nylon strap shall be provided to assist in closing the door.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

### **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) adjustable shelf/shelves approximately 46" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges.
  - The above component(s) shall have a smooth un-painted finish.
- One (1) OnScene Access LED, full height compartment light, vertically mounted.
- There shall be one (1) 120 VAC outlet(s) located in compartment on the forward wall.
- There shall be one (1) 120 VAC, 20 amp custom fabricated outlet strip provided with four (4) 20 amp duplex outlets. Strip shall be approximately long.
  - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
  - Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.

### **STREETSIDE COMPARTMENT - REAR (S4)**

The interior useable compartment width shall be approximately 49.5" wide.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

The compartment door opening shall be approximately 42.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed cylinder lock shall be provided on bottom rail of the roll-up door.
- One (1) nylon strap shall be provided to assist in closing the door.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

### **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be two (2) adjustable shelf/shelves approximately 24" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edge.
  - The above component(s) shall have a smooth un-painted finish.
- There shall be one (1) SlideMaster SM3 series structural steel slide-out tray(s) with 100% extension rated for 1,000 lbs. with a base approximately 24" deep and as wide as the compartment layout or door opening permits located below the chassis frame rails. It shall be vertically adjustable in height. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".
  - The SlideMaster tray base shall be wet painted silver in color.
  - The SlideMaster tray base shall have a gravity type latch mechanism which requires the manual rotation to unlock and lock.
  - Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
  - The above component(s) shall have a smooth un-painted finish.
- The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
- One (1) OnScene Access LED, full height compartment light, vertically mounted.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### **CURBSIDE COMPARTMENT - FRONT (C1)**

The interior useable compartment width shall be approximately 41.5" wide.

The compartment door opening shall be approximately 34.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed cylinder lock shall be provided on bottom rail of the roll-up door.
- One (1) nylon strap shall be provided to assist in closing the door.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

### **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) SlideMaster SM2 series structural steel slide-out tray(s) with 70% extension rated for 1,000 lbs. with a base approximately 94" deep, capable of extending out either side of the body located above the level of the chassis frame rails. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".
  - The SlideMaster tray base shall be wet painted silver in color.
  - The SlideMaster tray base shall have a gravity type latch mechanism which requires the manual rotation to unlock and lock.
  - Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- One (1) OnScene Access LED, full height compartment light, vertically mounted.
- The generator gauge panel.
- There shall be one (1) 120 VAC outlet(s) located in compartment on the forward wall.
  - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).



# North Central Region(Boulder PD)

## SVI #1130- Production Specification

- There shall be one (1) approximate 4' long 120 VAC outlet strip(s) with straight blade household type outlets provided.
  - Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.

### **CURBSIDE COMPARTMENT - AHEAD OF REAR WHEEL (C2)**

The interior useable compartment width shall be approximately 41.5" wide.

The compartment door opening shall be approximately 34.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed cylinder lock shall be provided on bottom rail of the roll-up door.
- One (1) nylon strap shall be provided to assist in closing the door.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

### **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) SlideMaster SM2 series structural steel slide-out tray(s) with 70% extension rated for 1,000 lbs. with a base approximately 94" deep, capable of extending out either side of the body located above the level of the chassis frame rails. It shall be vertically adjustable in height. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 1/2".
  - The SlideMaster tray base shall be wet painted silver in color.
  - The SlideMaster tray base shall have a gravity type latch mechanism which requires the manual rotation to unlock and lock.
  - Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- One (1) OnScene Access LED, full height compartment light, vertically mounted.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

- There shall be one (1) 120 VAC outlet(s) located in compartment on the forward wall.
  - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
  - Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

### **CURBSIDE COMPARTMENT - ABOVE REAR WHEEL (C3)**

The interior useable compartment width shall be approximately 59.5" wide.

The compartment door opening shall be approximately 52.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed cylinder lock shall be provided on bottom rail of the roll-up door.
- One (1) nylon strap shall be provided to assist in closing the door.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

### **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) adjustable shelf/shelves approximately 46" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges.
  - The above component(s) shall have a smooth un-painted finish.
- One (1) OnScene Access LED, full height compartment light, vertically mounted.
- There shall be one (1) 120 VAC outlet(s) located in compartment on the forward wall.
- There shall be one (1) 120 VAC, 20 amp custom fabricated outlet strip provided with four (4) 20 amp duplex outlets. Strip shall be approximately long.
  - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
  - Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### **CURBSIDE COMPARTMENT - REAR (C4)**

The interior useable compartment width shall be approximately 49.5" wide.

The compartment door opening shall be approximately 42.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed cylinder lock shall be provided on bottom rail of the roll-up door.
- One (1) nylon strap shall be provided to assist in closing the door.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

### **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
- One (1) OnScene Access LED, full height compartment light, vertically mounted.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

### **REAR COMPARTMENT - CENTER (RC1)**

The rear center compartment shall be closed to both side rear compartments.

The rear center compartment shall begin just above the bumper height, between the chassis frame rails and be as high as the side compartments, unless specified otherwise. The body sub-frame shall extend to the back of the body, stopping just inside the door opening.

The interior useable compartment width shall be approximately 45.0" wide.

The compartment door opening shall be approximately 38.0" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door slats and the door track components shall be painted to match the single tone exterior color.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior door track to activate compartment lighting and door ajar signal in cab when door is opened.
- A keyed 1250 cylinder lock shall be provided on bottom rail of the roll-up door.
- The roll-up doors shall be manually operated with a key.
- One (1) nylon strap shall be provided to assist in closing the door.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

### **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) slide-out smooth aluminum vertical tool board(s) approximately 30" deep. Each tool board(s) vertical exterior edge shall have a double 90 degree formed edge to provide an easy grip handle. The top and bottom of tool board(s) shall be provided with Accuride 9300 series slide tracks. Each board shall be rated for a maximum 200 lbs. evenly distributed load. Each tool board shall utilize a pneumatic cylinder to hold the tool board in both the opened and closed positions.
  - The vertical tool board material shall be 3/16" (.188) 3003H-14 aluminum alloy sheet.
  - The above component(s) shall have a smooth un-painted finish.
  - Each tool board will be bolted to compartment floor.
- One (1) OnScene Access white LED, full height compartment light, vertically mounted.
- There shall be one (1) 120 VAC outlet(s) located in compartment on the forward wall.
  - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
  - Outlet(s) shall be powered by both the on-board generator and shore power system through a relay system.

### **UPPER BODY COMPARTMENT - CENTER REAR**

Above the exterior compartments shall be an upper body compartment for storage of long equipment. The compartment shall be integral with the body construction, and will not be bolted or added on modules. The compartment shall be approximately (insert actual dimensions).

Access to the compartment shall be from a rear facing lift-up compartment door. Door shall be fabricated from 3/16" smooth aluminum with full length 14 gauge stainless steel hinge, with 1/4" stainless steel pin, 6" non-locking stainless steel "D" ring handle, and a pair of gas cylinder door holders. A polyester barrier film gasket shall be placed between stainless steel hinge and any dissimilar metals as necessary to prevent corrosion. Door shall overlap body surface to prevent entry of moisture and sealed with automotive type rubber molding to provide a weather resistant seal.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

Compartment shall have a flush mounted light near door opening that will be automatically activated when door is opened, and wired to compartment door ajar warning light provided in cab.

Devices to secure equipment, compartment dividers, or UHMW plastic angles, or sheeting will be used for storage of specified equipment as required to prevent damage to equipment.

A step shall be provided above bumper directly below compartment to assist in access to compartment storage. Step shall be fabricated from NFPA compliant aluminum treadplate with minimum 8" depth, width sized to fit space available.

The compartment will be designed to store the following equipment;

- Two (2) 14' roof ladder(s). Customer will supply and install ladders, make the space accomodating.

### **ROOF ACCESS HANDRAIL**

There shall be one (1) 24" horizontal handrail on rear of body. Handrail shall be NFPA compliant 1-1/4" knurled 304 stainless steel with welded end stanchions.

A safety sign FAMA23, which warns of the proper climbing method, shall be visible to personnel entering the cab and at each designated climbing location on the body.

A safety sign FAMA24, which warns personnel not to ride on the vehicle, shall be located at the rear step areas and at any cross walkways.

### **FRONT GRAVEL GUARDS**

Gravel guards shall be provided on front lower body corners. Guards shall be 12" high, extend from behind cab or step and wrap around to the front compartment door opening fabricated from 20 gauge brushed stainless steel.

### **LOW VOLTAGE ELECTRICAL SYSTEM- 12 VDC**

#### General

Any low voltage electrical systems or warning devices installed on the fire apparatus shall be appropriate for the mounting location and intended electrical load.

Where wire passes through sheet metal, grommets shall be used to protect wire and wire looms. Electrical connections shall be with double crimp water-tight heat shrink connectors.

All 12 VDC wiring running from front to back of vehicle body shall be run in full length electrical wiring raceway down each side of body.

#### Wiring

All electrical circuit feeder wiring supplied and installed by the fire apparatus manufacturer shall meet the requirements of NFPA Chapter 13.

The circuit feeder wire shall be stranded copper or copper alloy conductors of a gauge rated to carry 125% of the maximum current for which the circuit is protected. Voltage drops in all wiring from the power source to the using device shall not exceed 10%. The use of star washers for circuit ground connections shall not be permitted.

All circuits shall otherwise be wired in conformance with SAE J1292, *Automobile, Truck, Truck-Tractor, Trailer, and Motor Coach Wiring*.

#### Wiring and Wire Harness Construction

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

All insulated wire and cable shall conform to SAE J1127, *Low Voltage Battery Cable*, or SAE J1128, *Low Voltage Primary Cable*, type SXL, GXL, or TXL.

All conductors shall be constructed in accordance with SAE J1127 or SAE J1128, except where good engineering practice dictates special strand construction. Conductor materials and stranding, other than copper, shall be permitted if all applicable requirements for physical, electrical, and environmental conditions are met as dictated by the end application. Physical and dimensional values of conductor insulation shall be in conformance with the requirements of SAE J1127 or SAE J1128, except where good engineering practice dictates special conductor insulation. The overall covering of conductors shall be moisture-resistant loom or braid that has a minimum continuous rating of 194°F (90°C) except where good engineering practice dictates special consideration for loom installations exposed to higher temperatures. The overall covering of jacketed cables shall be moisture resistant and have a minimum continuous temperature rating of 194°F (90°C), except where good engineering practice dictates special consideration for cable installations exposed to higher temperatures.

All wiring connections and terminations shall use a method that provides a positive mechanical and electrical connection. The wiring connections and terminations shall be installed in accordance with the device manufacturer's instructions. All ungrounded electrical terminals shall have protective covers or be in enclosures. Wire nut, insulation displacement, and insulation piercing connections shall not be used.

Wiring shall be restrained to prevent damage caused by chafing or ice buildup and protected against heat, liquid contaminants, or other environmental factors.

Wiring shall be uniquely identified at least every 2 ft (0.6 m) by color coding or permanent marking with a circuit function code. The identification shall reference a wiring diagram.

Circuits shall be provided with properly rated low voltage over current protective devices. Such devices shall be readily accessible and protected against heat in excess of the over current device's design range, mechanical damage, and water spray. Circuit protection shall be accomplished by utilizing fuses, circuit breakers, fusible links, or solid state equivalent devices.

If a mechanical-type device is used, it shall conform to one of the following SAE standards:

- 1) SAE J156, *Fusible Links*
- 2) SAE J553, *Circuit Breakers*
- 3) SAE J554, *Electric Fuses (Cartridge Type)*
- 4) SAE J1888, *High Current Time Lag Electric Fuses*
- 5) SAE J2077, *Miniature Blade Type Electrical Fuses*

Switches, relays, terminals, and connectors shall have a direct current (dc) rating of 125% of maximum current for which the circuit is protected.

### Power Supply

A 12 V or greater electrical alternator shall be provided. The alternator shall have a minimum output at idle to meet the minimum continuous electrical load of the vehicle, at 200°F (93°C) ambient temperature within the engine compartment, and shall be provided with full automatic regulation.

### Minimum Continuous Electrical Load

The minimum continuous electrical load shall consist of the total amperage required to simultaneously operate the following in a stationary mode during emergency operations:

- 1) The propulsion engine and transmission
- 2) All legally required clearance and marker lights, headlights, and other electrical devices except windshield wipers and four-way hazard flashers

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

- 3) The radio(s) at a duty cycle of 10 percent transmit and 90% receive (for calculation and testing purposes, a default value of 5 A continuous)
- 4) The lighting necessary to produce 2 fc (20 lx) of illumination on all walking surfaces on the apparatus and on the ground at all egress points onto and off the apparatus, 5 fc (50 lx) of illumination on all control and instrument panels, and 50 percent of the total compartment lighting loads
- 5) The minimum optical warning system, where the apparatus is blocking the right-of way
- 6) The continuous electrical current required to simultaneously operate any fire pumps, aerial devices, and hydraulic pumps
- 7) Other warning devices and electrical loads defined by the purchaser as critical to the mission of the apparatus

If the apparatus is equipped to tow a trailer, an additional 45 A shall be added to the minimum continuous electrical load to provide electrical power for the federally required clearance and marker lighting and the optical warning devices mounted on the trailer.

The condition of the low voltage electrical system shall be monitored by a warning system that provides both an audible and a visual signal to persons on, in, or near the apparatus of an impending electrical system failure caused by the excessive discharge of the battery set.

The charge status of the battery shall be determined either by direct measurement of the battery charge or indirectly by monitoring the electrical system voltage.

If electrical system voltage is monitored, the alarm shall sound if the system voltage at the battery or at the master load disconnect switch drops below 11.8 V for 12 V nominal systems, 23.6 V for 24 V nominal systems, or 35.4 V for 42 V nominal systems for more than 120 seconds.

A voltmeter shall be mounted on the driver's instrument panel to allow direct observation of the system voltage.

### Electromagnetic Interference

Electromagnetic interference suppression shall be provided, as required, to satisfy the radiation limits specified in SAE J551/1, *Performance Levels and Methods of Measurement of Electromagnetic Compatibility of Vehicles, Boats (up to 15 m), and Machines (16.6 Hz to 18 GHz)*.

### Wiring Diagram

A complete electrical wiring schematic of actual system shall be provided with finished apparatus. Similar or generic type electrical schematics shall NOT BE ACCEPTABLE.

### Low Voltage Electrical System Performance Test

A low voltage electrical system test certification shall be provided with delivered apparatus.

### **12 VOLT DIAGNOSTIC RELAY CONTROL CENTER**

The 12 volt power distribution shall be conveniently located with easy access for service. All relays and circuit breakers shall be plug-in type allowing for removal for repairs without necessitating soldering or tools. The sockets mounts for both the relays and circuit breakers shall be of a design that permits the use of standard automotive type components.

The 12 volt distribution panel shall utilize printed circuit boards mounted in high strength enclosure. Each printed circuit board shall be provided with twelve (12) heavy duty independent switching relays. Each relay shall have the ability to be configured either normally open or normally closed and be protected by a 20 amp automatic reset breaker. Each circuit will be provided with a LED for visual diagnostic.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

Power distribution panel shall be located in apparatus body within a protected enclosure with removable or hinged cover.

### **CAB CONSOLE**

A center cab console shall be provided between the Driver's and Officer's seats. Console shall be as large as possible and fabricated of 1/8" smooth aluminum. A textured powder coat paint finish shall be provided for durability and finished appearance.

The rear portion of the console shall be provided with open top storage for notebooks or maps. Two (2) adjustable dividers shall be provided in the storage area. The forward portion of console shall be slanted for mounting of siren head, radio or 12 volt control panel, and etc, with easy access to both Driver and Officer. Two (2) cup holders shall be provided in console.

The following options shall be provided in specified center console;

- There shall be one (1) communications radio and/or siren 3" recess mount(s) with black powdercoat paint finish in specified console.
- There shall be one (1) communications radio and/or siren 3" filler plate(s) with black powdercoat paint finish provided for future radio/siren location in specified console.
- There shall be one (1) 12 VDC power plug(s) provided in specified console.
- There shall be one (1) 120 VAC, 20 amp, duplex straight-blade receptacle (NEMA 5-20R) outlet(s) provided in specified console.
  - Outlet(s) shall be powered through the on-board generator system.
- There shall be two (2) Blue Sea 12 VDC USB port(s) provided in specified console.

### **MAP LIGHT**

There shall be one (1) 19" goose neck 12 volt map light(s) furnished and installed on the center console next to the Officer's position in the cab.

### **ELECTRICAL SYSTEM MANAGER**

The chassis shall contain an electrical system manager for:

- Monitoring chassis battery voltage
- Shedding pre-determined electrical circuits
- Sequencing pre-determined electrical circuits
- Automatically controlling chassis engine fast-idle
- Monitor master switch and parking brake applications
- Automatically control warning light modes ("Calling-For" and "Blocking Right of Way")
- Provide low voltage alarm
- Programmable control circuits
- Remote system status indicator panel

System manager shall perform all electrical functions required by current NFPA 1901 Standards.

The electrical system manager shall be supplied and installed by the cab/chassis manufacturer.



# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### **BATTERY SYSTEM**

The battery connectors shall be heavy duty type with cables terminating in heat shrink loom. Heavy duty battery cables shall provide maximum power to the electrical system. Where required, the cables shall be shielded from exhaust tubing and the muffler. Large rubber grommets shall be provided where cables enter the battery compartment.

Batteries shall be of the high-cycle type. With the engine off, the battery system shall be able to provide the minimum continuous electrical load for 10 minutes without discharging more than 50 percent of the reserve capacity and then to restart the engine. The battery system cold cranking amps (CCA) rating shall meet or exceed the minimum CCA recommendations of the engine manufacturer. The batteries shall be mounted to prevent movement during fire apparatus operation and shall be protected against accumulations of road spray, snow, and road debris. The batteries shall be readily accessible for examination, testing, and maintenance.

A means shall be provided for jump-starting the engine if the batteries are not accessible without lifting the cab of a tilt-cab apparatus.

Where an enclosed battery compartment is provided, it shall be ventilated to the exterior to prevent the buildup of heat and explosive fumes. The batteries shall be protected against vibration and temperatures that exceed the battery manufacturer's recommendation.

An onboard battery conditioner or charger or a polarized inlet shall be provided for charging all batteries. Where an onboard conditioner or charger is supplied, the associated line voltage electrical power system shall be installed in accordance with Chapter 22.

One of the following master disconnect switches shall be provided:

- 1) A master body disconnect switch that disconnects all electrical loads not provided by the chassis manufacturer
- 2) A master load disconnect switch that disconnects all electrical loads on the apparatus except the starter

Electronic control systems and similar devices shall be permitted to be otherwise connected if so specified by their manufacturer.

The alternator shall be wired directly to the batteries through the ammeter shunt(s), if one is provided, and not through the master load disconnect switch.

A green "battery disconnect on" indicator light that is visible from the driver's position shall be provided.

Rechargeable hand lights, radios, and other similar devices shall be permitted to be connected to the electrical system ahead of the master disconnect switch.

A sequential switching device shall be permitted to energize the optical warning devices and other high current devices required in minimum continuous electrical load, provided the switching device shall first energize the electrical devices required in minimum continuous electrical load within 5 seconds.

### **BATTERY SWITCH**

One (1) battery "On/Off" switch shall be provided and located in cab within easy reach of Driver. A green "BATTERY ON" pilot light shall be visible from the driver's position.

### **BATTERY SOLENOID**

Battery switch shall consist of a minimum 200 ampere, constant duty solenoid to feed from positive side of battery.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### **BATTERY CONDITIONER**

One (1) Kussmaul model Auto Charge 1000 single battery conditioner, with 120 VAC input and 15 amp, 12 volt output shall be provided. This system shall monitor the condition of batteries and provide an electrical current at variable rates to overcome battery failure. A display shall be provided with charge indicator, remote mounted.

### **SHORE POWER INLET**

One (1) Kussmaul 120 VAC, 30 amp Super Auto-Eject shore power inlet(s) shall be provided. The shore power connection shall automatically disengage from vehicle when chassis ignition is engaged.

The protective ground from the shoreline inlet shall be bonded to the vehicle frame.

- The outlet cover shall be Black.
- The shore power plug shall be located near the Driver door area.

### **ENGINE COMPARTMENT LIGHT**

Engine compartment light(s) shall be supplied and installed by the cab chassis manufacturer.

### **CAB HAZARD WARNING LIGHT**

A Truck-Lite red LED flashing light shall be provided and located in the driving compartment and be illuminated automatically whenever the vehicles parking brake is not fully engaged and any of the following conditions exist:

- Any passenger or equipment compartment door is not closed.
- Any ladder or equipment rack is not in the stowed position.
- Stabilizer system is not in its stowed position.
- Powered light tower is not stowed.
- Any other device permanently attached to the apparatus is open, extended, or deployed in a manner that is likely to cause damage to the apparatus if the apparatus is moved.

Compartments and equipment meeting all of the following conditions shall be permitted to be exempt from being wired to the hazard light:

- The volume is less than or equal to 4 ft<sup>3</sup> (0.1 m<sup>3</sup>).
- The compartment has an opening less than or equal to 144 in.<sup>2</sup> (92,900 mm<sup>2</sup>).
- The open door does not extend sideways beyond the mirrors or up above the top of the fire apparatus.
- All equipment in the compartment is restrained so that nothing can fall out if the door is open while the apparatus is moving.
- Manually raised pole lights with an extension of less than 5 ft (1.5 m).

The hazard light shall be labeled; "Do not move apparatus when light is on."

In addition, label shall be in both English/French for units built for Canada; "*Ne pas deplacer l'engin lorsque la lumiere est allumee.*"

An audible alarm shall be provided for the door ajar light.

### **BACK-UP ALARM**

An electronic back-up alarm shall be supplied and installed by the cab/chassis manufacturer. The back-up alarm shall actuate automatically when the transmission gear selector is placed in reverse.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### **REAR VIEW CAMERA**

There shall be one (1) ASA Voyager rear observation camera system provided and installed on completed unit. The system shall include one (1) model VCC150 high resolution CCD color camera installed on the rear body.

The camera image shall be displayed on a model AOM713, 7" color flat panel display (up to 3 camera inputs) located within the driver's range of view.

### **TAIL LIGHTS**

Rear body tail lights shall be vertically mounted and located per Federal Motor Vehicle Safety Standards, FMVSS and Canadian Motor Vehicle Safety Standards CMVSS. The following lights shall be provided;

- Two (2) Whelen C6T amber LED sequential arrow turn signal lights, amber lens
- Two (2) Whelen C6BTT red LED brake and tail lights, red lens
- Two (2) Whelen C6LCC white LED back-up lights, clear lens

Each of the lights above shall be mounted in a C6FC, chrome finish bezels.

### **MIDSHIP MARKER/TURN SIGNAL**

Two (2) Whelen model T0A00MAR 2" round amber LED midship body clearance marker/turn signal lights shall be provided and installed, one (1) light on each side of the body, in forward wheel well of rear axle. Midship marker/turn lights shall be wired to the headlight circuit of the chassis.

### **MARKER LIGHTS**

The body shall be equipped with all necessary side and rear clearance lights and reflectors in accordance with Federal Motor Vehicle Safety Standards (FMVSS) and Canadian Motor Vehicle Safety Standards (CMVSS). Clearance lights shall be Truck-Lite model 18 series, 3 diode LED, reflectorized type to reduce the need for maintenance and lower the amp draw. Clearance lights on body shall be connected to the clearance light circuit of the chassis.

### **CAB STEP LIGHTS / GROUND LIGHTS**

There shall be two (2) OnScene 8" Access LED light(s) installed on the vehicle capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting designed to provide illumination on areas under the driver and crew riding area exits shall be switchable but activated automatically when the exit doors are opened.

### **LICENSE PLATE LIGHT**

One (1) Arrow #437 chrome plated LED license plate light shall be installed on the rear of the body. License plate light shall be wired to the headlight circuit of chassis. A fastener system shall be provided for license plate installation.

### **ELECTRONIC SIREN**

One (1) Whelen model 295HFSA5 electronic siren control with selectable 100 or 200 watt output, air horn tone button, and 4-position 3-function slide switch control for warning lights, 5 push-button accessory switches, park kill, and hard wired microphone shall be provided and installed in cab within easy reach of Driver. Siren power shall be wired through the master warning light switch.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### **SIREN SPEAKER**

One (1) Whelen model SA314A 100 watt aluminum, 6.4" x 6.1" x 3.1" deep siren speaker shall be provided and located behind grill or front bumper with natural aluminum finish. The solid state siren speaker shall be vibration resistant. The SA314A shall comply with California Title XIII, Class A, and SAE J1849 requirements and with OSHA 1910.95 Guidelines regarding "Permissible Noise Exposure". All mounting hardware shall be stainless steel and covered by a two year factory warranty.

The siren speaker shall be located on the streetside of front bumper.

### **SIDE SCENE LIGHTS**

There shall be four (4) Whelen 900 Series Super-LED® model C9SL, 9" x 7" surface mounted scene lights shall be provided on the upper body. Light quantity shall be divided equally per side. The 900 configuration shall consist of 36 white Super-LEDs and a clear non optic polycarbonate lens with metalized SurfaceMax reflector with integrated optic collimators for maximum output. The 900 series light shall have 6,500 useable lumens each. Each light shall have a chrome flange. The scene light is covered by a five year factory warranty.

Two (2) switches shall be provided, one (1) for the streetside scene lights, and one (1) for the curbside scene lights.

The lights shall be controlled at the switch panel in cab.

### **REAR LED SCENE LIGHTS**

Two (2) Whelen 900 Series Super-LED® model C9SL, 9" x 7" surface mounted scene lights shall be provided on the upper rear body to light the work area immediately behind the vehicle. The 900 configuration shall consist of 36 white Super-LEDs and a clear non optic polycarbonate lens with metalized SurfaceMax reflector with integrated optic collimators for maximum output. The 900 series light shall have 6,500 useable lumens each. Each light shall have a chrome flange. The scene light is covered by a five year factory warranty.

The above scene lights shall light to a level of at least 3 fc (30 lx), measured at 25 equally spaced points on a 2.5 ft (750 mm) grid with in a 10 ft x 10 ft (3 m x 3m) square to the rear of vehicle.

The lights shall be controlled at the switch panel in cab.

The rear scene lights shall also be activated when the apparatus is in reverse.

### **WARNING LIGHT PACKAGE**

Each apparatus shall have a system of optical warning devices that meets or exceeds the requirements of this section.

The optical warning system shall consist of an upper and a lower warning level. The requirements for each level shall be met by the warning devices in that particular level without consideration of the warning devices in the other level.

For the purposes of defining and measuring the required optical performance, the upper and lower warning levels shall be divided into four (4) warning zones. The four zones shall be determined by lines drawn through the geometric center of the apparatus at 45 degrees to a line drawn lengthwise through the geometric center of the apparatus. The four (4) zones shall be designated A, B, C, and D in a clockwise direction, with zone A to the front of the apparatus.

Each optical warning device shall be installed on the apparatus and connected to the apparatus's electrical system in accordance with the requirements of this standard and the requirements of the manufacturer of the device.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

A master optical warning system switch that energizes all the optical warning devices shall be provided.

The optical warning system on the fire apparatus shall be capable of two (2) separate signaling modes during emergency operations. One (1) mode shall signal to drivers and pedestrians that the apparatus is responding to an emergency and is calling for the right-of-way. One (1) mode shall signal that the apparatus is stopped and is blocking the right-of-way. The use of some or all of the same warning lights shall be permitted for both modes provided the other requirements of this chapter are met.

A switching system shall be provided that senses the position of the parking brake or the park position of an automatic transmission. When the master optical warning system switch is closed and the parking brake is released or the automatic transmission is not in park, the warning devices signaling the call for the right-of-way shall be energized. When the master optical warning system switch is closed and the parking brake is on or the automatic transmission is in park, the warning devices signaling the blockage of the right-of-way shall be energized. The system shall be permitted to have a method of modifying the two (2) signaling modes.

The optical warning devices shall be constructed or arranged so as to avoid the projection of light, either directly or through mirrors, into any driving or crew compartment(s). The front optical warning devices shall be placed so as to maintain the maximum possible separation from the headlights.

Steadily burning, non flashing optical sources shall be permitted to be used.

### UPPER LEVEL OPTICAL WARNING DEVICES

The upper-level optical warning devices shall be mounted as high and as close to the corner points of the apparatus as is practical to define the clearance lines of the apparatus. The upper-level optical warning devices shall not be mounted above the maximum height, specified by the device manufacturer.

### ZONE A - FRONT WARNING LIGHTS

There shall be one (1) Whelen Freedom F4N0QLED LED 60" lightbar permanently mounted to the cab roof.

The lightbar configuration (streetside to curbside) shall be:

<u>SECTION</u>	<u>INTERNAL COMPONENTS</u>	<u>LENS COLOR</u>
1	Blue Side LED	Clear
2	Red Front Corner LED	Clear
3	Blank	Clear
4	White Super Long-LED	Clear
5	Red Super Long-LED	Clear
6	Blue Super Long-LED	Clear
7	Red Super Long-LED	Clear
8	Red Super Long-LED	Clear
9	Blue Super Long-LED	Clear
10	Blank	Clear
11	White Super Long-LED	Clear
12	Blank	Clear
13	Red Front Corner LED	Clear

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

14 Blue Side LED

Clear

All clear lights shall shut down when the parking brake is set to comply with "Blocking" mode requirements as outlined in NFPA 1901.

### SHOP NOTE

Add MK8H lightbar mount on Wecad program if there is a brow light on cab

The lightbar(s) shall be separately controlled at switch panel in the cab.

### ZONES B AND D - SIDE WARNING LIGHTS

#### UPPER REAR CORNER WARNING LIGHTS

There shall be two (2) Whelen C9 SurfaceMax series (9" x 7") red Linear Super-LED with full-fill optic lights provided, one (1) each side. The self-contained flashing light shall have 75 Scan-Lock™ flash patterns including steady burn with hi/low power and covered by a five year factory warranty. Each light shall have a red lens and chrome flange.

The lights shall be controlled at the switch panel in cab.

#### ZONE C - REAR WARNING LIGHTS

There shall be two (2) Whelen C9 SurfaceMax series (9" x 7") red Linear Super-LED with full-fill optic lights provided, one (1) each side. The self-contained flashing light shall have 75 Scan-Lock™ flash patterns including steady burn with hi/low power and covered by a five year factory warranty. Each light shall have a red lens and chrome flange.

The lights shall be controlled at the switch panel in cab.

### LOWER LEVEL OPTICAL WARNING DEVICES

To define the clearance lines of the apparatus, the optical center of the lower-level optical warning devices in the front of the vehicle shall be mounted on or forward of the front axle centerline and as close to the front corner points of the apparatus as is practical.

The optical center of the lower-level optical warning devices at the rear of the vehicle shall be mounted on or behind the rear axle centerline and as close to the rear corners of the apparatus as is practical. The optical center of any lower-level device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground for large apparatus, and 18 in. and 48 in. (460 mm and 1600 mm) above level ground.

A midship optical warning device shall be mounted right and the left sides of the apparatus if the distance between the front and rear lower-level optical devices exceeds 25 ft (7.6 m) at the optical center. Additional midship optical warning devices shall be required, where necessary, to maintain a horizontal distance between the centers of adjacent lower-level optical warning devices of 25 ft (7.6 m) or less. The optical center of any midship mounted optical warning device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground.

### ZONE A - FRONT WARNING LIGHTS

There shall be two (2) Whelen C6 SurfaceMax series (6" x 4") red Linear Super-LED with full-fill optic lights provided, one (1) each side. The self-contained flashing light shall have 75 Scan-Lock™ flash patterns including steady burn with hi/low power and covered by a five year factory warranty. Each light shall have a red lens and chrome flange.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

The lights shall be controlled at the switch panel in cab.

### ZONES B AND D - CAB INTERSECTOR LIGHT (CAB FRONT CORNERS)

There shall be two (2) Whelen C6 SurfaceMax series (6" x 4") red Linear Super-LED with full-fill optic lights provided, one (1) each side. The self-contained flashing light shall have 75 Scan-Lock™ flash patterns including steady burn with hi/low power and covered by a five year factory warranty. Each light shall have a red lens and chrome flange.

The lights shall be controlled at the switch panel in cab.

### ZONES B AND D - BODY LIGHT (BODY WHEELWELL AREA)

There shall be two (2) Whelen C6 SurfaceMax series (6" x 4") red Linear Super-LED with full-fill optic lights provided, one (1) each side. The self-contained flashing light shall have 75 Scan-Lock™ flash patterns including steady burn with hi/low power and covered by a five year factory warranty. Each light shall have a red lens and chrome flange.

The lights shall be controlled at the switch panel in cab.

### ZONES B AND D - BODY INTERSECTOR LIGHT (BODY REAR CORNERS)

There shall be two (2) Whelen C6 SurfaceMax series (6" x 4") red Linear Super-LED with full-fill optic lights provided, one (1) each side. The self-contained flashing light shall have 75 Scan-Lock™ flash patterns including steady burn with hi/low power and covered by a five year factory warranty. Each light shall have a red lens and chrome flange.

The lights shall be controlled at the switch panel in cab.

### ZONE C - REAR WARNING LIGHTS (LOWER REAR CORNERS)

There shall be two (2) Whelen C6 SurfaceMax series (6" x 4") red Linear Super-LED with full-fill optic lights provided, one (1) each side. The self-contained flashing light shall have 75 Scan-Lock™ flash patterns including steady burn with hi/low power and covered by a five year factory warranty. Each light shall have a red lens and chrome flange.

The lights shall be controlled at the switch panel in cab.

## LINE VOLTAGE ELECTRICAL SYSTEM

### ONAN PTO GENERATOR

The vehicle shall be equipped with an Onan Protec PTO generator system with a capacity of 15,000 watts at 120/240 VAC, 125/62 amps, single phase. Current frequency shall be stable at 60 hertz.

The transmission's PTO port and PTO, or the split shaft PTO, and all associated drive shaft components shall be rated to support the continuous duty torque requirements of the generator's continuous duty rating as stated on the power source nameplate.

Where the generator is driven by the chassis engine and transmission through a split shaft PTO, the driving compartment speedometer shall register when the generator drive system is engaged.

Where the generator is driven by the chassis engine and transmission through a split shaft PTO and a chassis transmission retarder is furnished, it shall be automatically disengaged for generator operations.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

The direct drive generator shall be mounted so that it does not change the ramp break-over angle, angle of departure, or angle of approach as defined by other components, and it shall not extend into the ground clearance area.

The direct drive generator shall be mounted away from exhaust and muffler areas or provided with a heat shield to reduce operating temperatures in the generator area.

### **GENERATOR BONDING**

A minimum of four (4) 16" x 2 gauge copper ground straps shall be bolted to body sub-frame and chassis sub-frame for proper bonding of high voltage system. The conductor shall have a minimum amperage rating, as defined in 310.15, "Ampacities for Conductors Rated 0–2000 Volts," of *NFPA 70*, of 115 percent of the rated amperage on the power source specification label.

### **GENERATOR ENGAGEMENT**

A "Generator Engaged" indicator shall be provided in the driving compartment to indicate that the generator shift has been successfully completed.

An "OK to Operate Generator" indicator shall be provided in the driving compartment to indicate that the generator is engaged (if not always engaged), the transmission is in the proper gear (if required, automatic transmissions only), and the parking brake is engaged (if applicable).

An interlock system shall be provided to prevent advancement of the engine speed in the driving compartment or at any operator's panel unless the parking brake is engaged, and the transmission is in neutral or the output of the transmission is correctly connected to a pump or generator instead of the drive wheels.

### **WARRANTY PERIOD**

Provided such goods are operated and maintained in accordance with Onan's written instructions, Onan warrants that the Protec YDCR series PTO generators shall be free from defects in material and workmanship for a period of five (5) years or one thousand (1,000) hours, whichever comes first, from the date of delivery to the first purchaser.

### **GENERATOR SPLASH GUARD**

A powder coat painted splash cover shall be installed to reduce the amount of road spray on the frame mounted PTO generator. A V-ring seal shall also be installed in the cover to provide additional protection against contaminants reaching the generator front seals.

### **GENERATOR CONTROL**

The generator shall be engaged at the switch panel in the cab.

### **GENERATOR MOUNTING**

The generator shall be mounted between the chassis frame rails. The generator mounting brackets shall be fabricated using heavy duty steel tubing, or structural channel. The generator mounting shall be bolted and removable so that the generator can be lowered from under apparatus for service, if necessary. The generator case shall not extend below the bottom edge of the apparatus body.

### **MANUALS AND SCHEMATICS**

Two (2) complete manuals on parts list, maintenance, wiring schematics, hydraulic schematics, circuit boards, voltage regulator board and other components shall be provided on delivery.



# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### **POWER-TAKE-OFF GENERATOR DRIVE**

There shall be a "Hot Shift" power-take-off (PTO) installed on the transmission PTO opening of the chassis. The "Hot Shift" PTO is provided to allow the engagement of the PTO at higher engine RPM speeds. The PTO output shall be connected to the generator through hollow tube type driveline with heavy duty universals.

The engagement of the PTO shall be in the chassis cab with a rocker switch and red pilot light to note engagement of the PTO or via the V-Mux screen if so equipped.

The power supply to the PTO engagement control shall be wired to the parking brake and a neutral position transmission switch to prevent engagement unless the vehicle is stopped and transmission has been placed in neutral.

The installation of the engine, transmission, driven accessories (power takeoffs (PTO), etc.) shall meet the engine and transmission manufacturers' installation recommendations for the service intended.

Model part number shall be Chelsea 280 series.

Double check the model number and ratio with engineering before ordering the PTO on the chassis.

### **ENGINE SPEED CONTROL**

An engine speed auxiliary control device (high idle switch or throttle) shall be installed to maintain a stable cycle output from generator when the apparatus is parked.

An interlock shall prevent the operation of the engine speed auxiliary control device unless the parking brake is engaged and the transmission is in neutral or park, or the parking brake is engaged and the engine is disengaged from the drive wheels.

The engine shall be prevented from regulating its own engine speed during times when engine rpm control is critical for consistent apparatus functions such as generator, water pump, or aerial operation.

### **LOADCENTER**

The loadcenter shall be an Eaton BR Series specifically designed for protection and distribution of AC line voltage such as lighting and small motor branch circuits. The loadcenter enclosure is made of 16 gauge galvanized sheet steel with a galvanized coating provided for corrosion protection. All trims used on BR loadcenters are chromate sealed and finished with an electro-disposition epoxy paint (ANSI-61) which exceeds requirements for outdoor and indoor applications. A combination surface/flush cover with integral door is supplied with indoor loadcenters rated from 100 through 400 amperes. All plug-in loadcenters are CSA listed to file LL98266. CSA Certified to C22.2 No.29, to loadcenter type and CSA listing.

### **GENERATOR MONITORING PANEL**

An Accuvim CL digital meter package shall be provided to properly monitor the generator performance and load demand during operation. The electrical parameters can be viewed on a backlit LCD screen. The 15 screens are accessible via four buttons on the front panel allowing the user to scroll between various screens. The following shall be displayed full-time;

- Generator frequency in hertz
- Line 1 current in amperes
- Line 2 current in amperes
- Generator voltage in volts

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

In addition, an elapsed generator hours gauge shall be provided near the digital meter.

### **SHORE POWER INLET - BATTERY CHARGER**

The above mentioned shore power inlet, and battery conditioner shall be specified in the 12 volt section.

### **LINE VOLTAGE ELECTRICAL SYSTEM**

#### **GENERAL REQUIREMENTS**

##### Stability

Any fixed line voltage power source producing alternating current (ac) shall produce electric power at 60 Hz,  $\pm 3$  Hz when producing power at all levels between no load and full rated power. Any fixed line voltage power source shall produce electric power at the rated voltage  $\pm 10$  percent when producing power at all levels between no load and full rated power.

The maximum voltage supplied to portable equipment shall not exceed 275 volts to ground. Higher voltage shall be permitted only when used to operate fixed wired, permanently mounted equipment on the apparatus.

##### Conformance with National Electrical Code

All components, equipment, and installation procedures shall conform to *NFPA 70, National Electrical Code*, except where superseded by the requirements of this chapter. Where the requirements of this chapter differ from those in *NFPA 70*, the requirements in this chapter shall apply.

Where available, line voltage electrical system equipment and materials included on the apparatus shall be listed and used only in the manner for which they have been listed. All equipment and materials shall be installed in accordance with the manufacturer's instructions.

##### Location Ratings

Any equipment used in a dry location shall be listed for dry locations. Any equipment used in a wet location shall be listed for wet locations.

Any equipment, except a PTO-driven generator, used in an underbody or under chassis location that is subject to road spray shall be either listed as Type 4 or mounted in an enclosure that is listed as Type 4.

If a PTO-driven generator is located in an underbody or under chassis location, the installation shall include a shield to prevent road spray from splashing directly on the generator.

##### Grounding

Grounding shall be in accordance with 250.34(A) and 250.34(B) of *NFPA 70*. Ungrounded systems shall not be used.

Only stranded or braided copper conductors shall be used for grounding and bonding.

The grounded current-carrying conductor (neutral) shall be insulated from the equipment-grounding conductors and from the equipment enclosures and other grounded parts.

The neutral conductor shall be colored white or gray in accordance with 200.6, "Means of Identifying Grounded Conductors," of *NFPA 70*.

Any bonding screws, straps, or buses in the distribution panel board or in other system components between the neutral and equipment-grounding conductor shall be removed and discarded.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### Bonding

The neutral conductor of the power source shall be bonded to the vehicle frame. The neutral bonding connection shall occur only at the power source. In addition to the bonding required for the low voltage return current, each body and each driving or crew compartment enclosure shall be bonded to the vehicle frame by a copper conductor.

The conductor shall have a minimum amperage rating, as defined in 310.15, "Ampacities for Conductors Rated 0–2000 Volts," of *NFPA 70*, of 115 percent of the rated amperage on the power source specification label.

A single conductor that is sized to meet the low voltage and line voltage requirements shall be permitted to be used.

### Ground Fault Circuit Interrupters

In special service vehicles incorporating a lavatory, sink, toilet, shower, or tub, 120 V, 15 or 20 A receptacles within 6 ft (1.8 m) of these fixtures shall have ground fault circuit interrupter (GFCI) protection. GFCIs integrated into outlets or circuit breakers or as stand-alone devices shall be permitted to be used in situations.

### Power Source General Requirements

All power source system mechanical and electrical components shall be sized to support the continuous duty nameplate rating of the power source.

The power source shall be shielded from contamination that would prevent the power source from operating within its design specifications.

### Power Source Rating

For power sources of 8 kW or larger, the power source manufacturer shall declare the continuous duty rating that the power source can provide when installed on fire apparatus according to the manufacturer's instructions and run at 120°F (49°C) air intake temperature at 2000 ft (600 m) above sea level.

The rating on the power source specification label shall not exceed the declared rating from the power source manufacturer.

Access shall be provided to permit both routine maintenance and removal of the power source for major servicing. The power source shall be located such that neither it nor its mounting brackets interfere with the routine maintenance of the fire apparatus.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### Instrumentation

If the power source is rated at less than 3 kW, a "Power On" indicator shall be provided. If the power source is rated at 3 kW or more but less than 8 kW, a voltmeter shall be provided.

If the power source is rated at 8 kW or more, the following instrumentation shall be provided at an operator's panel:

- 1) Voltmeter
- 2) Current meters for each ungrounded leg
- 3) Frequency (Hz) meter
- 4) Power source hour meter

The instrumentation shall be permanently mounted at an operator's panel. The instruments shall be located in a plane facing the operator. Gauges, switches, or other instruments on this panel shall each have a label to indicate their function.

The instruments and other line voltage equipment and controls shall be protected from mechanical damage and not obstructed by tool mounting or equipment storage.

An instruction plate(s) that provides the operator with the essential power source operating instructions, including the power-up and power-down sequence, shall be permanently attached to the apparatus at any point where such operations can take place.

### Operation

Provisions shall be made for placing the generator drive system in operation using controls and switches that are identified and within convenient reach of the operator.

Where the generator is driven by the chassis engine and engine compression brakes or engine exhaust brakes are furnished, they shall be automatically disengaged for generator operations.

Any control device used in the generator system power train between the engine and the generator shall be equipped with a means to prevent unintentional movement of the control device from its set position in the power generation mode.

If there is permanent wiring on the apparatus that is designed to be connected to the power source, a power source specification label that is permanently attached to the apparatus at the operator's control station shall provide the operator with the information required.

The power source, at any load, shall not produce a noise level that exceeds 90 dBA in any driving compartment, crew compartment, or onboard command area with windows and doors closed or at any operator's station on the apparatus.

### Power Supply Assembly

The conductors used in the power supply assembly between the output terminals of the power source and the main over current protection device shall not exceed 12 ft (4 m) in length.

All power supply assembly conductors, including neutral and grounding conductors, shall have an equivalent ampere rating and shall be sized to carry not less than 115 percent of the ampere of the nameplate current rating of the power source.

If the power supply assembly connects to the vibrating part of a generator (not a connection on the base), the conductors shall be flexible cord or other fine-stranded conductors enclosed in metallic or nonmetallic liquid tight flexible conduit rated for wet locations and temperatures not less than 194°F (90°C).

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### Over-current Protection

Manually re-settable over current devices shall be installed to protect the line voltage electrical system components.

### Power Source Protection

A main over current protection device shall be provided that is either incorporated in the power source or connected to the power source by a power supply assembly.

The size of the main over current protection device shall not exceed 100 percent of the rated amperage stated on the power source specification label or the rating of the next larger available size over current protection device, where so recommended by the power source manufacturer.

If the main over current protection device is subject to road spray, the unit shall be housed in a Type 4-rated enclosure.

### Branch Circuit Over-current Protection

Over current protection devices shall be provided for each individual circuit and shall be sized at not less than 15 amps in accordance with 240.4, "Protection of Conductors," of *NFPA 70*.

Any panel board shall have a main breaker where the panel has six or more individual branch circuits or the power source is rated 8 kW or larger.

Each over current protection device shall be marked with a label to identify the function of the circuit it protects.

Dedicated circuits shall be provided for any large appliance or device (air conditioning units, large motors, etc.) that requires 60 percent or more of the rated capacity of the circuit to which it is connected, and that circuit shall serve no other purpose.

### Panelboards

All fixed power sources shall be hardwired to a permanently mounted panel board unless one of the following conditions exists:

- 1) All line voltage power connections are made through receptacles on the power source and the receptacles are protected by integrated over current devices.
- 2) Only one circuit is hardwired to the power source, which is protected by an integrated over current device.

The panel shall be visible and located so that there is unimpeded access to the panel board controls. All panel boards shall be designed for use in their intended location. The panel(s) shall be protected from mechanical damage, tool mounting, and equipment storage.

Where the power source is 120/240 V and 120 V loads are connected, the apparatus manufacturer or line voltage system installer shall consider load balancing to the extent that it is possible.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### Wiring Methods

Fixed wiring systems shall be limited to the following:

- 1) Metallic or nonmetallic liquid tight flexible conduit rated at temperatures not less than 194°F (90°C) with stranded copper wire rated for wet locations and temperatures not less than 194°F (90°C)
- 2) Type SOW, SOOW, SEOW, or SEOOW flexible cord rated at 600 V and at temperatures not less than 194°F (90°C)

Electrical cord or conduit shall not be attached to chassis suspension components, water or fuel lines, air or air brake lines, fire pump piping, hydraulic lines, exhaust system components, or low voltage wiring and shall be arranged as follows:

- 1) Separated by a minimum distance of 12 in. (300 mm) from exhaust piping or shielded from such piping
- 2) Separated from fuel lines by a minimum distance of 6 in. (150 mm)

A means shall be provided to allow "flexing" between the driving and crew compartment, the body, and other areas or equipment whose movement would stress the wiring.

Electrical cord or conduit shall be supported within 6 in. (150 mm) of any junction box and at a minimum of every 24 in. (600 mm) of run.

Supports shall be made of nonmetallic materials or of corrosion-resistant or corrosion-protected metal. All supports shall be of a design that does not cut or abrade the conduit or cord and shall be mechanically fastened to the apparatus.

Only fittings and components listed for the type of cord or conduit being installed shall be used.

Splices shall be made only in a listed junction box.

### Additional Requirements for Flexible Cord Installations

Where flexible cord is used in any location where it could be damaged, it shall be protected by installation in conduit, enclosures, or guards.

Where flexible cord penetrates a metal surface, rubber or plastic grommets or bushings shall be installed.

### Wiring Identification

Each line voltage circuit originating from the main panel board shall be identified.

The wire or circuit identification either shall reference a wiring diagram or wire list or shall indicate the final termination point of the circuit.

Where pre-wiring for future power sources or devices exists, the un-terminated ends shall be marked with a label showing their wire size and intended function.

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

### Wiring System Components

Only stranded copper conductors with an insulation rated for temperatures of at least 194°F (90°C) and wet locations shall be used. Conductors in flexible cord shall be sized in accordance with Table 400.5(A) of *NFPA 70*. Conductors used in conduit shall be sized in accordance with 310.15, "Ampacities for Conductors Rated 0–2000 Volts," of *NFPA 70*. Aluminum or copper-clad aluminum conductors shall not be used.

All boxes shall conform to and be mounted in accordance with Article 314, "Outlet, Device, Pull, and Junction Boxes; Conduit Bodies; Fittings; and Manholes," of *NFPA 70*. All boxes shall be accessible using ordinary hand tools. Boxes shall not be permitted behind welded or pop-riveted panels.

The maximum number of conductors permitted in any box shall be in accordance with 314.16, "Number of Conductors in Outlet, Device, and Junction Boxes, and Conduit Bodies," of *NFPA 70*.

All wiring connections and terminations shall provide a positive mechanical and electrical connection. Connectors shall be installed in accordance with the manufacturer's instructions. Wire nuts or insulation displacement and insulation piercing connectors shall not be used.

Each switch shall indicate the position of its contact points (i.e., open or closed) and shall be rated for the continuous operation of the load being controlled. All switches shall be marked with a label indicating the function of the switch. Circuit breakers used as switches shall be "switch rated" (SWD) or better. Switches shall simultaneously open all associated line voltage conductors. Switching of the neutral conductor alone shall not be permitted.

Line voltage circuits controlled by low voltage circuits shall be wired through properly rated relays in listed enclosures that control all non-grounded current-carrying conductors.

### Receptacles and Inlet Devices

#### Wet and Dry Locations

All wet location receptacle outlets and inlet devices, including those on hardwired, remote power distribution boxes, shall be of the grounding type, provided with a wet location cover, and installed in accordance with Section 406.8, "Receptacles in Damp or Wet Locations," of *NFPA 70*.

All receptacles located in a wet location shall be not less than 24 in. (600 mm) from the ground. Receptacles on off road fire apparatus shall be a minimum of 30 in. (750 mm) from the ground. All receptacles located in a dry location shall be of the grounding type and shall be at least 12 in. (300 mm) above the interior floor height. No receptacle shall be installed in a face-up position.

The face of any wet location receptacle shall be installed in a plane from vertical to not more than 45 degrees off vertical.

#### Receptacle Label

Each receptacle shall be marked with a label indicating the nominal line voltage (120 volts or 240 volts) and the current rating in amps of the circuit. If the receptacle is DC or other than single phase, that information shall also be marked on the label.

All receptacles and electrical inlet devices shall be listed to UL 498, *Standard for Safety Attachment Plugs and Receptacles*, or other recognized performance standards.

Receptacles used for DC voltages shall be rated for DC service.

### Wiring Schematics

# North Central Region(Boulder PD)

## SVI #1130- Production Specification

An "As-Built" Wiring diagrams for line voltage systems shall be provided to include the following information;

- (a) Pictorial representations of circuit logic for all electrical components and wiring
- (b) Circuit identification
- (c) Connector pin identification
- (d) Zone location of electrical components
- (e) Safety interlocks
- (f) Alternator–battery power distribution circuits
- (g) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems

### **120/240 VAC SCENE LIGHTING**

### **EQUIPMENT PAYLOAD WEIGHT ALLOWANCE**

In compliance with NFPA 1901 standards, the special service vehicle shall be designed for an equipment loading allowance of 4,000 lbs. of North Central Region provided equipment based on a 30,001 - 40,000 pound gross vehicle weight rating.

### **EQUIPMENT**

The following equipment shall be furnished with the completed special service vehicle;

- One (1) container of assorted stainless steel nuts, bolts, screws and washers used in the construction of the apparatus shall be provided with the completed apparatus.