

Clemson Fire & EMS
Clemson, SC
Heavy Rescue- SVI#1308
Production Specification



Customer Approval: _____
Date: _____

APPARATUS BRAND

The apparatus provided shall be a Sutphen Rescue of Sutphen Corporation.

INTERNET IN-PROCESS SITE

The manufacturer shall post and maintain a website where the Clemson Fire and EMS will be able to view digital images of their apparatus as its being built. The digital images shall be posted once a week starting when the body begins production and shall continue until the final completion of unit.

RESPONSIBILITY OF PURCHASER

It shall be the responsibility of the purchaser to specify the details of the apparatus in addition to the requirements in NFPA 1901 needed by the manufacturer to build the apparatus, including:

- 1) Requirements not uniquely specified in NFPA 1901, such as the type of apparatus desired.
- 2) Any features of the apparatus desired in addition to, or in excess of, the requirements in NFPA 1901.

After acceptance of the fire apparatus, the purchaser shall be responsible for ongoing training of personnel to develop and maintain proficiency regarding the proper and safe use of the apparatus and the associated equipment.

RESPONSIBILITY OF CONTRACTOR

The Contractor shall provide a detailed description of the apparatus, a list of equipment to be furnished, and other construction and performance details to which the apparatus shall conform. The detailed description of the apparatus shall include, but shall not be limited to,

1. Estimated In-Service Weight,
2. Wheelbase, Turning Clearance Radius,
3. Principal dimensions, Angle of Approach, Angle of Departure,
4. Transmission, Axle Ratios.

The Contractor's detailed description shall include a statement specifically describing each aspect of the delivered apparatus that will not be fully compliant with the requirements of this standard.

The purpose of these Contractor specifications shall be to define what the contractor intends to furnish and deliver to the purchaser.

Responsibility for the apparatus and equipment shall remain with the contractor until they are accepted by the purchaser.

VEHICLE STABILITY SUPPLIED WITH CAB/CHASSIS

The cab/chassis shall be equipped with a stability control system. The system shall have, at a minimum, a steering wheel position sensor, a vehicle yaw sensor, a lateral accelerometer and individual wheel brake controls.

FIRE APPARATUS PERFORMANCE

The fire apparatus shall meet the requirements of this standard at elevations of 2000 ft (600 m) above sea level.

The fire apparatus shall meet all the requirements of this standard while stationary on a grade of 6 percent in any direction.

The fire apparatus shall meet the requirements of this standard in ambient temperature conditions between 32°F (0°C) and 110°F (43°C).

HIGHWAY PERFORMANCE

The apparatus, when loaded to its estimated in-service weight, shall be capable of the following performance while on dry, paved roads that are in good condition:

- 1) Accelerating from 0 to 35 mph (55 km/hr) within 25 seconds on a 0 percent grade
- 2) Attaining a speed of 50 mph (80 km/hr) on a 0 percent grade
- 3) Maintaining a speed of at least 20 mph (32 km/hr) on any grade up to and including 6 percent

The maximum top speed of fire apparatus with a GVWR over 26,000 lb (11,800 kg) shall not exceed either 68 mph (109 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

If the combined water tank and foam agent tank capacities on the fire apparatus exceed 1250 gal (4732 L), or the GVWR of the vehicle is over 50,000 lb (22,680 kg), the maximum top speed of the apparatus shall not exceed either 60 mph (95 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

SERVICEABILITY

The fire apparatus shall be designed to allow the manufacturer's recommended routine maintenance checks of lubricant and fluid levels to be performed by the operator without lifting the cab of a tilt-cab apparatus or without the need for hand tools.

Where special tools are required for routine service on any component of the apparatus, such tools shall be provided with the apparatus.

Apparatus components that interfere with repair or removal of other major components shall be attached with fasteners, such as cap screws and nuts, so that the components can be removed and installed with ordinary hand tools. These components shall not be welded or otherwise permanently secured into place.

FIRE APPARATUS DOCUMENTATION

The contractor shall supply, at the time of delivery, at least one (1) copy of the following documents:

- 1) The manufacturer's record of apparatus construction details, including the following documents:
 - a) Owner's name and address
 - b) Apparatus manufacturer, model, and serial number
 - c) Chassis make, model, and serial number
 - d) GAWR of front and rear axles and GVWR
 - e) Front tire size and total rated capacity in pounds (kilograms)
 - f) Rear tire size and total rated capacity in pounds (kilograms)
 - g) Chassis weight distribution in pounds (kilograms) with water and manufacturer-mounted equipment (front and rear)

- h) Engine make, model, serial number, rated horsepower and related speed, and governed speed; and if so equipped, engine transmission PTO(s) make, model, and gear ratio
 - i) Type of fuel and fuel tank capacity
 - j) Electrical system voltage and alternator output in amps
 - k) Battery make, model, and capacity in cold cranking amps (CCA)
 - l) Chassis transmission make, model, and serial number; and if so equipped, chassis transmission PTO(s) make, model, and gear ratio
 - m) Ratios of all driving axles
 - n) Maximum governed road speed
 - o) Pump make, model, rated capacity in gallons per minute (liters per minute where applicable), maximum discharge pressure capability rating, and serial number
 - p) Pump transmission make, model, serial number, and gear ratio
 - q) Auxiliary pump make, model, rated capacity in gallons per minute (liters per minute where applicable), and serial number
 - r) Water tank certified capacity in gallons or liters
 - s) Foam tank (if provided) certified capacity in gallons (liters)
 - t) Aerial device type, rated vertical height in feet (meters), rated horizontal reach in feet (meters), and rated capacity in pounds (kilograms)
 - u) Paint manufacturer and paint number(s)
 - v) Company name and signature of responsible company representative
 - w) Weight documents from a certified scale showing actual loading on the front axle, rear axle(s), and overall fire apparatus (with the water tank full but without personnel, equipment, and hose)
- 2) Certification of compliance of the optical warning system (*see 13.8.16*)
 - 3) Siren manufacturer's certification of the siren (*see 13.9.1.1*)
 - 4) Written load analysis and results of the electrical system performance tests (*see 13.14.1 and Section 13.15*)
 - 5) Certification of slip resistance of all stepping, standing, and walking surfaces (*see 15.7.4.5*)
 - 6) If the apparatus has a fire pump, the pump manufacturer's certification of suction capability (*see 16.2.4.1*)
 - 7) If the apparatus is equipped with a fire pump and special conditions are specified by the purchaser, the pump manufacturer's certification of suction capacity under the special conditions (*see 16.2.4.2*)
 - 8) If the apparatus has a fire pump, a copy of the apparatus manufacturer's approval for stationary pumping applications (*see 16.3.1*)
 - 9) If the apparatus has a fire pump, the engine manufacturer's certified brake horsepower curve for the engine furnished, showing the maximum governed speed (*see 16.3.2.2*)
 - 10) If the apparatus has a fire pump, the pump manufacturer's certification of the hydrostatic test (*see 16.5.2.2*)
 - 11) If the apparatus has a fire pump with a maximum discharge pressure capability rating that exceeds the hydrostatic test pressure of 16.5.2.1, the pump manufacturer's certification of the hydrodynamic test
 - 12) If the apparatus has a fire pump, the certification of inspection and test for the fire pump (*see 16.13.1.1.5 or 16.13.1.2.4 as applicable*)
 - 13) If the apparatus is equipped with an auxiliary pump, the apparatus manufacturer's certification of the hydrostatic test (*see Section 17.13*)
 - 14) When the apparatus is equipped with a water tank, the certification of water tank capacity (*see Section 18.6*)
 - 15) If the apparatus has an aerial device, the certification of inspection and test for the aerial device (*see Section 19.24*)
 - 16) If the apparatus has an aerial device, all the technical information required for inspections to comply with NFPA 1911
 - 17) If the apparatus has a foam proportioning system, the foam proportioning system manufacturer's certification of accuracy (*see 20.10.4.2*) and the final installer's certification the foam proportioning system meets this standard (*see 20.11.2*)
 - 18) If the system has a CAFS, the documentation of the manufacturer's pre delivery tests (*see Section 21.9*)
 - 19) If the apparatus has a line voltage power source, the certification of the test for the power source (*see 22.15.7.2*)
 - 20) If the apparatus is equipped with an air system, air tank certificates (*see 24.5.1.2*), the SCBA fill station certification (*see 24.9.6*), and the results of the testing of the air system installation (*see 24.14.5 and 24.15.4*)
 - 21) Any other required manufacturer test data or reports

OPERATIONS AND SERVICE DOCUMENTATION

The contractor shall deliver with the fire apparatus complete operation and service documentation covering the completed apparatus as delivered and accepted.

The documentation shall address at least the inspection, service, and operations of the fire apparatus and all major components thereof.

The contractor shall also deliver with the fire apparatus the following documentation for the entire apparatus and each major operating system or major component of the apparatus:

- 1) Manufacturer's name and address
- 2) Country of manufacture
- 3) Source for service and technical information
- 4) Parts replacement information
- 5) Descriptions, specifications, and ratings of the chassis, pump (if applicable), and aerial device (if applicable)
- 6) Wiring diagrams for low voltage and line voltage systems to include the following information:
 - a) Pictorial representations of circuit logic for all electrical components and wiring
 - b) Circuit identification
 - c) Connector pin identification
 - d) Zone location of electrical components
 - e) Safety interlocks
 - f) Alternator–battery power distribution circuits
 - g) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems
- 7) Lubrication charts
- 8) Operating instructions for the chassis, any major components such as a pump or aerial device, and any auxiliary systems
- 9) Precautions related to multiple configurations of aerial devices, if applicable
- 10) Instructions regarding the frequency and procedure for recommended maintenance
- 11) Overall apparatus operating instructions
- 12) Safety considerations
- 13) Limitations of use
- 14) Inspection procedures
- 15) Recommended service procedures
- 16) Troubleshooting guide
- 17) Apparatus body, chassis and other component manufacturer's warranties
- 18) Special data required by this standard
- 19) A material safety data sheet (MSDS) for any fluid that is specified for use on the apparatus

The contractor shall deliver with the apparatus all manufacturer's operations and service documents supplied with components and equipment that are installed or supplied by the contractor.

NFPA REQUIRED DOCUMENTATION FORMAT - USB FLASH DRIVE

The vehicle construction details and the operations and service documentation as required per NFPA 1901 latest edition shall be provided on a USB Flash Drive. These manuals shall be divided into sections for ease of reference. There shall be two (2) USB flash drives provided with the completed vehicle.

FIRE APPARATUS SAFETY GUIDE

A Fire Apparatus Safety Guide published by Fire Apparatus manufacturer's Association shall be provided with delivered vehicle. This manual includes essential safety information for fire fighters, fire chiefs, apparatus mechanics, and fire department safety officers. The guide is applicable to municipal, wildland, and airport fire fighting apparatus manufactured on either custom or commercial chassis.

CARRYING CAPACITY

The GAWR and the GCWR or GVWR of the chassis shall be adequate to carry the weight of the completed vehicle when loaded to its estimated in-service weight. The manufacturer shall establish the estimated in service weight during the design of the vehicle.

The estimated in-service weight shall include the following:

1. The chassis, body and tank(s)
2. Full fuel, lubricant, and other chassis or component fluid tanks or reservoirs
3. Full water and other agent tanks
4. *250 lb (114 kg) in each seating position
5. Fixed equipment such as pumps, aerial devices, generators, reels and air systems as installed
6. Ground ladders, suction hose, designed hose load in their hose beds and on their reels
7. An allowance for miscellaneous equipment that is the greatest of the following:
 - a) The values shown for items 1 - 7
 - b) A purchaser-provided list of equipment to be carried with weights
 - c) A purchaser-specified miscellaneous equipment allowance

The manufacturer shall engineer and design the fire apparatus such that the completed apparatus, when loaded to its estimated in-service weight, with all movable weights distributed as close as is practical to their intended in-service configuration, does not exceed the GVWR.

A final manufacturer's certification of the GVWR or GCWR, along with a certification of each GAWR, shall be supplied on a label affixed to the vehicle.

The fire apparatus manufacturer shall permanently affix a high-visibility label in a location visible to the driver while seated.

The label shall show the height of the completed unequipped fire apparatus in feet and inches (meters), the length of the completed fire apparatus in feet and inches (meters), and the GVWR in tons (metric tons).

Wording on the label shall indicate that the information shown was current when the apparatus was manufactured and that, if the overall height changes while the vehicle is in service, the fire department must revise that dimension on the plate.

Apparatus Type	Equip. Storage Area	Apparatus Size	Equipment Allowance	
			lb.	kg.
Special Service Fire Apparatus	Minimum of 120 cu ft (3.4 cu mt) of enclosed compartmentation.	10,000 lb to 15,000 lb (4,500 kg to 7,000 kg) GVWR	2,000	910
		15,001 lb to 20,000 lb (7,001 kg to 9,000 kg)	2,500	1,135

		GVWR		
		20,001 lb to 30,000 lb (9,001 kg to 14,000 kg) GVWR	3,000	1,350
		30,001 lb to 40,000 lb (14,001 kg to 18,000 kg) GVWR	4,000	1,800
		40,001 lb to 50,000 lb (18,001 kg to 23,000 kg) GVWR	6,000	2,700
		50,001 lb to 60,000 lb (23,001 kg to 27,000 kg) GVWR	8,000	3,600
		60,001 lb and up (27,001 kg) GVWR	10,000	4,500

TESTING

ROAD TEST

Each apparatus shall be tested by the manufacturer before delivery to verify that it meets the following criteria;

Tests shall be conducted at a location and in a manner that does not violate local, state or provincial, or federal traffic laws. Tests shall be conducted on a dry, level, paved surface that is free of loose material, oil, or grease. Tests shall be conducted with the water and foam tanks full (water or product).

The apparatus shall accelerate from 0 to 35 mph (55 km/hr) within 25 seconds. The apparatus shall attain a speed of 50 mph (80 km/ hr).

The auxiliary braking system, if so equipped, shall function as intended by the auxiliary braking system manufacturer.

The air service brakes shall bring the apparatus to a complete stop from a speed of 20 mph (32.2 km/hr) in a distance not exceeding 35 ft (10.7 m).

The hydraulic service brakes shall bring the apparatus to a complete stop from a speed of 30 mph (48.2 km/hr) in a distance not exceeding 88 ft (26.8 m).

LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST

The vehicles low voltage electrical system shall be tested and certified by the manufacturer. The certified test results shall be delivered with the completed vehicle. Tests shall be performed when the air temperature is between 0°F and 110°F (-18°C and 43°C).

TEST SEQUENCE

The following three (3) tests shall be performed in the order in which they appear below. Before each test, the batteries shall be fully charged until the voltage stabilizes at the voltage regulator set point and the lowest charge current is maintained for ten (10) minutes. Failure of any of these tests shall require a repeat of the sequence.

1. RESERVE CAPACITY TEST

The engine shall be started and kept running until the engine and engine compartment temperatures are stabilized at normal operating temperatures and the battery system is fully charged. The engine shall be shut off and the minimum continuous electrical load shall be activated for ten (10) minutes.

All electrical loads shall be turned off prior to attempting to restart the engine. The battery system shall then be capable of restarting the engine. Failure to restart the engine shall be considered a test failure of the battery system.

2. ALTERNATOR PERFORMANCE TEST

TEST AT IDLE

The minimum continuous electrical load shall be activated with the engine running at idle speed. The engine temperature shall be stabilized at normal operating temperature. The battery system shall be tested to detect the presence of battery discharge current. The detection of battery discharge current shall be considered a test failure.

TEST AT FULL LOAD

The total continuous electrical load shall be activated with the engine running up to the engine manufacturer's governed speed. The test duration shall be a minimum of two (2) hours. Activation of the load management system shall be permitted during this test.

An alarm sounded by excessive battery discharge, as detected by the warning system required in 13.3.4, or a system voltage of less than 11.8 V dc for a 12 V nominal system, 23.6 V dc for a 24 V nominal system, or 35.4 V dc for a 42 V nominal system for more than 120 seconds shall be considered a test failure.

3. LOW VOLTAGE ALARM TEST

The following test shall be started with the engine off and the battery voltage at or above 12 V for a 12 V nominal system, 24 V for a 24 V nominal system or 36 V for a 42 V nominal system.

With the engine shut off, the total continuous electrical load shall be activated and shall continue to be applied until the excessive battery discharge alarm activates. The battery voltage shall be measured at the battery terminals.

The test shall be considered a failure if the alarm does not sound in less than 140 seconds after the voltage drops to 11.70 V for a 12 V nominal system, 23.4 V dc for a 24 V nominal system, or 35.1 V for a 42 V nominal system.

The battery system shall then be able to restart the engine. Failure to restart the engine shall be considered a test failure.

LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST

DOCUMENTATION

The manufacturer shall deliver the following with the fire apparatus:

- 1) Documentation of the electrical system performance tests
- 2) A written electrical load analysis, including the following:
 - a) The nameplate rating of the alternator
 - b) The alternator rating
 - c) Each of the component loads specified that make up the minimum continuous electrical load

- d) Additional electrical loads that, when added to the minimum continuous electrical load, determine the total continuous electrical load
- e) Each individual intermittent electrical load

UL 120/240 VAC CERTIFICATION

The 120/240 volt electrical system shall be third-party, independent, audit-certified through Underwriters Laboratory (UL) to the current edition of NFPA 1901 to perform as listed below;

The prime mover shall be started from a cold start condition, and the unloaded voltage and frequency shall be recorded.

The line voltage electrical system shall be loaded to at least 100% of the continuous rated wattage stated on the power source specification label. Testing with a resistive load bank shall be permitted.

The power source shall be operated in the manner specified by the apparatus manufacturer as documented on instruction plates or in operation manuals. The power source shall be operated at a minimum of 100% of the continuous rated wattage as stated on the power source specification label for a minimum of two (2) hours.

The load shall be adjusted to maintain the output wattage at or above the continuous rated wattage during the entire 2-hour test.

The following conditions shall be recorded at least every 1/2 hour during the test:

- 1) The power source output voltage, frequency and amperes
- 2) The prime mover's oil pressure, water temperature and transmission temperature, if applicable
- 3) The power source hydraulic fluid temperature, if applicable
- 4) The ambient temperature and power source air inlet temperature

The following conditions shall be recorded once during the test for power sources driven by dedicated auxiliary internal combustion engines:

- 1) Altitude
- 2) Barometric pressure
- 3) Relative humidity

If the generator is driven by the chassis engine and the generator allows for operation at variable speeds, the chassis engine speed shall be reduced to the lowest rpm allowed for generator operation and the voltage and frequency shall be recorded.

The load shall be removed and the unloaded voltage and frequency shall be recorded.

Voltage shall be maintained within $\pm 10\%$ of the voltage stated on the power source specification label during the entire test. Frequency shall be maintained within ± 3 Hz of the frequency stated on the power source specification label during the entire test.

The total continuous electrical loads, excluding those loads associated with the equipment defined in NFPA 22.15.7.3.11.2, shall be applied during the testing unless an auxiliary engine drives the power source.

If the apparatus is equipped with a fire pump, the 2-hour certification test of the power source shall be completed with the fire pump pumping at 100% capacity at 150 psi (1000 kPa) net pump pressure. The test shall be permitted to be run concurrently with the pump certification test.

DOCUMENTATION

The results of each test shall be recorded on an appropriate form and provided with the delivery of the fire apparatus.

DIELECTRIC VOLTAGE WITHSTAND TEST

The line voltage wiring and permanently connected devices and equipment shall be subjected to a dielectric voltage withstand test of 900 volts for one (1) minute. The testing shall be performed after all body work has been completed.

The test shall be conducted as follows:

- 1) Isolate the power source from the panel board and disconnect any solid state low voltage components
- 2) Connect one lead of the dielectric tester to all the hot and neutral buses tied together
- 3) Connect the other lead to the fire apparatus frame or body
- 4) Close any switches and circuit breakers in the circuit(s)
- 5) Apply the dielectric voltage for one (1) minute in accordance with the testing equipment manufacturer's instructions

The electrical polarity of all permanently wired equipment, cord reels and receptacles shall be tested to verify that wiring connections have been properly made.

Electrical continuity shall be verified from the chassis or body to all line voltage electrical enclosures, light housings, motor housings, light poles, switch boxes and receptacle ground connections that are accessible to fire fighters in normal operations.

If the apparatus is equipped with a transfer switch, it shall be tested to verify operation and that all non grounded conductors are switched.

Electrical light towers, floodlights, motors, fixed appliances and portable generators shall be operated at their full rating or capacity for 30 minutes to ensure proper operation.

WARRANTY

A full statement shall be provided of the warranties for the vehicle(s) being bid. Warranties should clearly describe the terms under which the vehicle manufacturer accepts responsibility for the cost to repair defects caused by faulty design, quality of work or material and for the applicable period of time after delivery.

Cost of repairs refers to all costs related thereto including, but not limited to, the cost of materials and the cost of labor.

The Body Manufacturer shall warrant all materials and accessories used on the vehicle(s), whether fabricated by manufacturer or purchased from an outside source and will deal directly with the Clemson Fire and EMS on all warranty work.

GENERAL LIMITED WARRANTY - TWO (2) YEARS

The vehicle shall be free of defects in material and workmanship for a period of two (2) years or 36,000 miles (or 57,936 kilometers), whichever occurs first starting thirty (30) days after the original invoice date.

The Contractor must be the "single source" coordinator of all warranties on the vehicle.

LOW VOLTAGE ELECTRICAL WARRANTY - FIVE (5) YEARS

The vehicle low voltage electrical system shall be free of defects in material and workmanship for a period of five (5) years or 60,000 miles (or 96,561 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

STRUCTURAL WARRANTY - TEN (10) YEARS

The body shall be free of structural or design failure or workmanship for a period of ten (10) years, or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

UNDERCOAT WARRANTY

The body undercoating shall have a warranty provided by the manufacturer for the lifetime of the vehicle or twenty (20) years, whichever occurs first. The warranty shall be transferable between vehicle owners. Should the undercoating material applied to the underside of the body and wheel wells of the vehicle ever flake off, peel, chip or crack due to drying out, the damaged area shall be re-sprayed without charge to the vehicle owner.

PAINT LIMITED WARRANTY - TEN (10) YEARS

The body shall be free of bubbling or peeling as a result of a defect in the method of manufacture for a period of ten (10) years or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date. **Pro-rated warranties will not be acceptable.**

GRAPHICS LIMITED WARRANTY

The 3M graphics installation shall be warranted for a period of two (2) years. The 3M materials installed on completed vehicle shall be warranted for seven (7) years. The 3M Diamond grade film (if specified) shall be warranted for ten (10) years.

CONSTRUCTION PERIOD

The completed vehicle shall be delivered within six hundred twenty (620) days after pre-construction meeting and receipt and approval of any signed change orders from Clemson Fire and EMS.

Contractor shall not be held liable for delays of chassis delivery due to accidents, strikes, floods or other events not subject to their control. Contractor shall provide written notice to Clemson Fire and EMS as to delays and to what extent these delays have in completing vehicle within the stated construction time period.

DEALER MAKE READY PERIOD

The completed vehicle shall be delivered after fourteen (14) days for dealer preparation after completed apparatus delivered to dealer location.

OVERALL HEIGHT REQUIREMENT

There is no overall height (OAH) restriction for this vehicle.

OVERALL LENGTH REQUIREMENT

There is no overall length (OAL) restriction for this vehicle.

ANGLE OF APPROACH

The angle of approach for this vehicle shall not be less than eight (8) degrees when it is loaded to the estimated in-service weight as specified by the current edition of NFPA 1901.

ANGLE OF DEPARTURE

The angle of departure for this vehicle shall not be less than eight (8) degrees when it is loaded to the estimated in-service weight as specified by the current edition of NFPA 1901.

Inspection Trips

SUPPLIED CAB CHASSIS SPECIFICATION

Sutphen Monarch 73"

CAB TO AXLE DIMENSION

Cab to axle to center of rear tandems will be 190.5".

CHASSIS MODIFICATIONS

LUBRICATION AND TIRE DATA PLATE

A permanent label in the driving compartment shall specify the quantity and type of the following fluids used in the vehicle and tire information:

- Engine oil
- Engine coolant
- Chassis transmission fluid
- Pump transmission lubrication fluid . . (if applicable)
- Pump priming system fluid, if applicable . . (if applicable)
- Drive axle(s) lubrication fluid
- Air conditioning refrigerant . . (if applicable)
- Air conditioning lubrication oil . . (if applicable)
- Power steering fluid
- Cab tilt mechanism fluid . . (if applicable)
- Transfer case fluid . . (if applicable)
- Equipment rack fluid (if applicable)
- CAFS air compressor system lubricant . . (if applicable)
- Generator system lubricant . . (if applicable)
- Front tire cold pressure
- Rear tire cold pressure
- Maximum tire speed ratings

VEHICLE DATA PLATE

A permanent label in the driving compartment which indicates the following:

- Filter part numbers for the;
 - Engine
 - Transmission
 - Air
 - Fuel
- Serial numbers for the;
 - Engine
 - Transmission
- Delivered Weights of the Front and Rear Axles
- Paint Brand and Code(s)
- Sales Order Number

OVERALL HEIGHT, LENGTH DATA PLATE (US)

The fire apparatus manufacturer shall permanently affix a high-visibility label in a location visible to the driver while seated.

The label shall show the height of the completed unequipped vehicle in feet and inches (meters), the length of the completed vehicle in feet and inches (meters to nearest 1/10th), and the GVWR in tons (metric tons).

Wording on the label shall indicate that; "The information shown was current when the apparatus was manufactured. If the overall height changes while the vehicle is in service, the fire department must revise that dimension on the plate".

PERSONNEL CAPACITY

A label that states the number of personnel the vehicle is designed to carry shall be located in an area visible to the driver.

SEAT BELT WARNING - FAMA06/07

A safety sign FAMA06 shall be visible from each seat that is not equipped with occupant restraint and therefore not intended to be occupied while the vehicle is in motion.

A safety sign FAMA07, which warns of the importance of seat belt use, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

EQUIPMENT MOUNTING FAMA10

A safety sign FAMA10, which warns of the need to secure items in the cab, shall be visible inside the cab.

FIRE SERVICE TIRES - FAMA12

A safety sign FAMA12, which warns of the special requirements for fire service-rated tires, shall be visible to the driver entering the cab of any apparatus so equipped.

HELMET WARNING - FAMA15

A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

CLIMBING METHOD - FAMA23

A safety sign FAMA23, which warns of the proper climbing method, shall be visible to personnel entering the cab and at each designated climbing location on the body.

REAR STEP CROSSWALK WARNING - FAMA24

A safety sign FAMA24, which warns personnel not to ride on the vehicle, shall be located at the rear step areas and at any cross walkways.

FINAL STAGE MANUFACTURER VEHICLE CERTIFICATION

A final stage manufacturer vehicle certification label shall be provided and installed in the driver cab door jamb area.

FRONT BUMPER

The front bumper shall be provided by the cab/chassis manufacturer.

BUMPER GRAVELSHIELD

The bumper extension gravel shield if specified shall be provided by the cab/chassis manufacturer.

AIR HORN(S)

Air horn(s) if specified shall be supplied and installed by the cab/chassis manufacturer.

FRONT TOW PROVISIONS

The front tow provisions if specified shall be supplied and installed by the cab/chassis manufacturer.

SIREN SPEAKER

The siren speaker(s) shall be supplied and installed by the cab/chassis manufacturer.

AIR INTAKE SYSTEM

An air filter shall be provided in the engine's air intake system by the customer cab/chassis manufacturer.

Air inlet restrictions shall not exceed the engine manufacturer's recommendations.

The air inlet shall be equipped with a means of separating water and burning embers from the air intake system.

This requirement shall be permitted to be achieved by either of the following methods:

1. Provision of a device such that burning particulate matter larger than 0.039 in. (1.0 mm) in diameter cannot reach the air filter element.
2. Provision of a multi screen ember separator capable of meeting the test requirements defined in the Parker Hannafin, Racor Division, publication LF 1093-90, *Ember Separation Test Procedure*, or an equivalent test.

EXHAUST

The existing exhaust tailpipe shall be extended to ahead of the rear axle on the curbside.

The exhaust piping and discharge outlet shall be located or shielded so as not to expose any portion of the apparatus or equipment to excessive heating.

Exhaust pipe discharge shall be directed away from any operator's position.

Where parts of the exhaust system are exposed so that they are likely to cause injury to operating personnel, protective guards shall be provided.

- The tail pipe(s) shall terminate in a standard straight cut pipe.
- The tail pipe(s) shall terminate parallel to rear axle and flush with body.

WARNING LIGHT: CHASSIS CAB

ZONE A - FRONT WARNING LIGHTS, UPPER

The light bar shall be supplied and installed by the cab/chassis manufacturer.

The lightbar(s) shall be separately controlled at switch panel in the cab.

ZONE A - FRONT WARNING LIGHTS, LOWER

The warning lights shall be supplied and installed by the cab/chassis manufacturer. They shall be Whelen lights to complete an NFPA compliant lower level warning light system.

The Lights shall be controlled at the Switch Panel in Cab.

ZONES B AND D - CAB INTERSECTOR LIGHT (CAB FRONT CORNERS)

The warning lights shall be supplied and installed by the cab/chassis manufacturer. They shall be Whelen lights to complete an NFPA compliant lower level warning light system.

The Lights shall be controlled at the Switch Panel in Cab.

SEAT BELT COLOR

Section 14.1.3.3 of the NFPA 1901 Standards, requires all seat belt webbing in cab to be bright red or bright orange in color, and the buckle portion of the seat belt shall be mounted on a rigid or semi rigid stalk such that the buckle remains positioned in an accessible location.

SEAT BELT WEB LENGTH - CUSTOM CAB

Sections 14.1.3.2 and 14.1.3.3 of the NFPA 1901 standards, require the effective seat belt web length for a Type 1 lap belt for pelvic restraint to be a minimum of 60", and a Type 2 pelvic and upper torso restraint-style seat belt assembly to be a minimum of 110".

The chassis seat belt web length as supplied by the custom chassis manufacturer shall be compliant to NFPA Standards 14.1.3.2 and 14.1.3.3.

SEAT BELT / VDR SYSTEM - CUSTOM CAB

The seat belt warning and vehicle data recorder systems shall be provided by the cab/chassis manufacturer.

TIRE PRESSURE VISUAL INDICATORS

Tire pressure visual indicators if specified shall be supplied by the cab and chassis manufacturer.

HELMET STORAGE

HELMET STORAGE, DRIVER POSITION

Helmet storage shall be the responsibility of Clemson Fire and EMS in specified cab area.

A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

HELMET STORAGE, OFFICER POSITION

Helmet storage shall be the responsibility of Clemson Fire and EMS in specified cab area.

A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

CAB PAINT

The finish paint and color as provided from the cab/chassis manufacturer shall be provided. Cab shall not be repainted.

(Note: Most departments do NOT find that the fleet paint finish from a commercial cab/chassis manufacturer is acceptable. The Body Builder will NOT be responsible for paint quality and finish issues.)

HUB AND NUT COVERS

If specified chassis supplied front and rear wheels hub caps and wheel nut covers shall be installed prior to delivery of completed unit.

MUDFLAPS

There shall be 1/4" rubber mudflaps with logo provided and installed behind rear axle tires to prevent throwing road debris and lower road spray.

AIR BRAKE SYSTEM QUICK BUILD-UP

The air brake quick build-up system shall be supplied from the cab/chassis manufacturer.

The quick buildup system shall provide sufficient air pressure so that the apparatus has no brake drag and is able to stop under the intended operating conditions following the 60-second buildup time.

CHASSIS AIR TANK DRAIN CABLES

The cab/chassis air brake system tank drains cables shall be extended to panel(s) located on forward streetside lower body or as per tank locations. Each air tank drain cable shall be extended/routed to the panel(s) through eyelets so as to prevent cables hanging or being exposed below the body.

Each pull ring/handle shall be properly labeled to identify each tank and include a black colored label bezel.

ROAD EMERGENCY SAFETY KIT

The DOT required reflective triangles, warning flares, and fire extinguisher shall be provided by cab and chassis supplier.

Front Cab Components: Not Provided

STREETSIDE FUEL FILL

There shall be one (1) fuel fill door located in the streetside exterior wheel well panel, behind the rear axle. The fill door shall be fabricated from brushed stainless steel. There shall be a permanent label with the text "DIESEL FUEL ONLY" located adjacent to the fuel fill access.

DEF FLUID FILL

The DEF fluid fill shall be as supplied by commercial cab/chassis manufacturer.

BODY DESIGN

The importance of public safety associated with emergency vehicles requires that the construction of this vehicle meet the following specifications. These specifications are written to establish the minimum level of quality and design. All Bidders shall be required to meet these minimum requirements.

It is the intent of these specifications to fully describe the requirements for a custom built emergency type vehicle. In order to extend the expected service life of this vehicle, the body module shall be removable from the chassis frame and be capable of being installed on a new chassis.

The sheet metal material requirements, including alloy and material thickness, throughout the specifications are considered to be a minimum. Since such materials are available to all Manufacturers, the material specifications shall be strictly adhered to.

The fabrication of the body shall be formed sheet metal. Formed components shall allow the Clemson Fire and EMS to have the body repaired locally in the case where any object has struck the body and caused damage. The use of proprietary extrusions will prevent the Clemson Fire and EMS from such repair and shall NOT be used. All fabricated body components to be cut by a laser or water-jet for superior cut edge quality.

Following construction of the subframe, which supports the apparatus body, the sheet metal portion of the body shall be built directly on the subframe. The joining of the subframe and body shall be of a welded integral construction.

The sheet metal fabrication of the body shall be performed using inert gas continuous feed welders only. The entire body shall be welded construction. The use of pop rivets in any portion of structural construction may allow premature failure of the body structure. Therefore, pop rivets shall NOT be used in the construction of the structural portions of the body. This includes side body sheets, inner panels of compartment doors, and any other structural portions of the body.

EXTERIOR ALUMINUM BODY

The fabrication of the body shall be constructed from aluminum 3003H-14 alloy smooth plate. This shall include compartment front panel, vertical side sheets, side upper rollover panels, rear panels and compartment door frames.

The body compartment floors and exterior panels shall be constructed with not less than 3/16" (.187) aluminum 3003H-14 smooth plate. Interior compartment dividing walls shall be constructed with not less than 1/8" (.125) aluminum 3003H-14 smooth plate. Lighter gauge sheet metal will not be acceptable in these areas.

The door side frame openings shall be formed "C" channel design. An electrical wiring conduit raceway running the full length of exterior compartments shall be provided. This raceway shall contain all 12 volt wiring running to the rear of the apparatus, permitting easy accessibility to wiring.

Individual compartment modules, with dead air space voids between compartments, shall not be an acceptable method of compartment construction.

The compartments shall be an integral part of the body construction. Compartment floors from front of body to ahead of rear axle, also from rear axle to rear of body shall be single one-piece sections. Compartment floors shall be preformed, then positioned in body and welded into final position.

Compartment floors shall have a "sweep-out" design with door opening threshold positioned lower than compartment floor, permitting easy cleaning of compartments. Angles, lips, or door moldings are not acceptable in the base of

compartment door opening. One-way rubber drain valves shall be provided in compartment floors so that a water hose may be used to flush-out compartment area.

All exterior seams in sheet metal below frame, and around the rear wheel well area shall be welded and caulked to resist moisture from entering the compartments. All other interior seams and corners shall be sealed with silicone based caulk prior to painting.

Only stainless steel bolts, nuts, sheet metal screws and/or aluminum screws shall be used in mounting exterior trim, hardware and equipment.

Exterior compartments shall have louvers in lower back wall of compartment for ventilation.

WALKWAY/ROOF COMPARTMENT SUPPORT

The upper body floor structure shall be integral with the body sheet metal construction and shall be an all welded assembly. Bolted or glued assemblies shall not be accepted, .
All seams in roof material shall be fully and continuously welded to resist entry of moisture.

There shall be a total of four (4) 2" x 2" x 1/4" 6061-T6 alloy aluminum "C" channels running the length of body, two (2) on each outboard side. These "C" channels shall be used for roof support and in addition shall be used for mounting of any specified reels. This open "C" channel design along with special reel mounting clips allows for a universal location of any specified reels within each compartment.

In between the two (2) center "C" channels running the length of body shall be 2" x 2" x 1/4" 6061-T6 alloy aluminum tubing running perpendicular to walkway and welded in place on approximate 16" centers to support roof and/or walkway structure specified. Spacing greater than 16" that can allow oil canning of walkway shall not be allowed, .

A 2" formed radius shall be provided along the body sides and utilized as a wiring trough. The use of aluminum extrusions in this area shall not be acceptable, .

BODY SUBFRAME

The chassis frame rails shall be fitted with 1/4" custom extruded UHMW polyethylene rail cap to isolate the body frame members from direct contact with chassis frame rails.

The body subframe shall be constructed from 6061T6 aluminum alloy tubing. Subframe shall consist of two (2) 2" x 6" x 1/4" aluminum tubes, the same width as the chassis frame rails, NO EXCEPTION. Welded to this tubing shall be cross members of 2" x 6" x 1/4" aluminum. These cross members shall extend the full width of the body to support the compartments. Cross members shall be located at front and rear of the body, below compartment divider walls, and in front and rear of wheel well opening. Additional aluminum cross members shall be located on 16" centers, or as necessary to support walkway or heavy equipment.

To form the frame, the tubing shall be beveled and welded at each joint using 5356 aluminum alloy welding wire.

BODY MOUNTING

The body subframe shall be fastened to the chassis frame with six (6) spring loaded body mounts. Each mount shall be configured using a two-piece encapsulated slide bracket. The two (2) brackets shall be fabricated of heavy duty 1/4" thick steel and shall have a powder coat finish to resist any corrosion. Each mounting assembly shall utilize two (2) 3/4" diameter x 6" long grade 8 bolts and two (2) heavy duty springs. The assembly design shall allow the body and subframe

to act as one (1) component, separate from the chassis. As the chassis frame twists under driving conditions, the spring mounting system shall eliminate any stress from being transferred into the body. The spring loaded body mounts shall also prevent frame side rail or body damage caused by unevenly distributed stress and strains due to load and chassis movement.

Body mountings that do not allow relief from chassis movement will not be acceptable.

10" REAR STEP BUMPER

The full width rear bumper shall be constructed from 2" x 2" x 1/4" aluminum tubing frame and covered with 3/16" NFPA compliant aluminum tread plate. The bumper shall extend from the rear vertical body panel 10" and provide a rear step with a minimum of 1/2" space at body for water drainage.

REAR TOW EYES

There shall be two (2) heavy duty rear mounted tow eyes securely attached to the body subframe, below body. The tow eyes shall be fabricated from 3/4" thick steel plate with a 3" diameter opening. Tow eyes shall have a black powder coat finish.

TRAILER HITCH

A 2" square Class III weight carrying capacity rear hitch receiver shall be provided below the rear bumper. The receiver shall be attached to body sub-frame with a black hammertone powder coat paint finish.

A label shall be provided in a location in which it is visible to an operator making trailer connections. The label shall state the maximum GVWR and tongue weight of the trailer that can be safely towed with the hitch system.

Two (2) safety chain attachment points shall be provided near the hitch point for hitches designed to use safety chains, each designed with an ultimate strength of not less than the maximum GVWR specified on label.

Without the use of a "weight distribution" ball hitch the Class III receiver shall have a GTW capacity of 8,000 lbs. and a maximum tongue weight of 800 lbs. With the use of a "weight distribution" ball hitch the Class III receiver shall have a GTW capacity of up to 12,000 lbs. and a maximum tongue weight of 1,200 lbs.

TRAILER ELECTRICAL RECEPTACLE

For hydraulic brake equipped or electric brake equipped trailer towing capability, a primary electrical receptacle shall be provided near the hitch point and shall match the umbilical cable specified. Receptacle shall be a 7-Way Blade Type socket, the same as used on most Light Duty Trucks and RV's.

TRAILER AUXILIARY ELECTRICAL RECEPTACLE

An auxiliary electrical receptacle shall be provided near the hitch point and shall match the umbilical cable specified for optical warning lights. Receptacle shall be a 7-Way Pin Type Socket, ISO3731 compliant with a reverse ground terminal.

RECEIVER WITH TRAILER BALL

No hitch receiver with trailer ball will be provided with completed unit.

GROUND LIGHTS

There shall be two (2) OnScene 10" Access Pro white LED lights installed below bumper capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting shall be switchable but activated automatically when the vehicle park brake is set.

WHEEL WELL EXTERIOR PANEL

The exterior panel of the body wheel well enclosure shall be constructed from 3/16" smooth aluminum panels.

STAINLESS STEEL BODY FENDERETTES

The body wheel well openings shall be provided with round radius, polished stainless steel fenderettes. The fenderettes shall be bolted and easily replaceable if damaged. The fenderettes shall be installed using nylon washers to space them slightly away from the body to reduce buildup of moisture and/or debris.

WHEEL WELL LINERS

The wheel wells shall be provided with an easily removable polymer, circular inner fender liner. The inner liner shall be bolted to the wheel well with stainless steel bolts and spaced away from the wheel well so the liner will not accumulate dirt or water.

SCBA CYLINDER COMPARTMENTS

There shall be seven (7) SCBA cylinder storage compartments located, four (4) on curbside, and three (3) on streetside of rear tandem wheel well area. Each compartment shall have a brushed stainless door assembly with a positive catch latch. Each compartment shall have a 8" diameter tube behind the wheel well panel, attached to the door assembly. Each compartment shall allow the storage of an SCBA cylinder or a fire extinguisher up to 7-3/4" in diameter x 22" deep. The door shall activate the "Hazard Warning Light" in the cab when not in the closed position.

BODY PAINT SPECIFICATIONS

BODY PAINT PREPARATION

After the body and components have been fabricated they shall be disassembled so when vehicle is complete there shall be finish paint beneath the removable components. The body shall be removed from chassis during the paint process to insure proper paint coverage. The body and components shall be metal finished as follows to provide a superior substrate for painting.

The exterior (and interior, if painted) body shall undergo a thorough cleaning process starting with a biodegradable phosphoric acid solution to begin the etching process followed by a complete clear water rinse. The next step shall consist of a chemical conversion coating applied to seal the metal substrate and become part of the metal surface for greater film adhesion.

All bright metal fittings, if unavailable in stainless steel or polished aluminum, shall be chrome plated. Iron fittings shall be copper under plated prior to chrome plating.

PAINT PROCESS

The paint process shall follow the strict standards set forth by PPG Industries guidelines. Painters applying PPG products will be PPG Certified Commercial Technicians, and re-certified every two (2) years. The body shall go through the following paint process;

- 1) Clean bare metal with a wax and grease remover using low lint rags.
- 2) Inspect, straighten, and hammer high points, grind all seams, sharp edges, and welds. DA sand entire paintable surfaces using 24-180 grit dry paper. Plastic fill all low spots and DA sand fill areas using 36-180 grit dry paper. Apply pinhole filler and DA sand areas using 80-180 grit dry paper.
- 3) Re-clean bare metal using a wax and grease remover and low lint rags.
- 4) Within 24 hours, a PPG Delfleet® epoxy color primer with proper hardener for corrosion resistance using a pressure pot spray gun and applying 2-5 full wet coats or 1.5-8.0 dry mils max. achieving full hiding and allow to air dry 60 minutes @ 70°F or bake for 45 minutes @ 140°F degree.
- 5) Inspect, putty fill, and dry guild coat entire body surface and DA sand using 180-400 grit dry paper.
- 6) Re-clean bare metal using a wax and grease remover using low lint rags.
- 7) A PPG Delfleet® primer sealer with proper hardener and thinner shall be sprayed using a pressure pot spray gun and applying 1 full wet coat or 1.0-2.0 dry mils achieving full hiding and allow to flash off in spray booth for minimum of 60 minutes @ 70°F.
- 8) A PPG Delfleet® FBCH basecoat (color) with proper hardener and dry additive shall then be sprayed using a pressure pot set @ 45-60 PSI and achieving full hiding or 1.5-2.0 wet mils and allow to flash off in spray booth 45-60 minutes before applying clearcoat.
- 9) A PPG Delfleet® clearcoat with proper hardener and thinner shall be sprayed using a pressure pot spray gun and applying 2-3 full wet coats or 5.0 wet mils for a uniform gloss and allow to flash off in spray booth 10 minutes and bake for 120-140 minutes @ 125°F (surface temp.).
- 10) After cooling, DA sand heavy orange peel or runs using 1000 grit dry sand paper and final DA sand using 1500-2000 grit dry sand paper. Wipe off all surfaces to remove dust and debris. Buff unit as needed using 3M rubbing compound and a white wool pad and inspect until all sand scratches are removed.
- 11) Polish as needed using 3M Perfect-It-Polish and a black foam pad, repeat as necessary and inspect until all sand scratches are removed.

PAINT - ENVIRONMENTAL IMPACT

The contractor shall meet or exceed their current State regulations concerning paint operations pollution control and shall include measures to protect the atmosphere, water and soil. PPG Delfleet® Evolution paint shall be free of all heavy metal (lead & chromate) components. Paint emissions from sanding and painting shall be filtered and collected. All paint wastes shall be disposed of in an environmentally safe manner. Solvents used in cleanup operations shall be collected, sent off-site for distillation and returned for reuse.

FASTENERS

Prior to the assembly and reinstallation of exterior components; i.e. warning and DOT lights, handrails, steps, door hardware, and miscellaneous items, a Mylar isolation tape, or gasket shall be used to prevent damage to the finish painted surface. These components shall be fastened to body using either a plastic insert into body metal with stainless steel screws or zinc coated nut-surts into body surface using stainless steel bolts to resist corrosion from dissimilar metals.

ELECTROLYSIS CORROSION CONTROL

The vehicle shall be assembled using ECK brand or similar corrosion control compound on all high corrosion potential areas.

ECK protects aluminum and stainless steel against electrolytic reaction, isolates dissimilar metals and gives bedding protection for hardware and fasteners. ECK contains anti-seizing lubricant for threads. ECK is dielectric and perfect for use with electrical connectors.

PAINT FINISH - TWO COLOR

The body shall be painted with a two-tone color of PPG Delfleet® Evolution paint per approved customer spray-out. The two-tone paint break line will be at upper body drip rail location unless an alternate location is approved at the pre-construction meeting.

- Paint Color: Match cab/chassis supplied paint color.

METALLIC PAINT UPGRADE

The paint color specified is a metallic based paint.

BODY UNDERCOATING

The entire underside of body shall be sprayed with black automotive undercoating. Undercoating shall cover all areas underside of body and wheel well area to help resist corrosion under the vehicle.

COMPARTMENT INTERIOR FINISH

The interior of all exterior body compartments shall be a "Maintenance Free" smooth unpainted finish. All body seams shall be finished with a caulk sealant for both appearance and moisture protection.

REFLECTIVE STRIPE REQUIREMENTS

Material

All retroreflective materials shall conform to the requirements of ASTM D4956, *Standard Specification for Retroreflective Sheeting for Traffic Control*, Section 6.1.1 for Type I Sheeting.

All retroreflective materials used that are colors not listed in ASTM D4956, Section 6.1.1, shall have a minimum coefficient of retro-reflection of 10 with observation angle of 0.2 degrees and entrance angle of -4 degrees.

Any printed or processed retroreflective film construction used shall conform to the standards required of an integral colored film as specified in ASTM D4956, Section 6.1.1.

Minimum Requirements

A retroreflective stripe(s) shall be affixed to at least 50 percent of the cab and body length on each side, excluding the pump panel areas, and at least 25 percent of the width of the front of the vehicle, not including mirrors or other protrusions.

The stripe or combination of stripes shall be a minimum of 4 in. (100 mm) in total width.

The 4 in. (100 mm) wide stripe or combination of stripes shall be permitted to be interrupted by objects (i.e., receptacles, cracks between slats in roll up doors) provided the full stripe is seen as conspicuous when approaching the apparatus.

A graphic design shall be permitted to replace all or part of the required striping material if the design or combination thereof covers at least the same perimeter length(s).

GRAPHICS PROOF Will Match Signed Approval

A color graphics proof of the reflective striping layout shall be provided for approval by Clemson Fire and EMS prior to installation. The graphics proof shall be submitted to Clemson Fire and EMS on 8.5" x 11" sheets with front, sides, rear and plan views, each on one (1) sheet. In addition if there is any special art work an additional sheet shall be provided showing all details. **Note:** The graphics color proof may not reflect the correct paint break lines on the chassis and body please refer to the paint section of your specifications for correct paint break lines.

CHEVRON REFLECTIVE STRIPE - REAR SIDES PANELS

At least 50 percent of the rear-facing vertical surfaces, visible from the rear of the apparatus, excluding any pump panel areas not covered by a door, shall be equipped with retroreflective striping in a chevron pattern sloping downward and away from the centerline of the vehicle at an angle of 45 degrees. Each stripe shall be 6" width.

The rear side panels of the body on each side of a rear stairway or compartment shall have a chevron style reflective stripe, extending from bumper height up to side compartment drip rail height. Each chevron panel shall be a full sheet and shall have a 3M UV over laminate to protect from UV rays, scene damage, and everyday use.

The stripe material shall be 3M Diamond Grade.

This reflective chevron stripe shall alternate red and fluorescent yellow-green in color.

Sutphen Manufacturer Badge

EXTERIOR COMPARTMENT DOORS

ROLL-UP DOOR CONSTRUCTION - AMDOR

The apparatus shall be equipped with Amdor brand exterior roll-up compartment doors. Amdor roll-up doors shall be complete with the following features;

- 1" aluminum double wall slats with continuous ball & socket hinge joint and recessed dual durometer slat seal
- Double wall reinforced bottom panel with stainless steel lift bar latching system
- Bottom panel flange with cut-outs for ease of access with gloved hands
- Reusable slat shoes with positive snap-in securement
- Smooth interior door curtain to prevent equipment hang-ups
- One-piece aluminum door track / side frame, top gutter with non-marring seal
- Non-marring recessed side seals with UV stabilizers to prevent warping
- Dual leg bottom seal, with all wear component material to be Type 6 Nylon
- The door shall be warranted for a period of 36 months from the date of delivery. AMDOR Inc. liability covers the replacement or repair of any component that fails due to defects in material and / or workmanship during the coverage period.

Each shutter door shall decrease the compartment door frame opening approximately 2.00" in width and approximately 5.50" in height for the bottom section of door assembly.

The specified retroreflective stripe material shall be applied on the roll-up compartment doors. The stripe shall be precision machine cut for each door slat of the roll-up doors. Under no circumstance will the stripe material be cut on roll-up door surface.

BODY HEIGHT MEASUREMENTS

The vertical body dimensions shall be as follows:

AHEAD OF REAR AXLE

	<u>Description</u>	<u>Dimension</u>
A	Bottom of Subframe to Top of Body	83.7"
B	Bottom of Subframe to Bottom of Body	22.5"
C	Total Body Height	106.2"
D	Compartment Height Above Frame	48.0"
E	Compartment Height Below Frame	25.0"
F	Vertical Door Opening:	
	-with roll-up door	65.0"
	-with hinged door	68.5"

ABOVE REAR AXLE

	<u>Description</u>	<u>Dimension</u>
G	Vertical Door Opening - Above Rear Wheel	
	-with roll-up door	34.0"
	-with hinged door	37.5"

BEHIND REAR AXLE

	<u>Description</u>	<u>Dimension</u>
H	Bottom of Subframe to Bottom of Body	20.0"
I	Compartment Height Above Frame	48.0"

J	Compartment Height Below Frame	22.5"
K	Vertical Door Opening:	
	-with roll-up door	62.0"
	-with hinged door	65.5"

GENERAL

	<u>Description</u>	<u>Dimension</u>
L	Top of Body to Bottom of Drip Rail	33.5"

(Dimensions are approximate and subject to change during construction or design process.)

SIX (6) UPPER BODY COMPARTMENTS (OPEN)

There shall be six (6) compartments parallel to the sides of the body, three (3) on each side. Each of these compartments shall be approximately 83" long x 28.0" wide x 28.5" deep. The side compartments shall be open under each door sill to allow for long equipment. Each compartment shall be integral with the body construction, and will not be bolted or add-on modules. The outside walls of each compartment will be double walled to prevent equipment from denting the outside painted surface.

Each compartment shall have a lift-up type compartment door hinged on the outboard side. Each door shall be fabricated from 3/16" aluminum tread plate. Each door shall have two (2) pneumatic type cylinders, one (1) at each end, attached to cast aluminum brackets mounted to the interior surface of the door to hold the door in both the opened and closed positions. Each door shall be mounted using multiple 16" long, equally spaced, 14 gauge stainless steel hinges, with 1/4" stainless steel pin. A polyester barrier film gasket shall be placed between stainless steel hinge and the body mounting surface as necessary to resist corrosion caused by dissimilar metals.

Each compartment door shall overlap a 2" vertical lip on the body roof to resist entry of moisture and sealed with automotive type rubber molding to provide a weather resistant seal.

Each roof compartment door shall have a chrome 7" handle bolted to center of each door.

Each compartment shall have a 13/16" drain hole located in floor of compartment with a 1" flexible drain tube that terminates below body.

NFPA door ajar system shall be automatically activated by an individual switch per compartment.

- Six (6) OnScene Access PRO white LED, full height compartment light(s), horizontally mounted.

UPPER BODY COMPARTMENT EQUIPMENT

The specified upper body compartments shall be provided with the following equipment;

- Air storage consisting of four (4) UN/ISO DOT, 510 SCF @ 6,000 PSI, (requires hydraulic pressure or ultrasonic examination test every 10 years) shall be provided on completed vehicle complete with gauges and valves. Each cylinder shall measure 9.4" diameter x 52" long, and weigh 202 lbs.

A label shall be placed on or near the operator's panel that provides the following:

- 1) The original cylinder test date stamped on the cylinders.
- 2) The recommended testing interval.
- 3) Five additional open spaces, appropriately labeled, for the user to enter actual retesting dates.

The manufacturer's test date (month and year) on each air tank shall be current within 12 months of the apparatus delivery date.

Air tanks shall be marked with a label that reads;

"High Pressure 6,000 PSI Breathing Air" or "High Pressure 41,368 kPa Breathing Air."

High pressure air hose and couplings are to have a pressure rating equal to or greater than the highest pressure expected to be encountered, with a safety factor of 4 to 1.

- There will be a welded reinforcement above the body frame to carry specified DOT or ASME cylinders. The mounting of the cylinders will be with adjustable track and powder coated steel band straps to securely hold all cylinders in place.

DOT cylinders will be located two (2) on each side coffin compartment and covered with a removable false floor.

UPPER BODY WALKWAY

A 34" wide, upper body walkway shall be provided at the center of body and recessed into the roof structure. The walkway shall be fabricated from NFPA compliant 3/16" aluminum tread plate with continuously welded cross seams to resist moisture penetration into apparatus body, No Exceptions. The walkway shall be supported with 2" x 2" tubing on 14" - 22" centers.

13/16" drains shall be installed at front of walkway connected to 1" flexible drain tubes that will terminate below the body.

WALKWAY/STEP LIGHTS

There shall be four (4) OnScene Solutions Rough-Service 9" LED lights provided to illuminate the walkway or step area.

Each light shall be mounted in an extruded aluminum housing to protect against damage from personnel or equipment.

Lighting shall provide illumination at a minimum level of 2 fc (20 lx) on all work surfaces, steps, and walkways. Lighting shall be switchable but activated automatically when the vehicle park brake is set.

WALKWAY SAFETY DELINEATION

For increased visibility and safety, the front edge of walkway at top of stairway shall have two (2) rows of fluorescent yellow-green reflective squares provided between the diamond pattern of stepping surface to delineate stair tread edge.

ROOF ACCESS STAIRWAY

The rear of the body shall be provided with a minimum 34" wide roof access stairway recessed into the side rear compartments. Stairs treads shall be 9 1/2" minimum depth and formed from 3/16" NFPA compliant aluminum tread plate with uniformed riser height design. Stair treads will be continuously welded into side walls. Bolt-in tread design will not be acceptable.

Roll-out ladder design requiring set-up time and 8 plus feet behind apparatus or vertical ladders that do not allow firefighter to safely ascend or descend with equipment will not be acceptable.

STAIRWAY HANDRAILS

There shall be two (2) handrails provided, one (1) on each side wall of recessed center stairway providing three-points of contact at all times for safer access to roof compartments. The handrails shall be angled for optimum use during ingress or egress of the upper walkway area.

Handrails shall be NFPA compliant 1-1/4" knurled 304 stainless steel with welded end stanchions.

WALKWAY/STEP LIGHTS

There shall be two (2) OnScene Solutions Rough-Service 9" LED lights provided to illuminate the walkway or step area.

Each light shall be mounted in an extruded aluminum housing to protect against damage from personnel or equipment.

Lighting shall provide illumination at a minimum level of 2 fc (20 lx) on all work surfaces, steps, and walkways. Lighting shall be switchable but activated automatically when the vehicle park brake is set.

STEP COMPARTMENT - LOWER 2 STEPS

There shall be one (1) compartment located in the roof access stairway area below frame level. The compartment will cover the bottom two (2) steps and have a hinged lift-up 3/16" NFPA compliant aluminum tread plate step door. The compartment shall be manufactured to resist road debris, dirt and moisture from entering. The compartment shall be 33" wide x 24" high x maximum depth based on chassis mounted components and requirements for structural integrity of the body.

The compartment shall have an LED light that shall automatically activate when the door is opened and wired to the NFPA required hazard warning light provided in the cab.

This will house customer supplied and installed Portable Winch.

- The hinged door(s) shall have a stainless steel 6" offset bent D-ring locking handle. A gasket shall be placed between handle and door. Door latch shall be a single point latch flush mounted to exterior door panel.
- One (1) OnScene Access PRO white LED light(s) mounted in cabinet(s).

STEP COMPARTMENT - UPPER

There shall be one (1) upper compartment located directly below walkway area. The compartment shall have a horizontally hinged brushed stainless steel door. The compartment shall be manufactured to resist road debris, dirt and moisture from entering. The compartment shall be approximately 26" wide x 8" high x maximum depth available.

Each Compartment shall have an OnScene LED light that shall be automatically activated when the door is opened and wired to the NFPA required hazard warning light provided in the cab.

Devices to secure specified equipment, compartment dividers, or UHMW plastic angles, or sheeting will be used for storage of specified equipment as required to prevent damage to equipment.

- The hinged door(s) shall have a stainless steel 6" offset bent D-ring locking handle. A gasket shall be placed between handle and door. Door latch shall be a single point latch flush mounted to exterior door panel.
- One (1) OnScene Access PRO white LED light(s) mounted in cabinet(s).
- Storage for One (1) 24' 2-section ladder(s). Manufacturer, model number of the ladder(s) shall be provided in equipment section of specification.
- Storage for One (1) 14' roof ladder(s). Manufacturer, model number of the ladder shall be provided in equipment section of specification.
- Storage for One (1) 10' folding ladder(s). Manufacturer, model number of the ladder shall be provided in equipment section of specification, or at pre-construction meeting when provided by Clemson Fire and EMS.

FOLD-DOWN STEP

There shall be one (1) 30" wide fold-down step located at the bottom of the roof access stairway to reduce the distance from the ground to the first step. The step surface shall be NFPA compliant aluminum treadplate. The step shall manually fold up into the stairway with an over-center gas shock to hold step in position during travel. The step shall activate the "Hazard Warning Light" in the cab when not in the stowed position.

REAR BODY HANDRAILS

There shall be two (2) Hansen International 24" x 1-1/8" vertical handrails on rear body. Handrails shall be NFPA compliant formed from anodized aluminum with knurled anti-slip finish.

Each handrail shall be back-lit with a Safetylite, 12 VDC white LED light tube. Lights shall be activated with headlight and park brake set circuits.

A safety sign FAMA23, which warns of the proper climbing method, shall be visible to personnel entering the cab and at each designated climbing location on the body.

A safety sign FAMA24, which warns personnel not to ride on the vehicle, shall be located at the rear step areas and at any cross walkways.

BODY WIDTH DIMENSIONS

The body shall be 100.0" wide, and 102.0" wide at drip rails. Interior compartment depth dimensions shall be approximately:

<u>Area Description</u>	<u>Dimension</u>
Transverse above subframe	95.0"
Compartment depth below subframe	24.5"

STREETSIDE COMPARTMENT - FRONT (S1)

The interior useable compartment width shall be approximately 64.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 58.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.

The following components shall be located above frame level:

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.

The following components shall be located at base of lower compartment:

- The 12 volt electrical distribution panel shall be located in the front lower compartment.
- There shall be two (2) OnScene Solutions 83 series aluminum tray base with 70% extension, and rating of 1,000 lbs. Slide-out tray(s) base shall be full width (street/curb) and as wide as the compartment layout or door opening permits, capable of extending out either side of the body located above the level of the chassis frame rails. Each slide base shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will lock the tray in the closed, 40% extended and 70% extended positions.

- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 ½".
 - The above component(s) shall have a smooth un-painted finish.
 - Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
 - The vertical divider in the second of the above tray(s) shall have the following mounting on the following side.
 - Front side.
 - Rear side.
 - Any equipment mounting on transverse tray shall be provided by Clemson Fire and EMS after delivery.
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.
- There shall be one (1) Blue Sea Systems ST series blade type fuse block(s) with screw type terminals for both positive and negative buss with cover provided for distribution of up to twelve (12) 30 amp, 12 VDC circuits.
- The fuse block shall be protected by a 60 amp maxi fuse located at the source.
- Fuse block shall be wired battery direct.
- Fuse block shall be located in the top left **(forward wall) upper middle.**
- The controls for the specified light tower(s).

STREETSIDE COMPARTMENT - AHEAD OF REAR WHEELS (S2)

The interior useable compartment width shall be approximately 64.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 58.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT


- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.

The following components shall be located above frame level:

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be two (2) adjustable shelf/shelves approximately 30" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges.
 - Any equipment mounting on adjustable shelf shall be provided by Clemson Fire and EMS after delivery.
 - The above component(s) shall have a smooth un-painted finish.
- There shall be two (2) removable plastic equipment box(s) with hand holes for carrying. Each box shall be fabricated from ½" (.50) textured finish polypropylene sheet. Each box shall be Add Dimensions.

Boxes shall be 11"w x 11"t x 22.5"d

- One (1) C-Tech drawer cabinet shall be provided, orange in color, four (4) drawers.

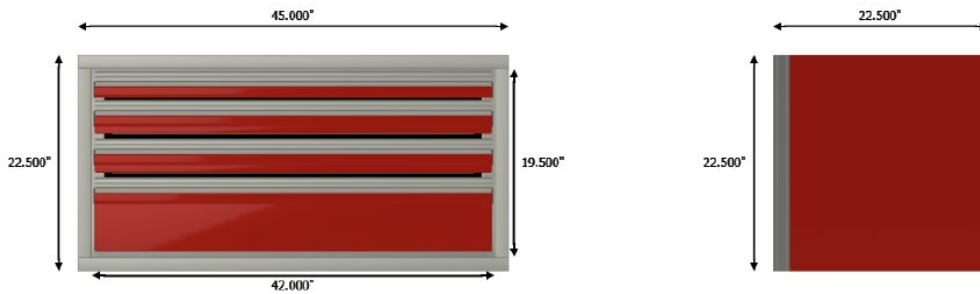

The cabinet shall be **Orange** in color.

- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.
- There shall be one (1) Blue Sea Systems ST series blade type fuse block(s) with screw type terminals for both positive and negative buss with cover provided for distribution of up to twelve (12) 30 amp, 12 VDC circuits.
- The fuse block shall be protected by a 60 amp maxi fuse located at the source.
- Fuse block shall be wired battery direct.
- Fuse block shall be located in the top left **(forward wall) upper middle.**

STREETSIDE COMPARTMENT - ABOVE REAR WHEELS (S3)

The interior useable compartment width shall be approximately 56.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 50.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

The following components shall be located above frame level:

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 84 series slide-out, drop-down style aluminum tray base with 90% extension, and rating of 150 lbs. Slide-out tray(s) base shall be approximately 45" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will hold the tray in the closed position.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 1/2".
 - The above component(s) shall have a smooth un-painted finish.
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.

STREETSIDE COMPARTMENT - ABOVE REAR WHEELS (S4)

The interior useable compartment width shall be approximately 56.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 50.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

The following components shall be located above frame level:

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 84 series slide-out, drop-down style aluminum tray base with 90% extension, and rating of 150 lbs. Slide-out tray(s) base shall be approximately 45" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will hold the tray in the closed position.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 1/2".
 - The above component(s) shall have a smooth un-painted finish.
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.

STREETSIDE COMPARTMENT - REAR (S5)

The interior useable compartment space shall be approximately 70.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 64.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

The following components shall be located above frame level:

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.

The following components shall be located at frame level:

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- There shall be one (1) OnScene Solutions 81 series aluminum tray base with rating of 750 lbs. Slide-out tray(s) base shall be approximately 70" deep and as wide as the compartment layout or door opening permits located above the body subframe and shall be vertically adjustable in height. Slide base shall extend depth specified, less 4". Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will lock the tray in the closed and full extension positions.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 1/2".

- The above component(s) shall have a smooth un-painted finish.
- Any equipment mounting on slide tray shall be provided by Clemson Fire and EMS after delivery.
- There shall be one (1) OnScene Solutions 84 series slide-out, drop-down style aluminum tray base with 90% extension, and rating of 150 lbs. Slide-out tray(s) base shall be approximately 30" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and shall be vertically adjustable in height. Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will hold the tray in the closed position.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 1/2".
 - The above component(s) shall have a smooth un-painted finish.
 - Any equipment mounting on slide tray shall be provided by Clemson Fire and EMS after delivery.
- The compartment floor shall be provided with angle or sloped panel towards back wall of compartment to assist in holding equipment within compartment.
- Cargo netting of 1" - 2" nylon webbing to help restrain equipment in lower compartment area.
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.
- There shall be one (1) Blue Sea Systems ST series blade type fuse block(s) with screw type terminals for both positive and negative buss with cover provided for distribution of up to twelve (12) 30 amp, 12 VDC circuits.
- The fuse block shall be protected by a 60 amp maxi fuse located at the source.
- Fuse block shall be wired battery direct.
- Fuse block shall be located in the top left **(Forward wall) upper middle.**

CURBSIDE COMPARTMENT - FRONT (C1)

The interior useable compartment width shall be approximately 64.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 58.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.

The following components shall be located above frame level:

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be two (2) OnScene Solutions 83 series aluminum tray base with 70% extension, and rating of 1,000 lbs. Slide-out tray(s) base shall be approximately 94" deep; capable of extending out either side of the body located above the level of the chassis frame rails. (Specified in opposite side compartment.)
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.

CURBSIDE COMPARTMENT - AHEAD OF REAR WHEEL (C2)

The interior useable compartment width shall be approximately 64.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 58.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.

The following components shall be located above frame level:

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 85 series aluminum slide-out vertical tool board(s) with 100% extension, and rating of 1,000 lbs. approximately 70" deep. Each tool board shall be mounted on an OnScene Solutions slide frame constructed of anodized aluminum extrusion(s). Each slide shall have a cable operated, spring loaded latch complimented by a red "T" handle (Pull to Release) left side latch on slide base. The slide shall lock in the closed and full extension positions.
 - The vertical tool board material shall be 3/16" (.188) 3003H-14 aluminum alloy sheet.
 - The above component(s) shall have a smooth un-painted finish.

- Front side.

- There shall be four (4) Ziamatic Spring Clip series walkaway type SCBA air pack bracket(s) mounted on specified tool board with following options;
- Short footplate model #NSF.
- Four (4) High Cycle 6" spring clip(s) model H-6 with black base coating and yellow non-mar double coating tips for 6.1"-6.9" diameter cylinders.

- Rear side.

- Each tool board will be bolted to compartment floor.
- There shall be one (1) vertical compartment partition(s) provided dividing the compartment into fore and aft sides. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet. Partition shall be approximately Fill In from forward wall of compartment.
 - Partition shall be bolted in position at base and top of partition.
 - The above component(s) shall have a smooth un-painted finish.
- There shall be one (1) module fabricated from 3/16" (.188) 3003H-14 aluminum alloy smooth sheet. The module will be designed for the following long tools and equipment:
 - One (1) Clemson Fire and EMS supplied ladder(s) shall be installed after delivery.

Will house a Little Giant Defender 1A 17

- There shall be one (1) OnScene Solutions Velcro cargo straps provided to secure the stored equipment.
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.

CURBSIDE COMPARTMENT - ABOVE REAR WHEEL (C3)

The interior useable compartment width shall be approximately 56.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 50.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

The following components shall be located above frame level:

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 84 series slide-out, drop-down style aluminum tray base with 90% extension, and rating of 150 lbs. Slide-out tray(s) base shall be approximately 45" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and shall be vertically adjustable in height. Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will hold the tray in the closed position.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 1/2".
 - The above component(s) shall have a smooth un-painted finish.
 - Any equipment mounting on slide tray shall be provided by Clemson Fire and EMS after delivery.

- There shall be one (1) storage module(s) for air bags. The module shall be fabricated from 1/8" (.125) 3003H-14 aluminum alloy sheet. Circular notches shall be provided along the front edge to ease the access to the air bags. Each bay shall be sized to hold the air bag and a matching piece of 1/2" plywood (plywood not provided).

Module shall be designed to store the following air bags;

Air Bag

<u>Vetter</u>	<u>Paratech</u>
2- V25 24in x 20in	1- KPI-32 25in x 24in
2- V24 25in x 20.5in	1- KPI-28 27in x 20in
2- V12 21.5in x 13in	1- KPI-17 22in x 15in
2- V12 16in x 15in	Thickness: 1.25in
1- V4 12in x 8in	
1- V3 11in x 8in	
Thickness: 1in	

- There shall be four (4) OnScene Solutions Velcro cargo straps provided to secure the stored equipment.
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.

CURBSIDE COMPARTMENT - ABOVE REAR WHEEL (C4)

The interior useable compartment width shall be approximately 56.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 50.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

The following components shall be located above frame level:

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 84 series slide-out, drop-down style aluminum tray base with 90% extension, and rating of 150 lbs. Slide-out tray(s) base shall be approximately 45" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and shall be vertically adjustable in height. Each slide shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will hold the tray in the closed position.
- Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray with an internal depth of approximately 3 1/2".
 - The above component(s) shall have a smooth un-painted finish.
 - Any equipment mounting on slide tray shall be provided by Clemson Fire and EMS after delivery.

- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.

CURBSIDE COMPARTMENT - REAR (C5)

The interior useable compartment space shall be approximately 70.5" wide.

- This compartment shall have an Amdor roll-up door.
- The compartment door opening shall be approximately 64.0" wide.
- The roll-up door slats and the door track components shall be painted to match the single tone exterior color. The painted roll-up doors shall be equipped with Extended Slat Shoe (ESS) feature which eliminates abrasion on the door finish.
- The Amdor door shall be equipped with an integral switch in the lower door handle retainer block to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

COMPARTMENT LAYOUT

The following components shall be located above frame level:

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.

The following components shall be located at frame level:

- The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
- A clay absorbent (or similar weight material) storage hopper shall be provided in this compartment for approximately 150 pounds of material. The storage hopper shall be filled from an upper body compartment and funneled to a manual slide knife valve with flexible hose provided on bottom of hopper storage. The bottom of absorbent hopper and valve shall be spaced off floor to allow for a 5 gallon pail to be stored under valve.
- There shall be two (2) adjustable shelf/shelves approximately 30" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges.

- Any equipment mounting on adjustable shelf shall be provided by Clemson Fire and EMS after delivery.
- The above component(s) shall have a smooth un-painted finish.
- Partition shall be bolted in position at base and top of partition.
- Two (2) OnScene Access PRO white LED, full height compartment lights, vertically mounted.

HP Air Storage: Coffins

- One (1) Resolve Specialty Space Saver model 100A vertical mobile filling station(s) designed for SCBA and SCUBA cylinders shall be provided. Fill station shall be capable of simultaneously filling (2) cylinders, with door safety interlocks. The fill enclosure shall meet NFPA 1900 testing certification, and shall be approx. 42.50" high (53" high with door open) x 13.00" wide x 23.00" deep and weigh 405 lbs. If a cascade air fill control panel is provided it will attach to either side of fill station or remotely.

High pressure air hose and couplings are to have a pressure rating equal to or greater than the highest pressure expected to be encountered, with a safety factor of 4 to 1.

- The Resolve Space Saver fill station shall be provided with a four (4) bank, manual control cascade air fill control panel with black non-glare control panel. Panel is designed with embedded color graphics to help assure proper operation in the field. All gauges are premium glycerin filled which have a 1.5% accuracy rating. Panel includes; safety gauges, charge and bleed valves and pressure regulator for automatic SCBA filling. The panel housing swings open from the front to allow for easy access to gauges and valves in the event service is needed. A refill port for re-filling air storage with female fitting S252P with S44-2 dust cap is provided on front of panel. Panel shall be 42.50" x 9.75" x 18.00".
 - The fill station fill whip(s) shall terminate in a high pressure CGA-347 threaded connectors for 4,500 - 5,500 PSI air pack cylinders.
- There shall be a 25' 7000psi refill hose supplied with the apparatus for connection between a station/facility compressor and the fill station/storage refill port.

ROOF ACCESS STAIRWAY

The rear of the body shall be provided with a recessed center stairway in lieu of a compartment.

BODY OPTIONS AND UPGRADES

NO Plastic Grating (LR, WA)

ROPE ANCHOR OR PORTABLE WINCH RECEIVERS

The completed unit shall have an integrated receiver or anchor system for use with removable rope anchor point and/or a portable electric winch, when specified.

Receivers or anchors installed at any location on the apparatus for use as removable winch anchors shall be designed and affixed to provide at least a 2.0 to 1 straight line pull no-yield safety factor over the load rating of the removable winch.

Receivers or anchors installed at any location on the apparatus for use with rope operations shall be designed and affixed to the apparatus to provide at least a 9,000 lbf (40,000 N) no-yield condition with a straight line pull.

A safety sign FAMA28 shall be located on or near each receiver or anchor stating the maximum straight line pull rating.

Side receiver(s) (if specified) shall have the following load rating:

	<u>STRAIGHT PULL</u>	<u>SAFETY FACTOR</u>
Rope Tie Off:	600 Lbs.	15:1
Winch:	5,000 Lbs.	2:1

Front and/or rear receiver(s) (if specified) shall have the following load rating:

	<u>STRAIGHT PULL</u>	<u>SAFETY FACTOR</u>
Rope Tie Off:	600 Lbs.	15:1
Winch:	Winch Load Rating (9,000 Lbs. Max)	2:1

The following items shall be provided to accomplish rope rescue and/or portable winch operation;

ACCESSORIES

- Two (2) removable rope anchor(s) shall be provided for use with lower body specified receivers. Each rope anchor shall be fabricated from 3/4" steel, 2" high x 11.5" long with a 3" OD/2" ID eyelet. Eyelet end shall have radiused edge to prevent damage to rope or carabineer. Each rope anchor shall have a black powder coat paint finish.
- An aluminum mounting bracket shall be provided to store rope anchor(s) inside a body compartment as close to receiver location as possible.

A portable winch shall not be provided with completed unit.

STREETSIDE WHEEL WELL

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with black hammertone powder coat paint finish located on the streetside of the body in the forward wheel well panel area for use with removable rope anchor and/or a portable electric winch (when specified).
- A steel 5/8" x 3" hitch pin shall be provided with each receiver tube.
 - There shall be one (1) 12 VDC plug(s) with quick connect provided to power a Warn portable winch. All 12 VDC cables to be sized according to Warn and installation for intended use.
 - One (1) 12" x 2" M x 2" F winch mounting adapter(s) shall be provided. Winch adapter will extend the specified portable winch 6" from receiver. An aluminum mounting bracket shall be provided to store winch adapter(s) inside a body compartment as close to receiver location as possible.
 - The receiver(s) shall have one (1) rubber cover(s) provided.

STREETSIDE WHEEL WELL

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with black hammertone powder coat paint finish located on the streetside of the body in the rearward wheel well panel area for use with removable rope anchor and/or a portable electric winch (when specified).
- A steel 5/8" x 3" hitch pin shall be provided with each receiver tube.
 - The receiver(s) shall have one (1) rubber cover(s) provided.

CURBSIDE WHEEL WELL

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with black hammertone powder coat paint finish located on the curbside of the body in the forward wheel well panel area for use with removable rope anchor and/or a portable electric winch (when specified).
- A steel 5/8" x 3" hitch pin shall be provided with each receiver tube.
 - There shall be one (1) 12 VDC plug(s) with quick connect provided to power a Warn portable winch. All 12 VDC cables to be sized according to Warn and installation for intended use.
 - One (1) 12" x 2" M x 2" F winch mounting adapter(s) shall be provided. Winch adapter will extend the specified portable winch 6" from receiver. An aluminum mounting bracket shall be provided to store winch adapter(s) inside a body compartment as close to receiver location as possible.
 - The receiver(s) shall have one (1) rubber cover(s) provided.

CURBSIDE WHEEL WELL

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with black hammertone powder coat paint finish located on the curbside of the body in the rearward portion of the wheel well panel for use with removable rope anchor and/or a portable electric winch (when specified).
- A steel 5/8" x 3" hitch pin shall be provided with each receiver tube.

- The receiver(s) shall have one (1) rubber cover(s) provided.

REAR BUMPER

- The specified rear trailer hitch shall be compatible with the removable rope anchor point and/or a portable electric winch (when specified).
- A steel 5/8" x 3" hitch pin shall be provided with each receiver tube.
 - There shall be one (1) 12 VDC plug(s) with quick connect provided to power a Warn portable winch. All 12 VDC cables to be sized according to Warn and installation for intended use.
 - The receiver(s) shall have one (1) rubber cover(s) provided.

LOWER SIDE BODY PROTECTION - RUB RAIL

OnScene Solutions rub rails shall be provided below the compartment door openings on both the streetside and curbside.

The rub rail shall be fabricated from 6063 extruded aluminum, measuring approximately 2-3/4" high x 1-3/8" thick with tapered aluminum end caps. The rub rail shall be bolted to the body using stainless steel bolts and 1-1/2" diameter x 5/8" thick rubber mount isolators to prevent damage to the body.

The rails shall incorporate LED clearance marker lighting recessed into the rail fascia to avoid damage to the light in case of impact. The rub rail shall have an accessory mounting track integrated into the backside of the rail to allow mounting of accessories such as ground lighting.

3M™ Diamond Grade™ striping shall be provided in the rub rail. The striping shall be **BLACK** in color.

FRONT GRAVEL GUARDS

Gravel guards shall be provided on front lower body corners. Guards shall be 12" high, extend from behind cab or step and wrap around to the front compartment door opening fabricated from 20 gauge brushed stainless steel.

LOW VOLTAGE ELECTRICAL SYSTEM- 12 VDC

General

Any low voltage electrical systems or warning devices installed on the fire apparatus shall be appropriate for the mounting location and intended electrical load.

Where wire passes through sheet metal, grommets shall be used to protect wire and wire looms. Electrical connections shall be with double crimp water-tight heat shrink connectors.

All 12 VDC wiring running from front to back of vehicle body shall be run in full length electrical wiring raceway down each side of body.

Wiring

All electrical circuit feeder wiring supplied and installed by the fire apparatus manufacturer shall meet the requirements of NFPA Chapter 13.

The circuit feeder wire shall be stranded copper or copper alloy conductors of a gauge rated to carry 125% of the maximum current for which the circuit is protected. Voltage drops in all wiring from the power source to the using device shall not exceed 10%. The use of star washers for circuit ground connections shall not be permitted.

All circuits shall otherwise be wired in conformance with SAE J1292, *Automobile, Truck, Truck-Tractor, Trailer, and Motor Coach Wiring*.

Wiring and Wire Harness Construction

All insulated wire and cable shall conform to SAE J1127, *Low Voltage Battery Cable*, or SAE J1128, *Low Voltage Primary Cable*, type SXL, GXL, or TXL.

All conductors shall be constructed in accordance with SAE J1127 or SAE J1128, except where good engineering practice dictates special strand construction. Conductor materials and stranding, other than copper, shall be permitted if all applicable requirements for physical, electrical, and environmental conditions are met as dictated by the end application. Physical and dimensional values of conductor insulation shall be in conformance with the requirements of SAE J1127 or SAE J1128, except where good engineering practice dictates special conductor insulation. The overall covering of conductors shall be moisture-resistant loom or braid that has a minimum continuous rating of 194°F (90°C) except where good engineering practice dictates special consideration for loom installations exposed to higher temperatures. The overall covering of jacketed cables shall be moisture resistant and have a minimum continuous temperature rating of 194°F (90°C), except where good engineering practice dictates special consideration for cable installations exposed to higher temperatures.

All wiring connections and terminations shall use a method that provides a positive mechanical and electrical connection. The wiring connections and terminations shall be installed in accordance with the device manufacturer's instructions. All ungrounded electrical terminals shall have protective covers or be in enclosures. Wire nut, insulation displacement, and insulation piercing connections shall not be used.

Wiring shall be restrained to prevent damage caused by chafing or ice buildup and protected against heat, liquid contaminants, or other environmental factors.

Wiring shall be uniquely identified at least every 2 ft (0.6 m) by color coding or permanent marking with a circuit function code. The identification shall reference a wiring diagram.

Circuits shall be provided with properly rated low voltage over-current protective devices. Such devices shall be readily accessible and protected against heat in excess of the over-current device's design range, mechanical damage, and water spray. Circuit protection shall be accomplished by utilizing fuses, circuit breakers, fusible links, or solid state equivalent devices.

If a mechanical-type device is used, it shall conform to one of the following SAE standards:

- 1) SAE J156, *Fusible Links*
- 2) SAE J553, *Circuit Breakers*
- 3) SAE J554, *Electric Fuses (Cartridge Type)*
- 4) SAE J1888, *High Current Time Lag Electric Fuses*
- 5) SAE J2077, *Miniature Blade Type Electrical Fuses*

Switches, relays, terminals, and connectors shall have a direct current (dc) rating of 125% of maximum current for which the circuit is protected.

Power Supply

A 12 V or greater electrical alternator shall be provided. The alternator shall have a minimum output at idle to meet the minimum continuous electrical load of the vehicle, at 200°F (93°C) ambient temperature within the engine compartment, and shall be provided with full automatic regulation.

Minimum Continuous Electrical Load

The minimum continuous electrical load shall consist of the total amperage required to simultaneously operate the following in a stationary mode during emergency operations:

- 1) The propulsion engine and transmission
- 2) All legally required clearance and marker lights, headlights, and other electrical devices except windshield wipers and four-way hazard flashers
- 3) The radio(s) at a duty cycle of 10 percent transmit and 90% receive (for calculation and testing purposes, a default value of 5 A continuous)
- 4) The lighting necessary to produce 2 fc (20 lx) of illumination on all walking surfaces on the apparatus and on the ground at all egress points onto and off the apparatus, 5 fc (50 lx) of illumination on all control and instrument panels, and 50 percent of the total compartment lighting loads
- 5) The minimum optical warning system, where the apparatus is blocking the right-of way
- 6) The continuous electrical current required to simultaneously operate any fire pumps, aerial devices, and hydraulic pumps
- 7) Other warning devices and electrical loads defined by the purchaser as critical to the mission of the apparatus

If the apparatus is equipped to tow a trailer, an additional 45 A shall be added to the minimum continuous electrical load to provide electrical power for the federally required clearance and marker lighting and the optical warning devices mounted on the trailer.

The condition of the low voltage electrical system shall be monitored by a warning system that provides both an audible and a visual signal to persons on, in, or near the apparatus of an impending electrical system failure caused by the excessive discharge of the battery set.

The charge status of the battery shall be determined either by direct measurement of the battery charge or indirectly by monitoring the electrical system voltage.

If electrical system voltage is monitored, the alarm shall sound if the system voltage at the battery or at the master load disconnect switch drops below 11.8 V for 12 V nominal systems, 23.6 V for 24 V nominal systems, or 35.4 V for 42 V nominal systems for more than 120 seconds.

A voltmeter shall be mounted on the driver's instrument panel to allow direct observation of the system voltage.

Electromagnetic Interference

Electromagnetic interference suppression shall be provided, as required, to satisfy the radiation limits specified in SAE J551/1, *Performance Levels and Methods of Measurement of Electromagnetic Compatibility of Vehicles, Boats (up to 15 m), and Machines (16.6 Hz to 18 GHz)*.

Wiring Diagram

A complete electrical wiring schematic of actual system shall be provided with finished apparatus. Similar or generic type electrical schematics shall NOT BE ACCEPTABLE.

Low Voltage Electrical System Performance Test

A low voltage electrical system test certification shall be provided with delivered apparatus.

12 VOLT DIAGNOSTIC RELAY CONTROL CENTER

The 12 volt power distribution shall be conveniently located with easy access for service. All relays and circuit breakers shall be plug-in type allowing for removal for repairs without necessitating soldering or tools. The sockets mounts for both the relays and circuit breakers shall be of a design that permits the use of standard automotive type components.

The 12 volt distribution panel shall utilize printed circuit boards mounted in high strength enclosure. Each printed circuit board shall be provided with twelve (12) heavy duty independent switching relays. Each relay shall have the ability to be configured either normally open or normally closed and be protected by a 20 amp automatic reset breaker. Each circuit will be provided with a LED for visual diagnostic.

Power distribution panel shall be located in apparatus body within a protected enclosure with removable or hinged cover.

ROCKER SWITCH PANEL

The 12 volt control switch panel shall be supplied and installed by the cab/chassis manufacturer.

ELECTRICAL SYSTEM MANAGER

The chassis shall contain an electrical system manager for:

- Monitoring chassis battery voltage
- Shedding pre-determined electrical circuits
- Sequencing pre-determined electrical circuits
- Automatically controlling chassis engine fast-idle
- Monitor master switch and parking brake applications
- Automatically control warning light modes ("Calling-For" and "Blocking Right of Way")
- Provide low voltage alarm
- Programmable control circuits

- Remote system status indicator panel

System manager shall perform all electrical functions required by current NFPA 1901 Standards.

The electrical system manager shall be supplied and installed by the cab/chassis manufacturer.

BATTERY SYSTEM

Any body builder supplied battery connections shall be heavy duty type with cables terminating in heat shrink loom. Heavy duty battery cables shall provide maximum power to the electrical system. Where required, the cables shall be shielded from exhaust tubing and the muffler. Large rubber grommets shall be provided where cables enter the battery compartment.

Where an enclosed battery compartment is provided, it shall be ventilated to the exterior to prevent the buildup of heat and explosive fumes. The batteries shall be protected against vibration and temperatures that exceed the battery manufacturer's recommendation.

BATTERY SWITCH

One (1) battery disconnect switch shall be provided in cab located within easy reach of driver with green indicator light that is visible from the driver's position. The switch and indicator light shall be supplied and installed by the cab/chassis manufacturer.

BATTERY SOLENOID

Battery switch shall consist of a minimum 200 ampere, constant duty solenoid to feed from positive side of battery.

BATTERY CONDITIONER

The battery conditioner shall be supplied and installed by the cab chassis manufacturer.

SHORE POWER INLET

The shore power inlet for battery conditioner shall be supplied and installed by the cab chassis manufacturer.

- The shore power plug shall be located near the Driver door area.

BODY MOUNTED 360 CAMERAS

The cab chassis provided three (3) Brigade Backeye series 360 cameras shall be installed on the sides and rear of the body. Camera system shall be calibrated and operational upon delivery.

TAIL LIGHTS

Rear body tail lights shall be vertically mounted and located per Federal Motor Vehicle Safety Standards, FMVSS and Canadian Motor Vehicle Safety Standards CMVSS. The following lights shall be provided;

- Two (2) Whelen 60A00TAR amber LED sequential arrow turn signal lights, **CLEAR** lens
- Two (2) Whelen 60BTT red LED brake and tail lights, **CLEAR** lens
- Two (2) Whelen 60C00WCR white LED back-up lights, clear lens

NOTE: these will all be clear lenses.

Each light shall have a chrome flange.

MIDSHIP MARKER/TURN SIGNAL

Two (2) Whelen model T0A00MAR 2" round amber LED midship body clearance marker/turn signal lights shall be provided and installed, one (1) light on each side of the body, in forward wheel well of rear axle. Midship marker/turn lights shall be wired to the headlight circuit of the chassis.

MARKER LIGHTS

The body shall be equipped with all necessary side and rear clearance lights and reflectors in accordance with Federal Motor Vehicle Safety Standards (FMVSS) and Canadian Motor Vehicle Safety Standards (CMVSS). Clearance lights on body shall be connected to the clearance light circuit of the chassis.

REAR BUMPER MARKER LIGHTS

Two (2) Britax style dual face flexible mounted rear bumper markers shall be located, one (1) each side lower rear corner of body visible from driver mirrors.

LICENSE PLATE MOUNTING BRACKET

A license plate mounting bracket shall not be provided on completed unit.

LIGHT TOWER

One (1) Command Light Knight 2, KL Series light tower(s) shall be provided and installed on the completed unit.

The Command Light shall be covered by a five (5) year limited warranty from defects in materials and workmanship. An operation, maintenance, and parts manual shall be provided with the completed unit.

Light Tower Construction and Design

The Command Light assembly shall be of aluminum construction, with stainless steel shafts and bronze bushings for long life and low maintenance.

The electrically controlled unit shall not require usage of the vehicle's air supply for operation, thereby eliminating the chance for air leaks in the vehicle braking system. Hydraulic or pneumatic type floodlights are not acceptable alternatives to the specified all electric light tower.

The light tower shall be tested to in wind conditions of 90 mph (150 kph) minimum. Other type floodlights that have not been tested to these conditions are not acceptable.

The light tower shall be capable of overhanging the side or back of the vehicle to provide maximum illumination to the vicinity adjacent to the vehicle for the safety of emergency personnel in high traffic conditions. Any tower that is only capable of rotations at the top of a pole is not an acceptable alternative to the specified tower.

Light Tower Electrical System

The light tower shall be a two-stage articulating device with a lighting bank on top of the second stage capable of continuous 360 degree rotation. The light shall be elevated by electric linear actuators, one (1) actuator shall elevate the light bank and one (1) actuator shall adjust the light bank angle from 0 to 110 degrees. Power for the light bank shall be supplied through power collecting rings thus allowing continuous 360 degree rotation in either direction.

The tower base shall have a light that illuminates the envelope of motion during any movement of the light tower mast per NFPA 1900.

A red flashing or rotating light located in the driving compartment shall be illuminated automatically whenever the vehicles parking brake is not fully engaged, indicating that the light tower is not in stowed position, as required by NFPA 1900.

Light Tower Floodlights

The Command Light model KL415D-CH shall be equipped with the following bank of floodlights:

Floodlight manufacturer:	FireTech
Number of lamp heads:	Six (6) Helios
Voltage:	12 volts
Watts of each lamp head:	60 watt
Total watts of light tower:	360 watts
Total lumens of light tower:	84,000 lumens
Configuration:	The light heads shall be mounted with three (3) on each side of the light tower, giving two (2) vertical lines of three (3) when the lights are in the upright position.

Light Tower Backlight Option

A backlight option shall be provided on the light tower. The lower pair of light heads shall be capable of being rotated about a horizontal axis 180 degree, providing light down on the vehicle or to the opposite side of the vehicle while allowing the fixed lights to remain pointed at the scene.

The hand-held remote control shall have an additional switch supplied for the backlight rotation option.

Light Tower Paint

The light tower shall be electro-statically powder coated with a hammer tone gray color.

Light Tower Controls

The light tower(s) shall be operated with a hand-held 15-foot umbilical line remote control. The storage station for the remote control unit shall be equipped with a button to activate the "Auto-Park" automatic nesting feature. The remote control shall be located per the itemized compartment list and include;

- Three (3) switches; one (1) for each pair of lights.
- One (1) switch for light bank rotation.
- One (1) switch for elevating lower stage.
- One (1) switch for elevating upper stage.
- One (1) switch for optional light bank rotation.
- One (1) switch for the optional strobe.
- One (1) indicator light to indicate when light bank is out of the roof nesting position.

One (1) indicator light to indicate when light bank is rotated to proper nesting position.

Light Tower Mounting

The specified light tower(s) shall be mounted on the roof of the body.

Where the light tower is to be mounted above a finished walk-in area; the roof backing plates and structure shall have threaded holes to allow removal of light tower without removal of the interior paneling.

Where the light tower is mounted in close proximity to other roof mounted items (i.e. antennas, air conditioners, and weather stations) the light tower shall be orientated in order to help prevent a operator driven collision.

SIDE LED SCENE LIGHTS

There shall be four (4) HiViz Guardian Elite model FT-GESM, 9" x 7" surface mounted scene light(s) provided on the upper body. Light quantity shall be divided equally per side. The Guardian series light shall have 12,290 useable lumens each. Each light shall have a chrome flange. T

Two (2) switches shall be provided, one (1) for the streetside scene lights, and one (1) for the curbside scene lights.

The Lights shall be controlled at the Switch Panel in Cab.

REAR LED SCENE LIGHTS

Two (2) HiViz Guardian Elite model FT-GESM, 9" x 7" surface mounted scene lights shall be provided on the upper rear body to light the work area immediately behind the vehicle. The Guardian series light shall have 12,290 useable lumens each. Each light shall have a chrome flange.

The above scene lights shall light to a level of at least 3 fc (30 lx), measured at 25 equally spaced points on a 2.5 ft (750 mm) grid with in a 10 ft x 10 ft (3 m x 3m) square to the rear of vehicle.

The Lights shall be controlled at the Switch Panel in Cab.

The rear scene lights shall also be activated when the apparatus is in reverse.

WARNING LIGHT PACKAGE

Each apparatus shall have a system of optical warning devices that meets or exceeds the requirements of this section.

The optical warning system shall consist of an upper and a lower warning level. The requirements for each level shall be met by the warning devices in that particular level without consideration of the warning devices in the other level.

For the purposes of defining and measuring the required optical performance, the upper and lower warning levels shall be divided into four (4) warning zones. The four zones shall be determined by lines drawn through the geometric center of the apparatus at 45 degrees to a line drawn lengthwise through the geometric center of the apparatus. The four (4) zones shall be designated A, B, C, and D in a clockwise direction, with zone A to the front of the apparatus.

Each optical warning device shall be installed on the apparatus and connected to the apparatus's electrical system in accordance with the requirements of this standard and the requirements of the manufacturer of the device.

A master optical warning system switch that energizes all the optical warning devices shall be provided.

The optical warning system on the fire apparatus shall be capable of two (2) separate signaling modes during emergency operations. One (1) mode shall signal to drivers and pedestrians that the apparatus is responding to an emergency and is calling for the right-of-way. One (1) mode shall signal that the apparatus is stopped and is blocking the right-of-way. The use of some or all of the same warning lights shall be permitted for both modes provided the other requirements of this chapter are met.

A switching system shall be provided that senses the position of the parking brake or the park position of an automatic transmission. When the master optical warning system switch is closed and the parking brake is released or the automatic transmission is not in park, the warning devices signaling the call for the right-of-way shall be energized. When the master optical warning system switch is closed and the parking brake is on or the automatic transmission is in park, the warning devices signaling the blockage of the right-of-way shall be energized. The system shall be permitted to have a method of modifying the two (2) signaling modes.

The optical warning devices shall be constructed or arranged so as to avoid the projection of light, either directly or through mirrors, into any driving or crew compartment(s). The front optical warning devices shall be placed so as to maintain the maximum possible separation from the headlights.

Steadily burning, non flashing optical sources shall be permitted to be used.

Control System: Whelen

No CORE System

UPPER LEVEL OPTICAL WARNING DEVICES

The upper-level optical warning devices shall be mounted as high and as close to the corner points of the apparatus as is practical to define the clearance lines of the apparatus. The upper-level optical warning devices shall not be mounted above the maximum height, specified by the device manufacturer.

ZONE A - FRONT WARNING LIGHTS

See Chassis Modification section for cab mounted warning lights.

ZONES B AND D - SIDE WARNING LIGHTS

UPPER REAR CORNER WARNING LIGHTS

There shall be two (2) Whelen 900 Series, linear super-LED Light(s) with full-fill optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

- Red LEDs
- Clear Lens

Each light shall have a chrome flange.

Flash Pattern shall be (factory default) Whelen ACTION SCAN

The Lights shall be controlled at the Switch Panel in Cab.

UPPER FORWARD CORNER WARNING LIGHTS

There shall be two (2) Whelen 900 Series, linear super-LED Light(s) with full-fill optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

- Red LEDs
- Clear Lens

Each light shall have a chrome flange.

Flash Pattern shall be (factory default) Whelen ACTION SCAN

The Lights shall be controlled at the Switch Panel in Cab.

ZONE C - REAR WARNING LIGHTS

There shall be two (2) Whelen 900 Series, linear super-LED Light(s) with full-fill optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

- Red LEDs
- Clear Lens

Each light shall have a chrome flange.

Flash Pattern shall be (factory default) Whelen ACTION SCAN

The Lights shall be controlled at the Switch Panel in Cab.

ZONE C - REAR MID WARNING LIGHTS

There shall be two (2) Whelen 900 Series, linear super-LED Light(s) with full-fill optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

- Red LEDs
- Red Lens

Each light shall have a chrome flange.

Flash Pattern shall be (factory default) Whelen ACTION SCAN

The Lights shall be controlled at the Switch Panel in Cab.

LOWER LEVEL OPTICAL WARNING DEVICES

To define the clearance lines of the apparatus, the optical center of the lower-level optical warning devices in the front of the vehicle shall be mounted on or forward of the front axle centerline and as close to the front corner points of the apparatus as is practical.

The optical center of the lower-level optical warning devices at the rear of the vehicle shall be mounted on or behind the rear axle centerline and as close to the rear corners of the apparatus as is practical. The optical center of any lower-level device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground for large apparatus, and 18 in. and 48 in. (460 mm and 1600 mm) above level ground.

A midship optical warning device shall be mounted right and the left sides of the apparatus if the distance between the front and rear lower-level optical devices exceeds 25 ft (7.6 m) at the optical center. Additional midship optical warning devices shall be required, where necessary, to maintain a horizontal distance between the centers of adjacent lower-level optical warning devices of 25 ft (7.6 m) or less. The optical center of any midship mounted optical warning device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground.

ZONE A - FRONT WARNING LIGHTS, LOWER

See Chassis Modification section for cab mounted warning lights.

ZONES B AND D - BODY LIGHT (BODY AUXILLARY - RUBRAIL)

FIRST PAIR FRONT RUB-RAIL LIGHTS

- So as to divide the length of the rub rail(s) evenly.

There shall be two (2) Whelen surface mount ION Series LED light(s) with wide angle optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns.

Each light shall have:

- Red LEDs
- Clear Lens
- Chrome Flange

The lights shall be controlled at the multiplex display(s) in the cab.

SECOND PAIR FRONT RUB-RAIL LIGHTS

- Centered under each door opening.

There shall be two (2) Whelen surface mount ION Series LED light(s) with wide angle optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns.

Each light shall have:

- Red LEDs
- Clear Lens
- Chrome Flange

The lights shall be controlled at the multiplex display(s) in the cab.

FIRST PAIR REAR RUB-RAIL LIGHTS

- Centered under each door opening.

There shall be two (2) Whelen surface mount ION Series LED light(s) with wide angle optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns.

Each light shall have:

- Red LEDs
- Clear Lens
- Chrome Flange

The lights shall be controlled at the multiplex display(s) in the cab.

ZONES B AND D - BODY LIGHT (BODY WHEELWELL AREA)

There shall be four (4) Whelen surface mount ION Series LED light(s) with wide angle optic provided, two (2) each side. The light head shall include an integral flasher with programmable flash patterns.

Each light shall have:

- Red LEDs
- Clear Lens

- Chrome Flange

The Lights shall be controlled at the Switch Panel in Cab.

ZONES B AND D - BODY INTERSECTOR LIGHT (BODY REAR CORNERS)

There shall be two (2) Whelen 600 Series, linear super-LED Light(s) with full-fill optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

- Red LEDs
- Clear Lens

Each light shall have a chrome flange.

Flash Pattern shall be (factory default) Whelen ACTION SCAN

The Lights shall be controlled at the Switch Panel in Cab.

ZONE C - REAR WARNING LIGHTS (LOWER REAR CORNERS)

There shall be two (2) Whelen 600 Series, linear super-LED Light(s) with full-fill optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

- Red LEDs
- Clear Lens

Each light shall have a chrome flange.

Flash Pattern shall be (factory default) Whelen ACTION SCAN

The Lights shall be controlled at the Switch Panel in Cab.

LINE VOLTAGE ELECTRICAL SYSTEM

LINE VOLTAGE ELECTRICAL SYSTEM

All components, equipment, and installation procedures shall conform to *NFPA 70, National Electrical Code*, except where superseded by the requirements of this chapter. Where the requirements of this chapter differ from those in *NFPA 70*, the requirements in this chapter shall apply.

Receptacle Label

Each receptacle shall be marked with a label indicating the nominal line voltage (120 volts or 240 volts) and the current rating in amps of the circuit. If the receptacle is DC or other than single phase, that information shall also be marked on the label.

All receptacles and electrical inlet devices shall be listed to UL 498, *Standard for Safety Attachment Plugs and Receptacles*, or other recognized performance standards.

Receptacles used for DC voltages shall be rated for DC service.

Wiring Schematics

An "As-Built" Wiring diagrams for line voltage systems shall be provided to include the following information;

- (a) Pictorial representations of circuit logic for all electrical components and wiring
- (b) Circuit identification
- (c) Connector pin identification
- (d) Zone location of electrical components
- (e) Safety interlocks
- (f) Alternator–battery power distribution circuits
- (g) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems

EQUIPMENT PAYLOAD WEIGHT ALLOWANCE

In compliance with NFPA 1901 standards, the special service vehicle shall be designed for an equipment loading allowance of 10,000 lbs. of Clemson Fire and EMS provided equipment based on a 60,001 pound and up gross vehicle weight rating.

EQUIPMENT

The following equipment shall be furnished with the completed special service vehicle;

- One (1) container of assorted stainless steel nuts, bolts, screws and washers used in the construction of the apparatus shall be provided with the completed apparatus.
- There shall be two (2) Zico SAC-44-E NFPA approved folding aluminum wheel chocks provided for 44" diameter tires that together will hold the vehicle when loaded to its GVWR or GCWR, on a hard surface with a 20 % grade, with the transmission in neutral, and the parking brake released.
 - The wheel chock(s) shall be mounted behind rear wheels, below body on streetside.
- One (1) Duo-Safety 900-A series 24' 2-section extension ladder(s) shall be provided with the completed unit.
 - The ladder(s) shall be located in specified ladder compartment.
- One (1) Duo-Safety 775A series 14' aluminum roof ladder(s) shall be provided with the completed unit.
 - The ladder(s) shall be located in specified ladder compartment.
- One (1) Duo-Safety 585-A 10' aluminum folding ladder(s) shall be provided with the completed unit.
 - The ladder(s) shall be located in specified ladder compartment.
- Flashlight(s) shall be the responsibility of Clemson Fire and EMS after delivery of completed apparatus.

REMAINING NFPA MINOR EQUIPMENT BY PURCHASER

All other minor equipment not specified above, but required by NFPA 1901 for special service vehicles, section 10.9.3 shall be supplied and mounted by Clemson Fire and EMS before the unit is placed in emergency service.