

Honolulu Fire Department

Production Specifications – SVI #1090-1091

INTERNET IN-PROCESS SITE

The manufacturer shall post and maintain a website where the Honolulu Fire Department will be able to view digital images of their apparatus as its being built. The digital images shall be posted once a week starting when the body begins production or when the cab/chassis arrives and shall continue until the final completion of unit.

VEHICLE STABILITY SUPPLIED WITH CAB/CHASSIS

The cab/chassis shall be equipped with a stability control system. The system shall have, at a minimum, a steering wheel position sensor, a vehicle yaw sensor, a lateral accelerometer and individual wheel brake controls.

FIRE APPARATUS PERFORMANCE

The fire apparatus shall meet the requirements of this standard at elevations of 2000 ft (600 m) above sea level.

The fire apparatus shall meet all the requirements of this standard while stationary on a grade of 6 percent in any direction.

The fire apparatus shall meet the requirements of this standard in ambient temperature conditions between 32°F (0°C) and 110°F (43°C).

HIGHWAY PERFORMANCE

The apparatus, when loaded to its estimated in-service weight, shall be capable of the following performance while on dry, paved roads that are in good condition:

- 1) Accelerating from 0 to 35 mph (55 km/hr) within 25 seconds on a 0 percent grade
- 2) Attaining a speed of 50 mph (80 km/hr) on a 0 percent grade
- 3) Maintaining a speed of at least 20 mph (32 km/hr) on any grade up to and including 6 percent

The maximum top speed of fire apparatus with a GVWR over 26,000 lb (11,800 kg) shall not exceed either 68 mph (109 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

If the combined water tank and foam agent tank capacities on the fire apparatus exceed 1250 gal (4732 L), or the GVWR of the vehicle is over 50,000 lb (22,680 kg), the maximum top speed of the apparatus shall not exceed either 60 mph (95 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

SERVICEABILITY

The fire apparatus shall be designed to allow the manufacturer's recommended routine maintenance checks of lubricant and fluid levels to be performed by the operator without lifting the cab of a tilt-cab apparatus or without the need for hand tools.

Where special tools are required for routine service on any component of the apparatus, such tools shall be provided with the apparatus.

Apparatus components that interfere with repair or removal of other major components shall be attached with fasteners, such as cap screws and nuts, so that the components can be removed and installed with ordinary hand tools. These components shall not be welded or otherwise permanently secured into place.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

FIRE APPARATUS DOCUMENTATION

The contractor shall supply, at the time of delivery, at least one (1) copy of the following documents:

- 1) The manufacturers record of apparatus construction details, including the following documents:
 - a) Owner's name and address
 - b) Apparatus manufacturer, model, and serial number
 - c) Chassis make, model, and serial number
 - d) GAWR of front and rear axles and GVWR
 - e) Front tire size and total rated capacity in pounds (kilograms)
 - f) Rear tire size and total rated capacity in pounds (kilograms)
 - g) Chassis weight distribution in pounds (kilograms) with water and manufacturer-mounted equipment (front and rear)
 - h) Engine make, model, serial number, rated horsepower and related speed, and governed speed; and if so equipped, engine transmission PTO(s) make, model, and gear ratio
 - i) Type of fuel and fuel tank capacity
 - j) Electrical system voltage and alternator output in amps
 - k) Battery make, model, and capacity in cold cranking amps (CCA)
 - l) Chassis transmission make, model, and serial number; and if so equipped, chassis transmission PTO(s) make, model, and gear ratio
 - m) Ratios of all driving axles
 - n) Maximum governed road speed
 - o) Pump make, model, rated capacity in gallons per minute (liters per minute where applicable), maximum discharge pressure capability rating, and serial number
 - p) Pump transmission make, model, serial number, and gear ratio
 - q) Auxiliary pump make, model, rated capacity in gallons per minute (liters per minute where applicable), and serial number
 - r) Water tank certified capacity in gallons or liters
 - s) Foam tank (if provided) certified capacity in gallons (liters)
 - t) Aerial device type, rated vertical height in feet (meters), rated horizontal reach in feet (meters), and rated capacity in pounds (kilograms)
 - u) Paint manufacturer and paint number(s)
 - v) Company name and signature of responsible company representative
 - w) Weight documents from a certified scale showing actual loading on the front axle, rear axle(s), and overall fire apparatus (with the water tank full but without personnel, equipment, and hose)
- 2) Certification of compliance of the optical warning system (*see 13.8.16*)
- 3) Siren manufacturer's certification of the siren (*see 13.9.1.1*)
- 4) Written load analysis and results of the electrical system performance tests (*see 13.14.1 and Section 13.15*)
- 5) Certification of slip resistance of all stepping, standing, and walking surfaces (*see 15.7.4.5*)
- 6) If the apparatus has a line voltage power source, the certification of the test for the power source (*see 22.15.7.2*)
- 7) If the apparatus is equipped with an air system, air tank certificates (*see 24.5.1.2*), the SCBA fill station certification (*see 24.9.6*), and the results of the testing of the air system installation (*see 24.14.5 and 24.15.4*)
- 8) Any other required manufacturer test data or reports

Honolulu Fire Department

Production Specifications – SVI #1090-1091

OPERATIONS AND SERVICE DOCUMENTATION

The contractor shall deliver with the fire apparatus complete operation and service documentation covering the completed apparatus as delivered and accepted.

The documentation shall address at least the inspection, service, and operations of the fire apparatus and all major components thereof.

The contractor shall also deliver with the fire apparatus the following documentation for the entire apparatus and each major operating system or major component of the apparatus:

- 1) Manufacturer's name and address
- 2) Country of manufacture
- 3) Source for service and technical information
- 4) Parts replacement information
- 5) Descriptions, specifications, and ratings of the chassis, pump (if applicable), and aerial device (if applicable)
- 6) Wiring diagrams for low voltage and line voltage systems to include the following information:
 - a) Pictorial representations of circuit logic for all electrical components and wiring
 - b) Circuit identification
 - c) Connector pin identification
 - d) Zone location of electrical components
 - e) Safety interlocks
 - f) Alternator–battery power distribution circuits
 - g) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems
- 7) Lubrication charts
- 8) Operating instructions for the chassis, any major components such as a pump or aerial device, and any auxiliary systems
- 9) Precautions related to multiple configurations of aerial devices, if applicable
- 10) Instructions regarding the frequency and procedure for recommended maintenance
- 11) Overall apparatus operating instructions
- 12) Safety considerations
- 13) Limitations of use
- 14) Inspection procedures
- 15) Recommended service procedures
- 16) Troubleshooting guide
- 17) Apparatus body, chassis and other component manufacturer's warranties
- 18) Special data required by this standard
- 19) A material safety data sheet (MSDS) for any fluid that is specified for use on the apparatus

The contractor shall deliver with the apparatus all manufacturer's operations and service documents supplied with components and equipment that are installed or supplied by the contractor.

NFPA REQUIRED DOCUMENTATION FORMAT - USB FLASH DRIVE

The vehicle construction details and the operations and service documentation as required per NFPA 1901 latest edition shall be provided on a USB Flash Drive. These manuals shall be divided into sections for ease of reference. There shall be two (2) USB flash drives provided with the completed vehicle.

FIRE APPARATUS SAFETY GUIDE

A Fire Apparatus Safety Guide published by Fire Apparatus manufacturer's Association shall be provided with delivered vehicle. This manual includes essential safety information for fire fighters, fire chiefs, apparatus mechanics, and fire department safety officers. The guide is applicable to municipal, wildland, and airport fire fighting apparatus manufactured on either custom or commercial chassis.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

STATEMENT OF EXCEPTIONS

The final-stage manufacturer shall deliver with the fire apparatus either a certification that the apparatus fully complies with all requirements of this standard or alternatively, a Statement of Exceptions specifically describing each aspect of the completed apparatus that is not fully compliant with the requirements of this standard at the time of delivery.

The Statement of Exceptions shall contain, for each noncompliant aspect of the apparatus or missing required item, the following information:

- 1) A separate specification of the section of the applicable standard for which compliance is lacking
- 2) A description of the particular aspect of the apparatus that is not in compliance therewith or required equipment that is missing
- 3) A description of the further changes or modifications to the delivered apparatus that must be completed to achieve full compliance
- 4) Identification of the entity that will be responsible for making the necessary post delivery changes or modifications or for supplying and installing any missing required equipment to the apparatus to achieve full compliance with this standard

Prior to or at the time of delivery of the apparatus, the Statement of Exceptions shall be signed by an authorized agent of the entity responsible for final assembly of the apparatus and by an authorized agent of the purchasing entity, indicating mutual understanding and agreement between the parties regarding the substance thereof.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CARRYING CAPACITY

The GAWR and the GCWR or GVWR of the chassis shall be adequate to carry the weight of the completed vehicle when loaded to its estimated in-service weight. The manufacturer shall establish the estimated in service weight during the design of the vehicle.

The estimated in-service weight shall include the following:

1. The chassis, body and tank(s)
2. Full fuel, lubricant, and other chassis or component fluid tanks or reservoirs
3. Full water and other agent tanks
4. *250 lb (114 kg) in each seating position
5. Fixed equipment such as pumps, aerial devices, generators, reels and air systems as installed
6. Ground ladders, suction hose, designed hose load in their hose beds and on their reels
7. An allowance for miscellaneous equipment that is the greatest of the following:
 - a) The values shown for items 1 - 7
 - b) A purchaser-provided list of equipment to be carried with weights
 - c) A purchaser-specified miscellaneous equipment allowance

The manufacturer shall engineer and design the fire apparatus such that the completed apparatus, when loaded to its estimated in-service weight, with all movable weights distributed as close as is practical to their intended in-service configuration, does not exceed the GVWR.

A final manufacturer's certification of the GVWR or GCWR, along with a certification of each GAWR, shall be supplied on a label affixed to the vehicle.

The fire apparatus manufacturer shall permanently affix a high-visibility label in a location visible to the driver while seated.

The label shall show the height of the completed unequipped fire apparatus in feet and inches (meters), the length of the completed fire apparatus in feet and inches (meters), and the GVWR in tons (metric tons).

Wording on the label shall indicate that the information shown was current when the apparatus was manufactured and that, if the overall height changes while the vehicle is in service, the fire department must revise that dimension on the plate.

			Equipment Allowance	
Apparatus Type	Equip. Storage Area	Apparatus Size	lb.	kg.
Special Service Fire Apparatus	Minimum of 120 cu ft (3.4 cu mt) of enclosed compartmentation.	40,001 lb to 50,000 lb (18,001 kg to 23,000 kg) GVWR	6,000	2,700

Honolulu Fire Department

Production Specifications – SVI #1090-1091

TESTING

ROAD TEST

Each apparatus shall be tested by the manufacturer before delivery to verify that it meets the following criteria;

Tests shall be conducted at a location and in a manner that does not violate local, state or provincial, or federal traffic laws. Tests shall be conducted on a dry, level, paved surface that is free of loose material, oil, or grease. Tests shall be conducted with the water and foam tanks full (water or product).

The apparatus shall accelerate from 0 to 35 mph (55 km/hr) within 25 seconds. The apparatus shall attain a speed of 50 mph (80 km/hr).

The auxiliary braking system, if so equipped, shall function as intended by the auxiliary braking system manufacturer.

The air service brakes shall bring the apparatus to a complete stop from a speed of 20 mph (32.2 km/hr) in a distance not exceeding 35 ft (10.7 m).

The hydraulic service brakes shall bring the apparatus to a complete stop from a speed of 30 mph (48.2 km/hr) in a distance not exceeding 88 ft (26.8 m).

LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST

The vehicles low voltage electrical system shall be tested and certified by the manufacturer. The certified test results shall be delivered with the completed vehicle. Tests shall be performed when the air temperature is between 0°F and 110°F (-18°C and 43°C).

TEST SEQUENCE

The following three (3) tests shall be performed in the order in which they appear below. Before each test, the batteries shall be fully charged until the voltage stabilizes at the voltage regulator set point and the lowest charge current is maintained for ten (10) minutes. Failure of any of these tests shall require a repeat of the sequence.

1. RESERVE CAPACITY TEST

The engine shall be started and kept running until the engine and engine compartment temperatures are stabilized at normal operating temperatures and the battery system is fully charged. The engine shall be shut off and the minimum continuous electrical load shall be activated for ten (10) minutes.

All electrical loads shall be turned off prior to attempting to restart the engine. The battery system shall then be capable of restarting the engine. Failure to restart the engine shall be considered a test failure of the battery system.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

2. ALTERNATOR PERFORMANCE TEST

TEST AT IDLE

The minimum continuous electrical load shall be activated with the engine running at idle speed. The engine temperature shall be stabilized at normal operating temperature. The battery system shall be tested to detect the presence of battery discharge current. The detection of battery discharge current shall be considered a test failure.

TEST AT FULL LOAD

The total continuous electrical load shall be activated with the engine running up to the engine manufacturer's governed speed. The test duration shall be a minimum of two (2) hours. Activation of the load management system shall be permitted during this test.

An alarm sounded by excessive battery discharge, as detected by the warning system required in 13.3.4, or a system voltage of less than 11.8 V dc for a 12 V nominal system, 23.6 V dc for a 24 V nominal system, or 35.4 V dc for a 42 V nominal system for more than 120 seconds shall be considered a test failure.

3. LOW VOLTAGE ALARM TEST

The following test shall be started with the engine off and the battery voltage at or above 12 V for a 12 V nominal system, 24 V for a 24 V nominal system or 36 V for a 42 V nominal system.

With the engine shut off, the total continuous electrical load shall be activated and shall continue to be applied until the excessive battery discharge alarm activates. The battery voltage shall be measured at the battery terminals.

The test shall be considered a failure if the alarm does not sound in less than 140 seconds after the voltage drops to 11.70 V for a 12 V nominal system, 23.4 V dc for a 24 V nominal system, or 35.1 V for a 42 V nominal system.

The battery system shall then be able to restart the engine. Failure to restart the engine shall be considered a test failure.

LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST

DOCUMENTATION

The manufacturer shall deliver the following with the fire apparatus:

- 1) Documentation of the electrical system performance tests
- 2) A written electrical load analysis, including the following:
 - a) The nameplate rating of the alternator
 - b) The alternator rating
 - c) Each of the component loads specified that make up the minimum continuous electrical load
 - d) Additional electrical loads that, when added to the minimum continuous electrical load, determine the total continuous electrical load
 - e) Each individual intermittent electrical load

Honolulu Fire Department

Production Specifications – SVI #1090-1091

WARRANTY

A full statement shall be provided of the warranties for the vehicle(s) being bid. Warranties should clearly describe the terms under which the vehicle manufacturer accepts responsibility for the cost to repair defects caused by faulty design, quality of work or material and for the applicable period of time after delivery.

Cost of repairs refers to all costs related thereto including, but not limited to, the cost of materials and the cost of labor.

The Body Manufacturer shall warrant all materials and accessories used on the vehicle(s), whether fabricated by manufacturer or purchased from an outside source and will deal directly with the Honolulu Fire Department on all warranty work.

GENERAL LIMITED WARRANTY - TWO (2) YEARS

The vehicle shall be free of defects in material and workmanship for a period of two (2) years or 36,000 miles (or 57,936 kilometers), whichever occurs first starting thirty (30) days after the original invoice date.

The Contractor must be the "single source" coordinator of all warranties on the vehicle.

LOW VOLTAGE ELECTRICAL WARRANTY - FIVE (5) YEARS

The vehicle low voltage electrical system shall be free of defects in material and workmanship for a period of five (5) years or 60,000 miles (or 96,561 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

STRUCTURAL WARRANTY - TEN (10) YEARS

The body shall be free of structural or design failure or workmanship for a period of ten (10) years, or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

UNDERCOAT WARRANTY

The body undercoating shall have a warranty provided by the manufacturer for the lifetime of the vehicle or twenty (20) years, whichever occurs first. The warranty shall be transferable between vehicle owners. Should the undercoating material applied to the underside of the body and wheel wells of the vehicle ever flake off, peel, chip or crack due to drying out, the damaged area shall be re-sprayed without charge to the vehicle owner.

PAINT LIMITED WARRANTY - TEN (10) YEARS

The body shall be free of bubbling or peeling as a result of a defect in the method of manufacture for a period of ten (10) years or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date. **Pro-rated warranties will not be acceptable.**

GRAPHICS LIMITED WARRANTY

The 3M graphics installation shall be warranted for a period of two (2) years. The 3M materials installed on completed vehicle shall be warranted for seven (7) years. The 3M Diamond grade film (if specified) shall be warranted for ten (10) years.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CONSTRUCTION PERIOD

The completed vehicle shall be delivered within four hundred (400) days after receipt of a purchase order or contract.

Contractor shall not be held liable for delays of chassis delivery due to accidents, strikes, floods or other events not subject to their control. Contractor shall provide immediate written notice to Honolulu Fire Department as to delays and to what extent these delays have in completing vehicle within the stated construction time period.

OVERALL HEIGHT REQUIREMENT

The overall height (OAH) of the vehicle shall be approximately 129" (10' - 9") from the ground. This measurement shall be taken on flat ground with the tires properly inflated, in the unloaded condition, at that highest point of the vehicle.

OVERALL LENGTH

The overall length (OAL) of the vehicle shall be approximately 368" (30' - 8").

OVERALL WIDTH

The overall width (OAW) of the body at drip rails shall be 102" (8' - 6"), and body shall be 100" (8' - 4").

Maximum width over mirrors is 118".

ANGLE OF APPROACH

The angle of approach for this vehicle shall not be less than eight (8) degrees when it is loaded to the estimated in-service weight as specified by the current edition of NFPA 1901.

ANGLE OF DEPARTURE

The angle of departure for this vehicle shall not be less than eight (8) degrees when it is loaded to the estimated in-service weight as specified by the current edition of NFPA 1901.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

DEMONSTRATION

The Contractor shall provide a delivery engineer to be present at time of delivery and demonstration for three (3) consecutive days. The delivery engineer will demonstrate all related components installed by Contractor and provide initial instruction to representatives of the Honolulu Fire Department regarding the operation, care and maintenance of the equipment supplied at Honolulu Fire Department location.

The delivery engineer shall set delivery and instruction schedule with the person appointed by Honolulu Fire Department.

After delivery of the apparatus, the Honolulu Fire Department shall be responsible for ongoing training of its personnel to proficiency regarding the proper and safe use of the apparatus and associated equipment.

OCEAN DELIVERY

The vehicle shall be delivered to the mainland port of Pasha Hawaii Transport Lines. The vehicle will be cleaned and detailed prior to loading for shipment to Honolulu, HI.

After delivery to port in Honolulu the selling Hawaii motor vehicle dealer will deliver the unit to Honolulu Fire Department with full tank of fuel, completely cleaned, and ready for service.

INSPECTION TRIPS

All required inspection trips shall be the financial responsibility of the Honolulu Fire Department, including but not limited to transportation, food and lodging.

DELIVERY AND DEMONSTRATION

The Contractor shall be responsible for the delivery of the completed unit to the Honolulu Fire Department's location. On initial delivery of the apparatus, the Contractor shall supply a qualified representative to demonstrate the apparatus and provide initial instruction to representatives of the Honolulu Fire Department regarding the operation, care and maintenance of the apparatus and equipment supplied at Honolulu Fire Department location.

The Delivery Engineer shall set delivery and instruction schedule with the person appointed by Honolulu Fire Department.

After delivery of the apparatus, the Honolulu Fire Department shall be responsible for ongoing training of its personnel to proficiency regarding the proper and safe use of the apparatus and associated equipment.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CAB CHASSIS SPECIFICATION

MODEL

The chassis shall be a Gladiator model. The cab and chassis shall include design considerations for multiple emergency vehicle applications, rapid transit and maneuverability. The chassis shall be manufactured for heavy duty service with the strength and capacity to support a fully laden apparatus, one hundred (100) percent of the time.

MODEL YEAR

The chassis shall have a vehicle identification number that reflects a 2019 model year.

COUNTRY OF SERVICE

The chassis shall be put in service in the country of United States of America (USA).

The chassis will meet applicable U.S.A. federal motor vehicle safety standards per CFR Title 49 Chapter V Part 571 as clarified in the incomplete vehicle book per CFR Title 49 Chapter V Part 568 Section 4 which accompanies each chassis. Spartan Chassis is not responsible for compliance to state, regional, or local regulations. Dealers should identify those regulations and order any necessary optional equipment from Spartan Chassis or their OEM needed to be in compliance with those regulations.

CAB AND CHASSIS LABELING LANGUAGE

The cab and chassis shall include the applicable caution, warning, and safety notice labels with text to be written in English.

APPARATUS TYPE

The apparatus shall be a rescue vehicle designed for emergency service use which shall include the functions of a multipurpose vehicle which primarily provides support services at emergency scenes.

VEHICLE TYPE

The chassis shall be manufactured for use as a straight truck type vehicle and designed for the installation of a permanently mounted apparatus behind the cab. The apparatus of the vehicle shall be supplied and installed by the apparatus manufacturer.

VEHICLE ANGLE OF APPROACH PACKAGE

The angle of approach of the apparatus shall be a minimum of 8.00 degrees.

NFPA1901 Angle of Approach definition:

“To determine the angle of approach, place a thin steel strip against the front of the tires where they touch the ground or stretch a tight string from one front tire to the other at the front where they touch the ground. Determine the lowest point (component or equipment) on the vehicle forward of the front tire that would make the smallest angle of approach. Hang a plumb bob from the lowest point and mark the point on the ground where the point of the plumb bob touches. Measure the vertical distance from the ground to the point where the plumb bob was hung (distance V). Measure the horizontal distance from the plumb bob point to the steel strip or string running from front tire to front tire (distance H). Divide the vertical distance by the horizontal distance. The ratio of V/H is the tangent of the angle of approach. If the ratio is known, the angle of approach can be determined from a table of trigonometric functions of angles or from a math calculator. The standard requires a minimum angle of approach of 8.00 degrees: since the tangent of 8.00 degrees is 0.1405, if V divided by H is 0.1405 or larger, the angle of approach is 8.00 degrees or greater.”

Honolulu Fire Department

Production Specifications – SVI #1090-1091

AXLE CONFIGURATION

The chassis shall feature a 4 x 2 axle configuration consisting of a single rear drive axle with a single front steer axle.

GROSS AXLE WEIGHT RATINGS FRONT

The front gross axle weight rating (GAWR) of the chassis shall be 21,500 pounds.

This front gross axle weight rating shall be adequate to carry the weight of the completed apparatus including all equipment and personnel.

GROSS AXLE WEIGHT RATINGS REAR

The rear gross axle weight rating (GAWR) of the chassis shall be 24,000 pounds.

This rear gross axle weight rating shall be adequate to carry the weight of the completed apparatus including all equipment and personnel.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CAB STYLE

The cab shall be a custom, fully enclosed, LFD model with a 20.00 inch raised roof over the driver, officer, and crew area, designed and built specifically for use as an emergency response vehicle by a company specializing in cab and chassis design for all emergency response applications. The cab shall be designed for heavy-duty service utilizing superior strength and capacity for the application of protecting the occupants of the vehicle. This style of cab shall offer up to ten (10) seating positions.

The cab shall incorporate a fully enclosed design with side wall roof supports, allowing for a spacious cab area with no partition between the front and rear sections of the cab. To provide a superior finish by reducing welds that fatigue cab metal; the roof, the rear wall and side wall panels shall be assembled using a combination of welds and proven industrial adhesives designed specifically for aluminum fabrication for construction.

The cab shall be constructed using multiple aluminum extrusions in conjunction with aluminum plate, which shall provide proven strength and the truest, flattest body surfaces ensuring less expensive paint repairs if needed. All aluminum welding shall be completed to the American Welding Society and ANSI D1.2-96 requirements for structural welding of aluminum.

All interior and exterior seams shall be sealed for optimum noise reduction and to provide the most favorable efficiency for heating and cooling retention.

The cab shall be constructed of 5052-H32 corrosion resistant aluminum plate. The cab shall incorporate tongue and groove fitted 6061-T6 0.13 & 0.19 inch thick aluminum extrusions for extreme duty situations. A single formed, one (1) piece extrusion shall be used for the “A” pillar, adding strength and rigidity to the cab as well as additional roll-over protection. The cab side walls and lower roof skin shall be 0.13 inch thick; the rear wall and raised roof skins shall be 0.09 inch thick; the front cab structure shall be 0.19 inch thick.

The exterior width of the cab shall be 99.40 inches wide with a minimum interior width of 91.00 inches. The overall cab length shall be 144.60 inches with 67.50 inches from the centerline of the front of the axle to the back of the cab.

The cab interior shall be designed to afford the maximum usable interior space and attention to ergonomics with hip and legroom while seated which exceeds industry standards. The crew cab floor shall be flat across the entire walking area for ease of movement inside the cab.

The cab shall offer an interior height of 57.50 inches from the front floor to the headliner and a rear floor to headliner height of 75.00 inches in the raised roof area, at a minimum. The cab shall offer an interior measurement at the floor level from the rear of the engine tunnel to the rear wall of the cab of 63.38 inches. All interior measurements shall include the area within the interior trimmed surfaces and not to any unfinished surface.

The cab shall include a driver and officer area with two (2) cab doors large enough for personnel in full firefighting gear. The front doors shall offer a clear opening of 40.25 inches wide X 53.50 inches high, from the cab floor to the top of the door opening. The cab shall also include a crew area with up to two (2) cab doors, also large enough for personnel in full firefighting gear. The rear doors shall offer a clear opening of 32.25 inches wide X 71.00 inches high, from the cab floor to the top of the door opening.

The cab shall incorporate a progressive two (2) step configuration from the ground to the cab floor at each door opening. The progressive steps are vertically staggered and extend the full width of each step well allowing personnel in full firefighting gear to enter and exit the cab easily and safely.

The first step for the driver and officer area shall measure approximately 11.50 inches deep X 31.13 inches wide. The intermediate step shall measure approximately 8.50 inches deep X 32.50 inches wide. The height from the first step to the intermediate step and the intermediate step to the cab floor shall not exceed 11.00 inches.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

The first step for the crew area shall measure approximately 11.50 inches deep X 20.44 inches wide. The intermediate step shall measure approximately 10.25 inches deep X 22.75 inches wide. The height from the first step to the intermediate step and the intermediate step to the cab floor shall not exceed 12.80 inches.

OCCUPANT PROTECTION

The vehicle shall include the Advanced Protection System™ (APS) which shall secure belted occupants and increase the survivable space within the cab. The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

The system components shall include:

- Driver steering wheel airbag
- Driver dual knee air bags (patent pending) with energy management mounting (patent pending) and officer knee airbag.
- Large driver, officer, and crew area side curtain airbags
- APS advanced seat belt system - retractor pre-tensioners tighten the seat belts around the occupants, securing the occupants in seats and load limiters play out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries
- Heavy truck Restraints Control Module (RCM) - receives inputs from the outboard sensors, selectively deploys APS systems, and records sensory inputs immediately before and during a detected qualifying event
- Integrated outboard crash sensors mounted at the perimeter of the vehicle - detects a qualifying front or side impact event and monitors and communicates vehicle status and real time diagnostics of all critical subsystems to the RCM
- Fault-indicating Supplemental Restraint System (SRS) light on the driver's instrument panel

Frontal impact protection shall be provided by the outboard sensors and the RCM. In a qualifying front impact event the outboard sensors provide inputs to the RCM. The RCM activates the steering wheel airbag, driver side dual knee airbags (patent pending), officer side knee airbag, and advanced seat belts for each occupant in the cab.

Rollover, side impact, and ejection mitigation shall be provided by the outboard sensors and the RCM. In qualifying rollover or side impact events the outboard sensors provide inputs to the RCM. The RCM activates the side curtain airbags and advanced seat belts for each occupant in the cab. The RCM measures roll angle, lateral acceleration, and roll rate to determine if a rollover event or side impact event is imminent or occurring.

In the event of a qualifying offset or other non-frontal impact, the RCM shall determine and intelligently deploy the front impact protection system, the side impact protection system, or both front and side impact protection systems based on the inputs received from the outboard crash sensors.

CAB FRONT FASCIA

The front cab fascia shall be constructed of 5052-H32 Marine Grade, 0.13 of an inch thick aluminum plate which shall be an integral part of the cab.

The cab fascia will encompass the entire front of the aluminum cab structure from the bottom of the windshield to the bottom of the cab and shall be the "Classic" design.

The front cab fascia shall include two (2) molded plastic modules on each side accommodating a total of up to four (4) Hi/Low beam headlights and two (2) turn signal lights or up to four (4) warning lights. A chrome plated molded plastic bezel shall be provided on each side around each set of four lamps.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

FRONT GRILLE

The front cab fascia shall include a classic box style, 304 stainless steel front grille. The grille shall measure 55.45 wide X 33.50 inches high X 1.50 inches deep. The upper portion of the grille shall be hinged to provide service access behind the grille. The grille shall include a minimum free air intake of 750.00 square inches.

CAB UNDERCOAT

There shall be a rubberized undercoating applied to the underside of the cab that provides abrasion protection, sound deadening and corrosion protection.

CAB SIDE DRIP RAIL

There shall be a drip rail along the top radius of each cab side. The drip rails shall help prevent water from the cab roof running down the cab side.

CAB PAINT EXTERIOR

The cab shall be painted prior to the installation of glass accessories and all other cab trim to ensure complete paint coverage and the maximum in corrosion protection of all metal surfaces.

All metal surfaces on the entire cab shall be ground by disc to remove any surface oxidation or surface debris which may hinder the paint adhesion. Once the surface is machine ground a high quality acid etching of base primer shall be applied. Upon the application of body fillers and their preparation, the cab shall be primed with a coating designed for corrosion resistance and surface paint adhesion. The maximum thickness of the primer coat shall be 2.00 mils.

The entire cab shall then be coated with an intermediate solid or epoxy surfacing agent that is designed to fill any minor surface defects, provide an adhesive bond between the primer and the paint and improve the color and gloss retention of the color. The finish to this procedure shall be a sanding of the cab with 360 grit paper followed by sealing the seams with SEM brand seam sealer.

The cab shall then be painted the specific color designated by the customer with an acrylic urethane type system designed to retain color and resist acid rain and most atmospheric chemicals found on the fire ground or emergency scene. The paint shall have a minimum thickness of 2.00 mils, followed by a clear top coat not to exceed 2.00 mils. The entire cab shall then be baked at 180 degrees for one (1) hour to speed the curing process of the coatings.

CAB PAINT MANUFACTURER

The cab shall be painted with PPG Industries paint.

CAB PAINT PRIMARY/LOWER COLOR

The primary/lower paint color shall be PPG FBCH 82663 ALT yellow.

CAB PAINT SECONDARY/UPPER COLOR

The secondary/upper paint color shall be PPG FBCH 2185 white.

CAB PAINT EXTERIOR BREAKLINE

The upper and lower paint shall meet at a breakline on the cab which is specifically detailed by the customer. This special paint breakline shall be represented in a photograph or drawing and shall be provided with the chassis order.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CAB PAINT PINSTRIPE

A 0.50 inch wide gold reflective tape with black borders shall be applied on the break line between the two different colored surfaces.

CAB PAINT WARRANTY

The cab and chassis shall be covered by a limited manufacturer paint warranty which shall be in effect for ten (10) years from the first owner's date of purchase or in service or the first 100,000 actual miles, whichever occurs first.

CAB PAINT INTERIOR

The visible interior cab structure surfaces shall feature a medium gray Spar-Liner spray on bedliner coating which shall mold to each surface of the cab interior. The Spar-Liner shall be environmentally friendly and chemically resistant.

CAB ENTRY DOORS

The cab shall include four (4) entry doors, two (2) front doors and two (2) crew doors designed for ease of entering and egress when outfitted with an SCBA. The doors shall be constructed of extruded aluminum with a nominal thickness of 0.13 inch. The exterior skins shall be constructed of 0.13 inch aluminum plate.

The doors shall include a double rolled style automotive rubber seal around the perimeter of each door frame and door edge which ensures a weather tight fit.

All door hinges shall be hidden within flush mounted cab doors for a pleasing smooth appearance and perfect fit along each side of the cab. Each door hinge shall be piano style with a 0.38 inch pin and shall be constructed of stainless steel.

CAB ENTRY DOOR TYPE

All cab entry doors shall be barrier clear design resulting in exposed lower cab steps. The doors shall provide approximately 32.00 inches of clearance from the ground to the bottom of the door so cab doors may be opened un-hindered by most obstacles encountered, such as guard rails along interstate highways.

Entry doors shall include Pollak mechanical plunger style switches for electrical component activation.

CAB INSULATION

The cab ceiling and walls shall include 1.00 inch thick foam insulation. The insulation shall act as a barrier absorbing noise as well as assisting in sustaining the desired climate within the cab interior.

LH MID EMS COMPARTMENT

The cab shall include an interior clear area provision for the side curtain crew airbag mounting to account for a compartment located in the middle of the wall to be installed by the body builder. The clear area shall extend from the cab 'B' pillar to the standard rear door location above the left side wheel well. The provision allows appropriate airbag selection for clear airbag deployment and adequate protection and ejection mitigation.

RH MID EMS COMPARTMENT

The cab shall include an interior clear area provision for the side curtain crew airbag mounting to account for a compartment located in the middle of the wall to be installed by the body builder. The clear area shall extend from the cab 'B' pillar to the standard rear door location above the right side wheel well. The provision allows appropriate airbag selection for clear airbag deployment and adequate protection and ejection mitigation.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

LH EXTERIOR REAR COMPARTMENT

The cab shall offer an exterior compartment on the left side of the cab behind the rear door. The compartment opening shall be 10.00 inches wide X 21.19 inches high. The compartment size shall be 11.34 inches wide X 21.19 inches high X 21.19 inches deep. The compartment shall have a 10.63 inch wide, 32.00 inch high and 1.50 inch thick hinged box pan style flush mount door with a DA finish inner panel and a bent D-ring slam latch. There shall be a switch to activate a light inside the compartment and the open compartment warning light in the cab in the event the door is left ajar. The compartment door shall include a gas shock to keep the door open when unlatched.

LEFT HAND EXTERIOR REAR COMPARTMENT LIGHTING

There shall be one (1) On-Scene brand Access LED strip light installed to illuminate the exterior rear compartment on the left side of the cab. The strip light shall be 10.00 inches long.

LH EXTERIOR COMPARTMENT INTERIOR FINISH

The interior of the left hand exterior compartment shall feature medium gray Spar-Liner spray on bedliner coating.

RH EXTERIOR REAR COMPARTMENT

The cab shall offer an exterior compartment on the right side of the cab behind the rear door. The compartment opening shall be 10.00 inches wide X 21.19 inches high. The compartment size shall be 11.34 inches wide X 21.19 inches high X 21.19 inches deep. The compartment shall have a 10.63 inch wide, 32.00 inch high and 1.50 inch thick hinged box pan style flush mount door with a DA finish inner panel and a bent D-ring slam latch. There shall be a switch to activate a light inside the compartment and the open compartment warning light in the cab in the event the door is left ajar. The compartment door shall include a gas shock to keep the door open when unlatched.

RIGHT HAND EXTERIOR REAR COMPARTMENT LIGHTING

There shall be one (1) On-Scene brand Access LED strip light installed to illuminate the exterior rear compartment on the right side of the cab. The strip light shall be 10.00 inches in length.

RH EXTERIOR COMPARTMENT INTERIOR FINISH

The interior of the right hand exterior compartment shall feature a medium gray Spar-Liner spray on bedliner coating.

REAR CAB WALL CUTOUT

The rear wall of the cab shall include a cut out which measures 24.00 inches wide X 72.50 inches tall to accommodate a walk through application.

CAB STRUCTURAL WARRANTY

Summary of Warranty Terms:

THE FOLLOWING IS SUMMARY OF WARRANTY TERMS FOR INFORMATION ONLY. THE ACTUAL LIMITED WARRANTY DOCUMENT, WHICH IS ATTACHED TO THIS OPTION, CONTAINS THE COMPLETE STATEMENT OF THE SPARTAN MOTORS USA LIMITED WARRANTY. SPARTAN'S RESPONSIBILITY IS TO BE ACCORDING TO THE TERMS OF THE COMPLETE LIMITED WARRANTY DOCUMENT.

The cab structure shall be warranted for a period of ten (10) years or one hundred thousand (100,000) miles which ever may occur first. The warranty period shall commence on the date the vehicle is delivered to the first end user.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CAB TEST INFORMATION

The cab shall have successfully completed the preload side impact, static roof load application and frontal impact without encroachment to the occupant survival space when tested in accordance with Section 4 of SAE J2420 COE Frontal Strength Evaluation Dynamic Loading Heavy Trucks, Section 5 of SAE J2422 Cab Roof Strength Evaluation Quasi –Static Loading Heavy Trucks and ECE R29 Uniform Provisions Concerning the Approval of Vehicles with regard to the Protection of the Occupants of the Cab of a Commercial Vehicles Annex 3 Paragraph 5.

The above tests have been witnessed by and attested to by an independent third party. The test results were recorded using cameras, high speed imagers, accelerometers and strain gauges. Documentation of the testing shall be provided upon request.

ELECTRICAL SYSTEM

The chassis shall include a single starting electrical system which shall include a 12 volt direct current multiplexing system, suppressed per SAE J551. The wiring shall be appropriate gauge cross link with 311 degree Fahrenheit insulation. All SAE wires in the chassis shall be color coded and shall include the circuit number and function where possible. The wiring shall be protected by 275 degree Fahrenheit minimum high temperature flame retardant loom. All nodes and sealed Deutsch connectors shall be waterproof.

MULTIPLEX DISPLAY

The multiplex electrical system shall include a Weldon Vista IV Touchscreen display which shall be located on the left side of the dash in the switch panel. The Touchscreen display shall feature a full color LCD screen. The display shall include a message bar displaying the time of day, and important messages requiring acknowledgement by the user. There shall be virtual controls for the on-board diagnostics. The display screen shall be video ready for back- up cameras, thermal cameras, and DVD. A DIN type input connector ready for GPS interfacing shall be incorporated into the back of the display.

The Touchscreen display shall measure approximately 6.25 inches wide x 3.38 inches in height. The display shall offer varying fonts and background colors. The display shall be fully programmable to the needs of the customer and shall offer virtually infinite flexibility for screen configuration options.

LOAD MANAGEMENT SYSTEM

The apparatus load management shall be performed by the included multiplex system. The multiplex system shall also feature the priority of sequences and shall shed electrical loads based on the priority list specifically programmed.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

DATA RECORDING SYSTEM

The chassis shall have a Weldon Vehicle Data Recorder (VDR) system installed. The system shall be designed to meet NFPA 1901 and shall be integrated with the Weldon Multiplex electrical system. The following information shall be recorded:

- Vehicle Speed
- Acceleration
- Deceleration
- Engine Speed
- Engine Throttle Position
- ABS Event
- Seat Occupied Status
- Seat Belt Status
- Master Optical Warning Device Switch Position
- Time
- Date

Each portion of the data shall be recorded at the specified intervals and stored for the specified length of time to meet NFPA 1901 guidelines and shall be retrievable by connecting a laptop computer to the VDR system.

ACCESSORY POWER

The electrical distribution panel shall include two (2) power studs. The studs shall be size #10 and each of the power studs shall be circuit protected with a fuse of the specified amperage. One (1) power stud shall be capable of carrying up to a 40 amp battery direct load. One (1) power stud shall be capable of carrying up to a 15 amp ignition switched load. The two (2) power studs shall share one (1) #10 ground stud. A 225 amp battery direct power and ground stud shall be provided and installed on the chassis near the left hand battery box for OEM body connections.

EXTERIOR ELECTRICAL TERMINAL COATING

All terminals exposed to the elements will be sprayed with a high visibility protective rubberized coating to prevent corrosion.

ENGINE

The chassis engine shall be a Cummins X15 engine. The X15 engine shall be an in-line six (6) cylinder, four cycle diesel powered engine. The engine shall offer a rating of 565 horse power at 1800 RPM and shall be governed at 2100 RPM. The torque rating shall feature 1850 foot pounds of torque at 1150 RPM with 912 cubic inches (14.9 liter) of displacement.

The X15 engine shall feature a VGT™ Turbocharger, a high pressure common rail fuel system, fully integrated electronic controls with an electronic governor, and shall be EPA certified to meet the 2017 emissions standards using cooled exhaust gas recirculation and selective catalytic reduction technology.

The engine shall include an engine mounted combination full flow/by-pass oil filter with replaceable spin on cartridge for use with the engine lubrication system. The engine shall include Citgo brand Citgard 500, or equivalent 15W40 CK-4 low ash engine oil which shall be utilized for proper engine lubrication.

A wiring harness shall be supplied ending at the back of the cab. The harness shall include a connector which shall allow an optional harness for the pump panel. The included circuits shall be provided for a tachometer, oil pressure, engine temperature, hand throttle, high idle and a PSG system. A circuit for J1939 data link shall also be provided at the back of the cab.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CAB ENGINE TUNNEL

The cab interior shall include an integrated engine tunnel constructed of 5052-H32 Marine Grade 0.19 of an inch thick aluminum alloy plate. The tunnel shall be a maximum of 46.50 inches wide X 29.00 inches high.

DIESEL PARTICULATE FILTER CONTROLS

There shall be two (2) controls for the diesel particulate filter located in the dash switch panel. One (1) control shall be for regeneration and one (1) control shall be for regeneration inhibit.

ENGINE PROGRAMMING HIGH IDLE SPEED

The engine high idle control shall maintain the engine idle at approximately 1250 RPM when engaged.

ENGINE HIGH IDLE CONTROL

The vehicle shall be equipped with an automatic high-idle speed control. It shall be pre-set so when activated, it will operate the engine at the appropriate RPM to increase alternator output. This device shall operate only when the master switch is activated and the transmission is in neutral with the parking brake set. The device shall disengage when the operator depresses the brake pedal, or the transmission is placed in gear, and shall be available to manually or automatically re-engage when the brake is released, or when the transmission is placed in neutral. There shall be an indicator on the Vista display and control screen for the high idle speed control.

ENGINE PROGRAMMING ROAD SPEED GOVERNOR

The engine shall include programming which will govern the top speed of the vehicle.

AUXILIARY ENGINE BRAKE

A provisional engine compression brake, for the six (6) cylinder engine shall be provided.

ELECTRONIC ENGINE OIL LEVEL INDICATOR

The engine oil shall be monitored electronically and shall send a signal to activate a warning in the instrument panel when levels fall below normal. The warning shall activate in a low oil situation upon turning on the master battery and ignition switches without the engine running.

FLUID FILLS

The front of the chassis shall accommodate fluid fill for the engine oil through the grille. This area shall also accommodate a check for the engine oil. The transmission, power steering, and coolant fluid fills and checks shall be under the cab. The windshield washer fill shall be accessible through the front left side mid step.

ENGINE DRAIN PLUG

The engine shall include an original equipment manufacturer installed oil drain plug.

ENGINE WARRANTY

The Cummins engine shall be warranted for a period of five (5) years or 100,000 miles, whichever occurs first.

ENGINE PROGRAMMING REMOTE THROTTLE

The engine ECM (Electronic Control Module) discreet wire remote throttle circuit shall be turned off for use with a J1939 based pump controller or when the discreet wire remote throttle controls are not required.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

ENGINE PROGRAMMING IDLE SPEED

The engine low idle speed will be programmed at 700 rpm.

ENGINE FAN DRIVE

The engine cooling system fan shall incorporate a thermostatically controlled, Horton clutched type fan drive.

When the clutched fan is disengaged it shall facilitate improved vehicle performance, cab heating in cold climates, and fuel economy. The fan clutch design shall be fail safe so that if the clutch drive fails the fan shall engage to prevent engine overheating due to the fan clutch failure.

ENGINE COOLING SYSTEM

There shall be a heavy-duty aluminum cooling system designed to meet the demands of the emergency response industry. The cooling system shall have the capacity to keep the engine properly cooled under all conditions of road and pumping operations. The cooling system shall be designed and tested to meet or exceed the requirements specified by the engine and transmission manufacturer and all EPA requirements. The complete cooling system shall be mounted to isolate the entire system from vibration or stress. The individual cores of the cooling system shall be mounted in a manner to allow expansion and contraction at various rates without inducing stress into the adjoining cores.

The cooling system shall be comprised of a charge air cooler to radiator serial flow package that provides the maximum cooling capacity for the specified engine as well as serviceability. The main components shall include a surge tank, a charge air cooler bolted to the front of the radiator, recirculation shields, a shroud, a fan, and required tubing.

The radiator shall be a down-flow design constructed with aluminum cores, plastic end tanks, and a steel frame. The radiator shall be equipped with a drain cock to drain the coolant for serviceability.

The cooling system shall include a one piece injected molded polymer fan with a three (3) piece fiberglass fan shroud.

The cooling system shall be equipped with a surge tank that is capable of removing entrained air from the system. The surge tank shall be equipped with a low coolant probe and rearward oriented sight glass to monitor the level of the coolant. The surge tank shall have a dual seal cap that meets the engine manufacturer's pressure requirements, and allows for expansion and recovery of coolant into a separate integral expansion chamber.

All radiator tubes shall be formed from aluminized steel tubing. Recirculation shields shall be installed where required to prevent heated air from reentering the cooling package and affecting performance.

The charge air cooler shall be a cross-flow design constructed completely of aluminum with cast tanks. All charge air cooler tubes shall be formed from aluminized steel tubing and installed with silicone hump hoses and stainless steel "constant torque" style clamps meeting the engine manufacturer's requirements.

The radiator and charge air cooler shall be removable through the bottom of the chassis.

ENGINE COOLING SYSTEM PROTECTION

The engine cooling system shall include a recirculation shield designed to act as a light duty skid plate below the radiator to provide additional protection for the engine cooling system from light impacts, stones, and road debris. The skid plate shall be painted to match the frame components.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

ENGINE COOLANT

The cooling package shall include Extended Life Coolant (ELC). The use of ELC provides longer intervals between coolant changes over standard coolants providing improved performance. The coolant shall contain a 50/50 mix of ethylene glycol and de-ionized water to keep the coolant from freezing to a temperature of -34 degrees Fahrenheit.

Proposals offering supplemental coolant additives (SCA) shall not be considered, as this is part of the extended life coolant makeup.

ENGINE COOLANT FILTER

An engine coolant filter with a shut-off valve for the inlet and outlet shall be installed on the chassis. The location of the filter shall allow for easy maintenance.

Proposals offering engines equipped with coolant filters shall be supplied with standard non-chemical type particulate filters.

ELECTRONIC COOLANT LEVEL INDICATOR

The instrument panel shall feature a low engine coolant indicator light which shall be located in the center of the instrument panel. An audible tone alarm shall also be provided to warn of a low coolant incident.

COOLANT HOSES

The engine cooling system hoses shall be Goodyear Hi-Miler Straight Radiator Hose where permitted, formed silicone adapters, and formed aluminized steel tubing. Charge air cooling system shall consist of reinforced silicone bellows or sleeve, and formed aluminized steel tubing.

Cab heating system shall be Goodyear Hi-Miler Blue Heater Hose.

All silicone hose and formed adapters shall be secured with stainless steel constant torque band clamps. All aluminized steel tubing connections shall be beaded.

Exhaust after treatment/DEF system plumbing shall be Spartan controlled.

ENGINE COOLANT OVERFLOW BOTTLE

A remote engine coolant overflow bottle shall be provided in the case of over filling the coolant system. The overflow bottle shall capture the expansion fluid or overfill rather than allow the fluid to drain on the ground. The overflow bottle provided on the cooling system shall only be a catch bottle and shall not return excess coolant back into the surge tank.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

ENGINE AIR INTAKE

The engine air intake system shall include an ember separator air intake filter which shall be located behind the right hand side headlamp. This filter ember separator shall be designed to protect the downstream air filter from embers, using a combination of unique flat and crimped metal screens packaged in a corrosion resistant heavy duty galvanized steel frame. This multilayered screen shall be design traps embers and allows them to burn out before passing through the pack.

The engine air intake system shall also include a stainless steel air cleaner mounted to the frame and located beneath the cab on the right side of the vehicle. The air cleaner shall utilize a replaceable filter element designed to prevent dust and debris from being ingested into the engine. The air cleaner housing and connections in the air intake system shall be designed to mitigate water intrusion into the system during severe weather conditions.

The air intake system shall also include a restriction indicator light in the warning light cluster on the instrument panel, which shall activate when the air cleaner element requires replacement.

AIR INTAKE PROTECTION

A heavy duty skid plate shall be supplied for the engine air intake system below the right front side of the cab. The skid plate shall measure 0.25 inch thick and provide protection for the air intake system from light impacts, stones, and road debris.

ENGINE EXHAUST SYSTEM

The exhaust system shall include an end-in end-out horizontally mounted single module after treatment device, downpipe from the charge air cooled turbo. The single module shall include four temperature sensors, diesel particulate filter (DPF), urea dosing module (UL2), and a selective catalytic reduction (SCR) catalyst to meet current EPA standards. The selective catalytic reduction catalyst utilizes a diesel exhaust fluid solution consisting of urea and purified water to convert NOx into nitrogen, water, and trace amounts of carbon dioxide. The solution shall be mixed and injected into the system through the between the DPF and SCR.

The system shall utilize 0.07 inch thick stainless steel exhaust tubing between the engine turbo and the DPF. Zero leak clamps seal all system joints between the turbo and DPF.

The single module after treatment through the end of the tailpipe shall be connected with zero leak clamps. The discharge shall terminate horizontally on the right side of the vehicle ahead of the rear tires.

The exhaust system after treatment module shall be mounted below the frame in the inboard position.

DIESEL EXHAUST FLUID TANK

The exhaust system shall include a molded cross linked polyethylene tank for Diesel Exhaust Fluid (DEF). The tank shall have a capacity of six (6) usable gallons and shall be mounted on the left hand side of the chassis frame behind the batteries below the frame.

The DEF tank shall be designed with capacity for expansion in case of fluid freezing. Engine coolant, which shall be thermostatically controlled, shall be run through lines in the tank to help prevent the DEF from freezing and to provide a means of thawing the fluid if it should become frozen.

The tank fill tube shall be routed under the rear of the cab with the fill neck and splash guard accessible in the top rear step. The backside of the access door shall include a label that states "DEF Fluid only – 6 Gallon Capacity."

Honolulu Fire Department

Production Specifications – SVI #1090-1091

ENGINE EXHAUST ACCESSORIES

An exhaust temperature mitigation device shall be shipped loose for installation by the body manufacturer on the vehicle. The temperature mitigation device shall lower the temperature of the exhaust by combining ambient air with the exhaust gasses at the exhaust outlet.

ENGINE EXHAUST WRAP

The exhaust tubing between the engine turbo and the diesel particulate filter (DPF) shall be wrapped with a thermal cover in order to retain the necessary heat for DPF regeneration. The exhaust wrap shall also help protect surrounding components from radiant heat which can be transferred from the exhaust.

TRANSMISSION

The drive train shall include an Allison model EVS 4000 torque converting, automatic transmission which shall include electronic controls and an output retarder. The transmission shall feature two (2) 10-bolt PTO pads located on the converter housing.

The transmission shall include two (2) internal oil filters which shall offer Castrol TranSynd™ synthetic TES 295 transmission fluid which shall be utilized in the lubrication of the EVS transmission. An electronic oil level sensor shall be included with the readout located in the shift selector.

The transmission gear ratios shall be:

1st	3.51:1
2nd	1.91:1
3rd	1.43:1
4th	1.00:1
5th	0.74:1
6th	0.64:1 (if applicable)
Rev	4.80:1

TRANSMISSION MODE PROGRAMMING

The transmission, upon start-up, will select a six (6) speed operation without the need to press the mode button.

TRANSMISSION FEATURE PROGRAMMING

The Allison Gen V-E transmission EVS group package number 127 shall contain the 227 vocational package in consideration of the duty of this apparatus for rescue. This package shall incorporate an automatic neutral with selector override. This feature commands the transmission to neutral when the park brake is applied, regardless of drive range requested on the shift selector. This requires re-selecting drive range to shift out of neutral for the override.

A transmission interface connector shall be provided in the cab. This package shall contain the following input/output circuits to the transmission control module. The Gen V-E transmission shall include prognostic diagnostic capabilities. These capabilities shall include the monitoring of the fluid life, filter change indication, and transmission clutch maintenance.

<u>Function ID</u>	<u>Description</u>	<u>Wire assignment</u>
Inputs		
C	PTO Request	143
F	Aux. Function Range Inhibit (Special)	101/142
Outputs		
G	PTO Enable Output (See Input Function C)	130
S	Neutral Indicator for PTO	145
	Signal Return	103

Honolulu Fire Department

Production Specifications – SVI #1090-1091

TRANSMISSION SHIFT SELECTOR

An Allison pressure sensitive range selector touch pad shall be provided and located to the right of the driver within clear view and easy reach. The shift selector shall have a graphical Vacuum Florescent Display (VFD) capable of displaying two lines of text. The shift selector shall provide mode indication and a prognostic indicator (wrench symbol) on the digital display. The prognostics monitor various operating parameters and shall alert you when a specific maintenance function is required.

ELECTRONIC TRANSMISSION OIL LEVEL INDICATOR

The transmission fluid shall be monitored electronically and shall send a signal to activate a warning in the instrument panel when levels fall below normal.

TRANSMISSION RETARDER CONTROL

An Allison transmission retarder control lever, model 29521372, shall be provided to vary the intensity of the output level. The seven (7) position lever shall have a graduated control, ranging from the off position to full on. The retarder shall be controlled via a virtual switch on the Vista display and control screen. The lever shall be mounted in the center switch panel. The lever shall be oriented so that down is off and up is full on. The activation of the retarder shall activate the brake lights and shall be inactive during pump mode.

TRANSMISSION RETARDER CAPACITY LEVEL

The transmission retarder shall be programmed so the maximum retardation shall be at the high capacity level.

TRANSMISSION PRE-SELECT WITH AUXILIARY BRAKE

When the auxiliary brake is engaged, the transmission shall automatically shift to second gear to decrease the rate of speed assisting the secondary braking system and slowing the vehicle.

TRANSMISSION COOLING SYSTEM

The transmission shall include a water to oil cooler system located in the cooling loop between the radiator and the engine. The transmission cooling system shall meet all transmission manufacturer requirements. The transmission cooling system shall feature continuous flow of engine bypass water to maintain uninterrupted transmission cooling.

TRANSMISSION DRAIN PLUG

The transmission shall include an original equipment manufacturer installed magnetic transmission fluid drain plug.

TRANSMISSION WARRANTY

The Allison EVS series transmission and cooling system shall be warranted for a period of five (5) years with unlimited mileage. Parts and labor shall be included in the warranty.

The cooling system performance warranty shall cover any transfer of fluid to the transmission and shall cover the entire transmission rebuild in the event of a cooler failure.

PTO LOCATION

The transmission shall have two (2) power take off (PTO) mounting locations, one (1) in the 8:00 o'clock position and one (1) in the 1:00 o'clock position.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

DRIVELINE

All drivelines shall be heavy duty metal tube and equipped with Spicer 1810 series universal joints. The shafts shall be dynamically balanced prior to installation to alleviate future vibration. In areas of the driveline where a slip shaft is required, the splined slip joint shall be coated with Glide Coat®.

FUEL FILTER/WATER SEPARATOR

The fuel system shall have a Racor S3238 fuel filter/water separator as a primary filter. The fuel filter shall have a drain valve and a see through cover to allow visual inspection of fuel and filter condition. The Racor S3238 shall be a 10 micron filter capable of handling a maximum flow rate of 150 gallons per hour.

A secondary fuel filter shall be included as approved by the engine manufacturer.

An instrument panel lamp and audible alarm which indicates when water is present in the fuel-water separator shall also be included.

FUEL LINES

The fuel system supply and return lines installed from the fuel tank to the engine shall be black textile braided lines which are reinforced with braided high tensile steel wire. The fuel lines shall be connected with reusable steel fittings.

FUEL SHUTOFF VALVE

A fuel shutoff valve shall be installed in the fuel draw line at the primary fuel filter to allow the fuel filter to be changed without loss of fuel to the fuel pump.

A second fuel shutoff valve shall be installed in the fuel draw line, near the fuel tank to allow maintenance to be performed with minimal loss of fuel.

ELECTRIC FUEL PRIMER

Integral to the engine assembly is an electric lift pump that serves the purpose of pre-filter fuel priming.

FUEL COOLER

An aluminum cross flow air to fuel cooler shall be provided to lower fuel temperature allowing the vehicle to operate at higher ambient temperatures. The fuel cooler shall be located above the fuel tank.

FUEL TANK

The fuel tank shall have a capacity of sixty-eight (68) gallons and shall measure 35.00 inches in width X 17.00 inches in height X 29.00 inches in length.

The baffled tank shall have a vent port to facilitate venting to the top of the fill neck for rapid filling without "blow-back" and a roll over ball check vent for temperature related fuel expansion and draw.

The tank is designed with dual draw tubes and sender flanges. The tank shall have 2.00 inch NPT fill ports for right or left hand fill. A 0.50 inch NPT drain plug shall be centered in the bottom of the tank.

The fuel tank shall be mounted below the frame, behind the rear axle. Two (2) three-piece strap hanger assemblies with "U" straps bolted midway on the fuel tank front and rear shall be utilized to allow the tank to be easily lowered and removed for service purposes. Rubber isolating pads shall be provided between the tank and the upper tank mounting brackets. Strap mounting studs through the rail, hidden behind the body shall not be acceptable.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

FUEL TANK MATERIAL AND FINISH

The fuel tank shall be constructed of 12 gauge aluminized steel. The exterior of the tank shall be powder coated black and then painted to match the frame components.

All powder coatings, primers and paint shall be compatible with all metals, pretreatments and primers used. The cross hatch adhesion test per ASTM D3359 Method B, results to be 5B minimum. The pencil hardness test per ASTM D3363 shall have a final post-curved pencil hardness of H-2H. The direct impact resistance test per ASTM D2794, results to be 5B minimum.

Any proposals offering painted fuel tanks with variations from the above process shall not be accepted. The film thickness of vendor supplied parts shall also be sufficient to meet the performance standards as stated above.

FUEL TANK STRAP MATERIAL

The fuel tank straps shall be constructed of #304 stainless steel. The fuel tank straps shall be powder coated black and then painted to match the frame components if possible.

FUEL TANK FILL PORT

The fuel tank fill ports shall be provided with two (2) left fill ports located one (1) in the forward position and one (1) in the middle position and the right fill port located in the middle position of the fuel tank.

FUEL TANK DRAIN PLUG

A 0.5 inch NPT magnetic drain plug shall be centered in the bottom of the fuel tank.

FRONT AXLE

The front axle shall be a Meritor Easy Steer Non drive front axle, model number MFS-20. The axle shall include a 3.74 inch drop and a 71.00 inch king pin intersection (KPI). The axle shall include a conventional style hub with a standard knuckle. The weight capacity for the axle shall be rated to 21,500 pounds FAWR.

FRONT AXLE WARRANTY

The front axle shall be warranted by Meritor for two (2) years with unlimited miles under the general service application. Details of the Meritor warranty are provided on the PDF document attached to this option.

FRONT WHEEL BEARING LUBRICATION

The front axle wheel bearings shall be lubricated with oil. The oil level can be visually checked via clear inspection windows in the front axle hubs.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

FRONT SHOCK ABSORBERS

Two (2) Bilstein inert, nitrogen gas filled shock absorbers shall be provided and installed as part of the front suspension system. The shocks shall be a monotubular design and fabricated using a special extrusion method, utilizing a single blank of steel without a welded seam, achieving an extremely tight peak-to-valley tolerance and maintains consistent wall thickness. The monotubular design shall provide superior strength while maximizing heat dissipation and shock life.

The ride afforded through the use of a gas shock is more consistent and shall not deteriorate with heat, the same way a conventional oil filled hydraulic shock would.

The Bilstein front shocks shall include a digressive working piston assembly allowing independent tuning of the compression and rebound damping forces to provide optimum ride and comfort without compromise. The working piston design shall feature fewer parts than most conventional twin tube and “road sensing” shock designs and shall contribute to the durability and long life of the Bilstein shock absorbers.

Proposals offering the use of conventional twin tube or “road sensing” designed shocks shall not be considered.

FRONT SUSPENSION

The front suspension shall include a ten (10) leaf spring pack in which the longest leaf measures 54.00 inch long and 4.00 inches wide and shall include a military double wrapped front eye. Both spring eyes shall have a case hardened threaded bushing installed with lubrication counter bore and lubrication land off cross bore with grease fitting. The spring capacity shall be rated at 21,500 pounds.

STEERING COLUMN/ WHEEL

The cab shall include a Douglas Autotech steering column which shall include a seven (7) position tilt, a 2.25 inch telescopic adjustment, and an 18.00 inch, four (4) spoke steering wheel located at the driver's position. The steering wheel shall be covered with black polyurethane foam padding.

The steering column shall contain a horn button, self-canceling turn signal switch, four-way hazard switch and headlamp dimmer switch.

ELECTRONIC POWER STEERING FLUID LEVEL INDICATOR

The power steering fluid shall be monitored electronically and shall send a signal to activate an audible alarm and visual warning in the instrument panel when fluid level falls below normal.

POWER STEERING PUMP

The hydraulic power steering pump shall be a TRW PS and shall be gear driven from the engine. The pump shall be a balanced, positive displacement, sliding vane type. The power steering system shall include an oil to air passive cooler.

FRONT AXLE CRAMP ANGLE

The chassis shall have a front axle cramp angle of 48-degrees to the left and 44-degrees to the right.

POWER STEERING GEAR

The power steering gear shall be a TRW model TAS 85 with an assist cylinder.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CHASSIS ALIGNMENT

The chassis frame rails shall be measured to insure the length is correct and cross checked to make sure they run parallel and are square to each other. The front and rear axles shall be laser aligned. The front tires and wheels shall be aligned and toe-in set on the front tires by the chassis manufacturer.

REAR AXLE

The rear axle shall be a Meritor model RS-23-186 single drive axle. The axle shall include precision forged, single reduction differential gearing, and shall have a fire service rated capacity of 24,000 pounds.

The axle shall be built of superior construction and quality components to provide the rugged dependability needed to stand up to the fire industry's demands. The axle shall include rectangular shaped, hot-formed housing with a standard wall thickness of 0.50 of an inch for extra strength and rigidity and a rigid differential case for high axle strength and reduced maintenance.

The axle shall have heavy-duty Hypoid gearing for longer life, greater strength and quieter operation. Industry-standard wheel ends for compatibility with both disc and drum brakes, and unitized oil seal technology to keep lubricant in and help prevent contaminant damage will be used.

REAR AXLE DIFFERENTIAL LUBRICATION

The rear axle differential shall be lubricated with oil.

REAR AXLE WARRANTY

The rear axle shall be warranted by Meritor for two (2) years with unlimited miles under the general service application. Details of the Meritor warranty are provided on the PDF document attached to this option.

REAR WHEEL BEARING LUBRICATION

The rear axle wheel bearings shall be lubricated with oil.

REAR AXLE DIFFERENTIAL CONTROL

A driver controlled differential lock shall be installed on the rear axle. This feature shall allow the main differential to be locked and unlocked when encountering poor road or highway conditions, where maximum traction is needed, for use at speeds no greater than 25 MPH. The differential lock shall be controlled by a locking rocker switch on the switch panel. The light on the switch shall illuminate with positive engagement of the differential control.

VEHICLE TOP SPEED

The top speed of the vehicle shall be approximately 65 MPH +/-2 MPH at governed engine RPM.

REAR SUSPENSION

The single rear axle shall feature a Reyco 102AR air suspension with a single air bag on each side attached to a tapered forged drop leaf spring with one adjustable and one fixed torque rod.

The suspension shall feature dual air height control valves which shall be installed to ensure equal frame height on both sides of the vehicle regardless of the load. The suspension shall also include two premium shock absorbers, one each side.

The rear suspension capacity shall be rated at 21,000 to 24,000 pounds to meet the rear axle rating selected.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

REAR SHOCK ABSORBERS

Shock absorbers shall be supplied by the suspension manufacturer and installed on the rear axle suspension.

SUSPENSION CONTROLS

The rear suspension shall incorporate a kneeling feature which, when activated, will deplete the air in the air bag to lower the rear of the chassis.

The kneeling system shall include a button on the Vista display and control screen to control the rear kneeling feature. The system shall include a park brake interlock and an instrument panel mounted red indicator lamp, which shall illuminate when the system is activated.

FRONT TIRE

The front tires shall be Michelin 425/65R-22.5 20PR "L" tubeless radial XZY3 mixed service tread.

The front tire stamped load capacity shall be 22,800 pounds per axle with a nominal speed rating of 65 miles per hour when properly inflated to 120 pounds per square inch.

The Michelin Intermittent Service Rating maximum load capacity shall be 24,396 pounds per axle with a maximum speed of 65 miles per hour when properly inflated to 120 pounds per square inch.

The Michelin Intermittent Service Rating maximum speed capacity shall be 22,800 pounds per axle with a speed rating of 75 miles per hour when properly inflated to 120 pounds per square inch.

The Michelin Intermittent Service Rating limits the operation of the emergency vehicle to no more than fifty (50) miles of continuous operation under maximum recommended payload, or without stopping for at least twenty (20) minutes. The emergency vehicle must reduce its speed to no more than 50 MPH after the first fifty (50) miles of travel.

REAR TIRE

The rear tires shall be Michelin 315/80R-22.5 20PR "L" tubeless radial XDN2 Grip all weather tread.

The rear tire stamped load capacity shall be 33,080 pounds per axle with a nominal speed rating of 75 miles per hour when properly inflated to 130 pounds per square inch.

The Michelin Intermittent Service Rating maximum load capacity shall be 35,396 pounds per axle with a maximum speed of 75 miles per hour when properly inflated to 130 pounds per square inch.

The Michelin Intermittent Service Rating maximum speed capacity shall match the nominal speed rating.

The Michelin Intermittent Service Rating limits the operation of the emergency vehicle to no more than fifty (50) miles of continuous operation under maximum recommended payload, or without stopping for at least twenty (20) minutes. The emergency vehicle must reduce its speed to no more than 50 MPH after the first fifty (50) miles of travel.

REAR AXLE RATIO

The rear axle ratio shall be 5.63:1.

SPARE TIRE FRONT QUANTITY

One (1) spare tire of the same manufacturer, size, and tread as the front tires shall be provided.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

SPARE TIRE FRONT

A 425/65R 22.5 Michelin XZY3 tire shall be provided on the spare front wheel. There shall be an electronic tire pressure indication transmitter inside the tire.

SPARE TIRE REAR QUANTITY

One (1) spare tire of the same manufacturer, size, and tread as the rear tires shall be provided.

SPARE TIRE REAR

A Michelin XDN2 Grip 315/80R 22.5 tire shall be provided on the spare wheel. There shall be an electronic tire pressure indication transmitter inside the tire.

TIRE PRESSURE INDICATOR

There shall be a SmarTire SmartWave electronic tire pressure indication transmitter inside each tire on the vehicle that shall transmit a signal to a display mounted in the dash panel. The display shall monitor if there is sufficient pressure in each specific tire. The system shall also warn the driver if a tire's temperature exceeds a safe operating temperature.

FRONT WHEEL

The front wheels shall be Alcoa hub piloted, 22.50 inch X 12.25 inch LvL One™ polished aluminum wheels. The hub piloted mounting system shall provide easy installation and shall include two-piece flange nuts. The wheels shall feature one-piece forged strength and shall include Alcoa's Dura-Bright® finish with XBR technology as an integral part of the wheel surface. Alcoa Dura-Bright® wheels keep their shine without polishing. Brake dust, grime and road debris are easily removed by simply cleaning the wheels with soap and water.

REAR WHEEL

The outer rear wheels shall be Alcoa hub piloted, heavy duty, 22.50 inch X 9.00 inch LvL One™ aluminum wheels with Alcoa Dura-Bright® wheel treatment with XBR® technology as an integral part of the wheel. The inner rear wheels shall be Alcoa hub piloted, 22.50 inch X 9.00 inch LvL One™ polished aluminum wheels. The hub piloted mounting system shall provide easy installation and shall include two-piece flange nuts.

BALANCE WHEELS AND TIRES

All of the wheels and tires, including any spare wheels and tire assemblies, shall be dynamically balanced.

WHEEL TRIM

The front wheels shall include stainless steel lug nut covers and stainless steel baby moons. The baby moons shall have cutouts for oil seal viewing when applicable.

The rear wheels shall include stainless steel lug nut covers and band mounted spring clip stainless steel high hats.

The lug nut covers, baby moons, and high hats shall be RealWheels® brand constructed of 304L grade, non-corrosive stainless steel with a mirror finish. Each wheel trim component shall meet D.O.T. certification.

SPARE WHEEL FRONT QUANTITY

One (1) spare wheel of the same manufacturer, size, and material as the front wheels shall be provided.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

SPARE WHEEL FRONT

An Alcoa brand aluminum Durabright 22.50 inch x 12.25 inch LVL One™ wheel shall be provided for the front spare.

SPARE WHEEL REAR QUANTITY

One (1) spare wheel of the same manufacturer, size, and material as the outer rear wheels shall be provided.

SPARE WHEEL REAR

An Alcoa brand aluminum Durabright 22.50 inch x 9.00 inch LVL One™ wheel shall be provided for the rear spare.

BRAKE SYSTEM

A rapid build-up air brake system shall be provided. The air brakes shall include a three (3) air tank, four (4) reservoir system with a total of 5352 cubic inch of air capacity. A floor mounted treadle valve shall be mounted inside the cab for graduated control of applying and releasing the brakes. An inversion valve shall be installed to provide controlled service brake application in the unlikely event of primary air supply loss. All air reservoirs provided on the chassis shall be labeled for identification.

The rear axle spring brakes shall automatically apply in any situation when the air pressure falls below 25 PSI and shall include a mechanical means for releasing the spring brakes when necessary. An audible alarm shall designate when the system air pressure is below 60 PSI.

A four (4) sensor, four (4) modulator Anti-lock Braking System (ABS) shall be installed on the front and rear axles in order to prevent the brakes from locking or skidding while braking during hard stops or on icy or wet surfaces. This in turn shall allow the driver to maintain steering control under heavy braking and in most instances, shorten the braking distance. The electronic monitoring system shall incorporate diagonal circuitry which shall monitor wheel speed during braking through a sensor and tone ring on each wheel. A dash mounted ABS lamp shall be provided to notify the driver of a system malfunction. The ABS system shall automatically disengage the auxiliary braking system device when required. The speedometer screen shall be capable of reporting all active defaults using PID/SID and FMI standards.

Additional safety shall be accommodated through Automatic Traction Control (ATC) which shall be installed on the single rear axle. The ATC system shall apply the ABS when the drive wheels lose traction. The system shall scale the electronic engine throttle back to prevent wheel spin while accelerating on ice or wet surfaces.

A virtual style switch shall be provided and properly labeled “mud/snow”. When the switch is pressed once, the system shall allow a momentary wheel slip to obtain traction under extreme mud and snow conditions. During this condition the ATC light shall blink continuously notifying the driver of activation. Pressing the switch again shall deactivate the mud/snow feature.

The Electronic Stability Control (ESC) unit is a functional extension of the electronic braking system. It is able to detect any skidding of the vehicle about its vertical axis as well as any rollover tendency. The control unit comprises an angular-speed sensor that measures the vehicle's motion about the vertical axis, caused, for instance, by cornering or by skidding on a slippery road surface. An acceleration sensor measures the vehicle's lateral acceleration. The Controller Area Network (CAN) bus provides information on the steering angle. On the basis of lateral acceleration and steering angle, an integrated microcontroller calculates a theoretical angular speed for the stable vehicle condition.

FRONT BRAKES

The front brakes shall be Meritor EX225 Disc Plus disc brakes with 17.00 inch vented rotors.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

REAR BRAKES

The rear brakes shall be Meritor 16.50 inch X 7.00 inch S-cam drum type.

PARK BRAKE

Upon application of the push-pull valve in the cab, the rear brakes will engage via mechanical spring force. This is accomplished by dual chamber rear brakes, satisfying the FMVSS parking brake requirements.

SUPPLEMENTAL BRAKE

A supplemental brake engagement shall be supplied that can only be engaged while the rear spring brakes are engaged. In addition to the mechanical rear brake engagement, the front service brakes shall also be engaged via air pressure, providing additional braking capability. Front service brake activation shall be accomplished with activation of the rear mechanical park brake valve.

PARK BRAKE CONTROL

A Meritor-Wabco manual hand control push-pull style valve shall operate the parking brake.

The parking brake actuation valve shall be mounted to the left side of the engine tunnel integrated into the transmission shift pod console within easy access of the driver.

REAR BRAKE SLACK ADJUSTERS

The rear brakes shall include Meritor automatic slack adjusters installed on the axle which features a simple, durable design offering reduced weight. The automatic slack adjusters shall feature a manual adjusting nut which cannot inadvertently be backed off and threaded grease fittings for easy serviceability.

REAR BRAKE DUST SHIELDS

The rear brakes shall be equipped with brake dust shields.

AIR DRYER

The brake system shall include an internal purge Bendix AD-IP fully self contained air dryer which shall not require an extra purge tank or additional valves. The AD-IP system shall include a spin-off desiccant filter with a 12-volt, 75-watt thermostatically controlled heating element. The air dryer shall feature 3.9 pounds of premium, high crush strength desiccant which shall be produced with a composition that shall be more effective and longer lasting than other desiccants. It shall also offer protection against contamination and desiccant breakdown. The air dryer shall be mounted behind the battery box on the left hand side.

FRONT BRAKE CHAMBERS

The front brakes shall be provided with MGM type 24 long stroke brake chambers.

REAR BRAKE CHAMBERS

The rear axle shall include TSE 30/30 brake chambers which shall convert the energy of compressed air into mechanical force and motion. This shall actuate the brake camshaft, which in turn shall operate the foundational brake mechanism forcing the brake shoes against the brake drum. The TSE Type 30 brake chamber shall offer a 30.00 square inch effective area.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

AIR COMPRESSOR

The air compressor provided for the engine shall be a Wabco® SS318 single cylinder pass-through drive type compressor which shall be capable of producing 18.7 CFM at 1200 engine RPMs. The air compressor shall feature a higher delivery efficiency translating to more air delivery per horsepower absorbed. The compressor shall include an aluminum cylinder head which shall improve cooling, reduce weight and decrease carbon formation. Superior piston and bore finishing technology shall reduce oil consumption and significantly increasing the system component life.

AIR GOVERNOR

An air governor shall be provided to control the cut-in and cut-out pressures of the engine mounted air compressor. The governor shall be calibrated to meet FMVSS requirements. The air governor shall be located on the air dryer bracket on the left frame rail behind the battery box.

AUXILIARY AIR RESERVOIR

One (1) auxiliary air reservoir with a 2084 cubic inch capacity shall be installed on the chassis to act as an additional reserve supply to the air system for air horn, air tool, or other non-service brake use. The reservoir shall be isolated with a 90 PSI pressure protection valve on the reservoir supply side to prevent depletion of the air to the air brake system.

MOISTURE EJECTORS

Automatic moisture ejectors with a manual drain provision shall be installed on all reservoirs of the air supply system.

AIR SUPPLY LINES

The air system on the chassis shall be plumbed with color coded reinforced nylon tubing air lines. The primary (rear) brake line shall be green, the secondary (front) brake line red, the parking brake line orange and the auxiliary (outlet) shall be blue.

Brass compression type fittings shall be used on the nylon tubing. All drop hoses shall be fiber reinforced neoprene covered hoses.

All nylon air tubing on the chassis shall be covered with high temperature plastic split loom.

AIR INLET CONNECTION

An air connection for the shoreline air inlet shall be supplied.

AIR INLET LOCATION

The air inlet shall be installed in the left hand side lower front step in the forward position.

AIR INLET/ OUTLET FITTING TYPE

The air connector supplied shall be a 0.25 inch size Tru-Flate Interchange style manual connection which is compatible with Milton 'T' style, Myers 0.25 inch Automotive style and Parker 0.25 inch 10 Series connectors.

AIR TANK SPACERS

There shall be spacers included with the air tank mounting. The spacers shall move the air tanks 1.50 inches inward towards the center of the chassis. This shall provide clearance between the air tanks and the frame for body U-bolt clearance.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

WHEELBASE

The chassis wheelbase shall be 185.50 inches.

REAR OVERHANG

The chassis rear overhang shall be 70.00 inches.

FRAME

The frame shall consist of double rails running parallel to each other with cross members forming a ladder style frame. The frame rails shall be formed in the shape of a "C" channel, with the outer rail measuring 10.25 inches high X 3.50 inches deep upper and lower flanges X 0.38 inches thick with an inner channel of 9.44 inches high X 3.13 inches deep and 0.38 inches thick. Each rail shall be constructed of 110,000 psi minimum yield high strength low alloy steel. Each double rail section shall be rated by a Resistance Bending Moment (RBM) minimum of 3,213,100 inch pounds and have a minimum section modulus of 29.21 cubic inches. The frame shall measure 35.00 inches in width.

Proposals calculating the frame strength using the "box method" shall not be considered.

Proposals including heat treated rails shall not be considered. Heat treating frame rails produces rails that are not uniform in their mechanical properties throughout the length of the rail. Rails made of high strength, low alloy steel are already at the required yield strength prior to forming the rail.

A minimum of seven (7) fully gusseted 0.25 inch thick cross members shall be installed. The inclusion of the body mounting, or bumper mounting shall not be considered as a cross member. The cross members shall be attached using zinc coated grade 8 fasteners. The bolt heads shall be flanged type, held in place by distorted thread flanged lock nuts. Each cross member shall be mounted to the frame rails utilizing a minimum of 0.25 inch thick gusset reinforcement plates at all corners balancing the area of force throughout the entire frame.

Any proposals not including additional reinforcement for each cross member shall not be considered.

All relief areas shall be cut in with a minimum 2.00 inch radius at intersection points with the edges ground to a smooth finish to prevent a stress concentration point.

The frame and cross members shall carry a lifetime warranty to the original purchaser. A copy of the frame warranty shall be made available upon request.

Proposals offering warranties for frames not including cross members shall not be considered.

FRAME WARRANTY

Summary of Warranty Terms:

THE FOLLOWING IS SUMMARY OF WARRANTY TERMS FOR INFORMATION ONLY. THE ACTUAL LIMITED WARRANTY DOCUMENT, WHICH IS ATTACHED TO THIS OPTION, CONTAINS THE COMPLETE STATEMENT OF THE SPARTAN MOTORS USA LIMITED WARRANTY. SPARTAN'S RESPONSIBILITY IS TO BE ACCORDING TO THE TERMS OF THE COMPLETE LIMITED WARRANTY DOCUMENT.

The frame and cross members shall carry a limited lifetime warranty to the original purchaser. The warranty period shall commence on the date the vehicle is delivered to the first end user.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

FRAME PAINT

The frame rails shall be hot dip galvanized prior to assembly and attachment of any components. The components that shall be galvanized shall include:

- Main frame “C” channel or channels

The frame parts which are not galvanized shall be powder coated prior to any attachment of components. Parts which shall be powder coated shall include but are not limited to:

- Steering gear bracket
- Front splayed rails and fish plates
- Bumper extensions
- Cross members
- Cross member gussets
- Fuel tank mounting brackets
- Fuel tank straps (unless material/finish is specified in 3130 subcat)
- Air tanks (unless color coded tanks are specified in 3205 subcat)
- Air tank mounting brackets
- Exhaust mounting brackets
- Air cleaner skid plate
- Radiator skid plate
- Battery supports, battery trays and battery covers

Other non-galvanized under carriage components which are received from the suppliers with coatings already applied shall include but are not limited to:

- Suspension components
- Front and rear axles

All powder coatings, primers and paint used on the non-galvanized components shall be compatible with all metals, pretreatments and primers used. The cross hatch adhesion test per ASTM D3359 shall not have a fail of more than ten (10) squares. The pencil hardness test per ASTM D3363 shall have a final post-curved pencil hardness of H-2H. The direct impact resistance test per ASTM D2794 shall have an impact resistance of 120.00 inches per pound at 2 mils.

The chassis under carriage components which are not galvanized shall be painted the primary/lower cab color. Paint shall be applied prior to airline and electrical wiring installation.

FRONT BUMPER

A one piece, two (2) rib wrap-around style, polished stainless steel front bumper shall be provided. The material shall be 10 gauge 304 stainless steel, 12" high and 104.50 inches wide.

FRONT BUMPER EXTENSION LENGTH

The front bumper shall be extended approximately 12.50 inches ahead of the cab.

FRONT BUMPER REINFORCEMENT

The bumper shall feature a 10.00 inch high 0.38 inch thick ASTM A36 steel plate mounted directly behind the bumper which shall offer additional strength.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

FRONT BUMPER APRON

The 12.50 inch extended front bumper shall include an apron constructed of 0.19 inch thick embossed aluminum tread plate.

The apron shall be installed between the bumper and the front face of the cab affixed using stainless steel bolts attaching the apron to the top bumper flange.

MECHANICAL SIREN

The front bumper shall include an electro mechanical Federal Q2B™ siren, which shall be streamlined, chrome-plated and shall produce 123 decibels of sound at 10.00 feet. The Q2B™ siren produces a distinctive warning sound that is recognizable at long distances. A unique clutch design provides a longer coast down sound while reducing the amp draw to 100 amps. The siren shall measure 10.50 inches wide X 10.00 inches high X 14.00 inches deep. The siren shall include mounting hardware designed to recess or flush mount.

MECHANICAL SIREN LOCATION

The siren shall be recess mounted in the center on the front fascia of the bumper between the frame rails. The siren shall be mounted completely behind the face of the bumper to protect the siren from damage.

AIR HORN

The chassis shall include two (2) Grover brand Stutter Tone air horns which shall measure 21.00 inches long with a 6.00 inch round flare. The air horns shall be trumpet style with a chrome finish.

AIR HORN LOCATION

The air horns shall be recess mounted in the front bumper face, one (1) on the right side of the bumper in the inboard position relative to the right hand frame rail and one (1) on the left side of the bumper in the inboard position relative to the left hand frame rail.

AIR HORN RESERVOIR

One (1) air reservoir, with a 2084 cubic inch capacity, shall be installed on the chassis to act as a supply tank for operating air horns. The reservoir shall be isolated with a 90 PSI pressure protection valve on the reservoir supply side to prevent depletion of the air to the air brake system.

ELECTRONIC SIREN SPEAKER

There shall be two (2) Whelen Engineering Inc. model SA314A, 100 watt speakers provided. Each speaker shall measure 6.40 inches tall X 6.17 inches wide X 3.14 inches deep. Each speaker shall have a natural cast aluminum finish and shall be installed using a polished custom Spartan grille.

ELECTRONIC SIREN SPEAKER LOCATION

The two (2) electronic siren speakers shall be located on the front bumper face outboard of the frame rails with one (1) on the right side and one (1) on the left side in the outboard positions.

FRONT BUMPER TOW HOOKS

Two (2) heavy duty chrome plated tow hooks shall be installed in the rearward position out of the approach angle area, bolted directly to the side of each chassis frame rail with grade 8 bolts.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

TOW FORK PROVISION

Two (2) heavy duty tubular steel towing forks shall be welded to the underside of the frame drop at the front of the chassis. The tubes shall be shaped like an upside down “U” to act as a designated hookup point to accept a tow bar from a service vehicle. The robust design shall allow a disabled vehicle to be lifted and towed without doing damage to the bumper or bumper mounted options.

CAB TILT SYSTEM

The entire cab shall be capable of tilting approximately 45-degrees to allow for easy maintenance of the engine and transmission. The cab tilt pump assembly shall be located on the right side of the chassis above the battery box.

The electric-over-hydraulic lift system shall include an ignition interlock and red cab lock down indicator lamp on the tilt control which shall illuminate when holding the “Down” button to indicate safe road operation.

It shall be necessary to activate the master battery switch and set the parking brake in order to tilt the cab. As a third precaution the ignition switch must be turned off to complete the cab tilt interlock safety circuit.

Two (2) spring-loaded hydraulic hold down hooks located outboard of the frame shall be installed to hold the cab securely to the frame. Once the hold-down hooks are set in place, it shall take the application of pressure from the hydraulic cab tilt lift pump to release the hooks.

Two (2) cab tilt cylinders shall be provided with velocity fuses in each cylinder port. The cab tilt pivots shall be 1.90 inch ball and be anchored to frame brackets with 1.25 inch diameter studs.

A steel safety channel assembly, painted safety yellow shall be installed on the right side cab lift cylinder to prevent accidental cab lowering. The safety channel assembly shall fall over the lift cylinder when the cab is in the fully tilted position. A cable release system shall also be provided to retract the safety channel assembly from the lift cylinder to allow the lowering of the cab.

CAB TILT AUXILIARY PUMP

A manual cab tilt pump module shall be attached to the cab tilt pump housing.

CAB TILT CONTROL RECEPTACLE

The cab tilt control cable shall include a receptacle which shall be temporarily located on the right hand chassis rail rear of the cab to provide a place to plug in the cab tilt remote control pendant. The tilt pump shall include 8.00 feet of cable with a six (6) pin Deutsch receptacle with a cap.

The remote control pendant shall include 20.00 feet of cable with a mating Deutsch connector. The remote control pendant shall be shipped loose with the chassis.

CAB TILT LOCK DOWN INDICATOR

The cab dash shall include a message located within the dual air pressure gauge which shall alert the driver when the cab is unlocked and ajar. The alert message shall cease to be displayed when the cab is in the fully lowered position and the hold down hooks are secured and locked to the cab mounts.

In addition to the alert message an audible alarm shall sound when the cab is unlocked and ajar and the parking brake is released.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CAB WINDSHIELD

The cab windshield shall have a surface area of 2969.88 square inches and be of a two (2) piece wraparound design for maximum visibility.

The glass utilized for the windshield shall include standard automotive tint. The left and right windshield shall be fully interchangeable thereby minimizing stocking and replacement costs.

Each windshield shall be installed using black self locking window rubber.

GLASS FRONT DOOR

The front cab doors shall include a window which is 27.00 inches in width X 26.00 inches in height. These windows shall have the capability to roll down completely into the door housing. This shall be accomplished using electric actuation. The left and right front door windows shall be controlled using a switch on each respective side inner door panel. The driver's door shall include a switch for each powered door window in the cab.

There shall be an irregular shaped fixed window which shall measure 2.50 inches wide at the top, 8.00 inches wide at the bottom X 26.00 inches in height, more commonly known as "cozy glass" ahead of the front door roll down windows.

The windows shall be mounted within the frame of the front doors trimmed with a black anodized ring on the exterior.

GLASS TINT FRONT DOOR

The windows located in the left and right front doors shall include a dark gray automotive tint which shall allow forty-five percent (45%) light transmittance. The dark tint shall aid in cab cooling and help protect passengers from radiant solar energy.

GLASS REAR DOOR RH

The rear right hand side crew door shall include a window which is 27.00 inches in width X 26.00 inches in height. The window shall be a powered type and shall be controlled by a switch on the inner door panel and on the driver's control panel.

GLASS TINT REAR DOOR RIGHT HAND

The window located in the right hand side rear window shall include a dark gray automotive tint which shall allow forty-five percent (45%) light transmittance. The dark tint shall aid in cab cooling and help protect passengers from radiant solar energy.

GLASS REAR DOOR LH

The rear left hand side crew door shall include a window which is 27.00 inches in width X 26.00 inches in height. The window shall be a powered type and shall be controlled by a switch on the inner door panel and on the driver's control panel.

GLASS TINT REAR DOOR LEFT HAND

The window located in the left hand side rear door shall include a dark gray automotive tint which shall allow forty-five percent (45%) light transmittance. The dark tint shall aid in cab cooling and help protect passengers from radiant solar energy.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

GLASS SIDE MID RH

The cab shall include a window on the right side behind the front and ahead of the crew doors which shall measure 16.00 inches wide X 26.00 inches high. This window shall be capable of sliding vertically within this space and shall be rectangular in shape. The window shall be mounted in a black anodized aluminum frame with lower drain slots. The glass utilized for the window shall include a green automotive tint unless otherwise noted.

GLASS TINT SIDE MID RIGHT HAND

The window located on the right hand side of the cab between the front and rear doors shall include a dark gray automotive tint which shall allow forty-five percent (45%) light transmittance. The dark tint shall aid in cab cooling and help protect passengers from radiant solar energy.

GLASS SIDE MID LH

The cab shall include a window on the left side behind the front door and ahead of the crew doors and above the wheel well which shall measure 16.00 inches wide X 26.00 inches high. This window shall be capable of sliding vertically within this space and shall be rectangular in shape. The window shall be mounted in a black anodized aluminum frame with lower drain slots. The glass utilized for this window shall include a green automotive tint unless otherwise noted.

GLASS TINT SIDE MID LEFT HAND

The window located on the left hand side of the cab between the front and rear doors shall include a dark gray automotive tint which shall allow forty-five percent (45%) light transmittance. The dark tint shall aid in cab cooling and help protect passengers from radiant solar energy.

GLASS UPPER SIDE REAR DOOR

Windows shall be provided in the upper portion of each rear door of the raised roof cab. Each window shall measure 27.00 inches wide X 14.00 inches high and be installed above the lower door window. The windows shall be rectangular in shape and fixed within this space. The windows shall be mounted using black self-locking window rubber.

GLASS TINT UPPER SIDE REAR DOOR

The window located in the upper section on the crew doors of the cab shall include a dark gray automotive tint which shall allow forty-five percent (45%) light transmittance. The dark tint shall aid in cab cooling and help protect passengers from radiant solar energy.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CLIMATE CONTROL

A ceiling mounted combination defroster and cabin heating and air conditioning system shall be located above the engine tunnel area. The system covers and plenums shall be of severe duty design made of aluminum which shall be coated with a customer specified interior paint. The design of the system's covers shall provide quick access to washable air intake filters as well as easy access to other serviceable items.

Six (6) adjustable louvers shall provide comfort for the front seat occupants and ten (10) adjustable louvers shall provide comfort for the rear crew occupants. The plenum shall be shortened to terminate in the mid crew area on cabs with 10.00 inch raised roofs and greater. This shortened plenum shall allow for the customer to utilize the upper rear center wall for compartmentation, equipment, or apparatus operations.

Separate front and rear blower motors shall be of brushless design and shall be controlled independently. It shall be capable of reducing the interior cabin air temperature from 122° F (+/- 3° F) to 80° F in thirty minutes with 50% relative humidity and full solar load as described in SAE J2646.

The system shall also provide heater pull up performance which meets or exceeds the performance requirements of SAE J1612 as well as defrost performance that meets or exceeds the performance requirements of SAE J381.

A gravity drain system shall be provided that is capable of evacuating condensate from the vehicle while on a slope of up to a 13% grade in any direction.

The air conditioning system plumbing shall be a mixture of custom bent zinc coated steel fittings and Aeroquip flexible hose with Aeroquip EZ-Clip fittings.

The overhead heater/defroster plumbing shall include an electronic flow control valve that re-directs hot coolant away from the evaporator, via a bypass loop, as the temperature control is moved toward the cold position.

Any component which needs to be accessed to perform system troubleshooting shall be accessible by one person using basic hand tools. Regularly serviced items shall be replaceable by one person using basic hand tools.

*****Spartan Motors Inc. recommends that the overall climate system performance be based off third-party testing in accordance to Society of Automotive Engineering standards as a complete system.***

Individual component level BTU ratings is not an accurate indicator of the performance capability of the completed system. System individual component BTU ratings:

- Air conditioning evaporator total BTU/HR: 82,000
- Air conditioning condenser total BTU/HR: 59,000
- Heater coil total BTU/HR: 98,000

Performance data specified is based on testing performed by an independent third-party test facility using a medium four-door 10" Raised roof Gladiator chassis equipped with an ISL engine.

CLIMATE CONTROL DRAIN

The climate control system shall include a gravity drain for water management. The gravity drain shall remove condensation from the air conditioning system without additional mechanical assistance.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CLIMATE CONTROL ACTIVATION

The heating, defrosting and air conditioning controls shall be located on the center dash panel in the lower left hand centered location, in a position which is easily accessible to the driver. The climate control shall be activated by a rotary switch.

HVAC OVERHEAD COVER PAINT

The overhead HVAC cover shall be painted with a multi-tone silver gray texture finish.

HEATER HOSE INSULATION

The heater hoses leading from the engine to the cab shall include a foam insulation wrap which runs the length of the hose improving heating in extreme cold climates. The heater hoses which shall be routed inside the cab shall not be insulated.

A/C CONDENSER LOCATION

A roof mounted A/C condenser shall be installed centered on the cab forward of the raised roof against the slope rise.

A/C COMPRESSOR

The air-conditioning compressor shall be a belt driven, engine mounted compressor. The compressor shall be compatible with R134-a refrigerant.

*****Spartan Motors Inc. recommends that the overall climate system performance be based off third-party testing in accordance to Society of Automotive Engineering standards as a complete system.***

Individual component level ratings are not an accurate indicator of the performance capability of the completed system.

Refrigerant Compressor displacement: 19.1 cubic inches per revolution.

UNDER CAB INSULATION

The underside of the cab tunnel surrounding the engine shall be lined with multi-layer insulation, engineered for application inside diesel engine compartments.

The insulation shall act as a noise barrier, absorbing noise thus keeping the decibel level in the cab well within NFPA recommendations. As an additional benefit, the insulation shall assist in sustaining the desired temperature within the cab interior.

The engine tunnel insulation shall measure approximately 0.75 inch thick including a vertically lapped polyester fiber layer, a 1.0 lb/ft² PVC barrier layer, an open cell foam layer, and a moisture and heat reflective foil facing reinforced with a woven fiberglass layer. The foil surface acts as protection against moisture and other contaminants. The insulation shall meet or exceed FMVSS 302 flammability test.

The insulation shall be cut precisely to fit each section and sealed for additional heat and sound deflection. The insulation shall be held in place by 3 mils of acrylic pressure sensitive adhesive and aluminum pins with hard hat, hold in place fastening heads. In addition, the insulation shall have a removable aluminum overlay installed to protect the insulation and assist in retaining the insulation tight against the engine tunnel surfaces.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

INTERIOR TRIM FLOOR

The floor of the cab shall be covered with a multi-layer mat consisting of 0.25 inch thick sound absorbing closed cell foam with a 0.06 inch thick non-slip vinyl surface with a pebble grain finish. The covering shall be held in place by a pressure sensitive adhesive and aluminum trim molding. All exposed seams shall be sealed with silicone caulk matching the color of the floor mat to reduce the chance of moisture and debris retention.

INTERIOR TRIM

The cab interior shall include trim on the front ceiling, rear crew ceiling, and the cab walls. It shall be easily removable to assist in maintenance. The trim shall be constructed of insulated vinyl over a hard board backing.

REAR WALL INTERIOR TRIM

The rear wall of the cab shall be trimmed with vinyl.

HEADER TRIM

The cab interior shall feature header trim over the driver and officer dash constructed of 5052-H32 Marine Grade, 0.13 inch thick aluminum.

TRIM CENTER DASH

The main center dash area shall be constructed of 5052-H32 Marine Grade, 0.13 inch thick aluminum plate. There shall be four (4) holes located on the top of the dash near each outer edge of the electrical access cover for ventilation. The center dash electrical access cover shall include a gas cylinder stay which shall hold the cover open during maintenance.

TRIM LH DASH

The left hand dash shall be constructed of 5052-H32 Marine Grade, 0.13 inch thick aluminum plate for a perfect fit around the instrument panel. For increased occupant protection the extreme duty left hand dash utilizes patent pending break away technology to reduce rigidity in the event of a frontal crash. The left hand dash shall offer lower vertical surface area to the left and right of the steering column to accommodate control panels.

TRIM RH DASH

The right hand dash shall be constructed of 5052-H32 Marine Grade, 0.13 of an inch thick aluminum plate and shall include a glove compartment with a hinged door and a Mobile Data Terminal (MDT) provision. The glove compartment size will measure 14.00 inches wide X 6.38 inches high X 5.88 inches deep. The MDT provision shall be provided above the glove compartment.

ENGINE TUNNEL TRIM

The cab engine tunnel shall be covered with a multi-layer mat consisting of 0.25 inch closed cell foam with a 0.06 inch thick non-slip vinyl surface with a pebble grain finish. The mat shall be held in place by pressure sensitive adhesive. The engine tunnel mat shall be trimmed with anodized aluminum stair nosing trim for an aesthetically pleasing appearance.

POWER POINT DASH MOUNT

The cab shall include two (2) dual universal serial bus (USB) charging receptacles in the cab dash switch panel to provide a power source for USB chargeable electrical equipment. Each dual USB receptacle shall include two ports and shall be capable of up to a 5 Volt 2.1 amp output. Port 1 is optimized for fast charging at 1 amp. Port 2 is optimized for fast charging up to 2.1 amps, when used individually. The receptacles shall be wired battery direct.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

STEP TRIM

Each cab entry door shall include a three step entry. The first step closest to the ground shall be constructed of SAE 304 stainless steel with indented perforations. The perforations shall allow water and other debris to flow through rather than becoming trapped within the stepping surface. The stainless steel material shall have a number 7 mirror finish. The lower step shall be mounted to a frame which is integral with the construction of the cab for rigidity and strength. The middle step shall be integral with the cab construction and shall be trimmed in 0.08 inch thick 3003-H22 embossed aluminum tread plate.

STEP TRIM KICKPLATE

The cab steps shall include a kick plate in the rise of each step. The risers shall be trimmed in 3003-H22 bright aluminum tread-plate which is 0.07 inch thick.

UNDER CAB ACCESS DOOR

The cab shall include an aluminum access door in the left crew step riser painted to match the cab interior paint with a push and turn latch. The under cab access door shall provide access to the diesel exhaust fluid fill.

INTERIOR DOOR TRIM

The interior trim on the doors of the cab shall consist of a two (2) piece panel constructed of SAE 304 stainless steel. The stainless steel shall have a brushed finish.

DOOR TRIM SCUFF PLATE

The trim along the door shall include a stainless steel scuff plate along the door jamb to prevent the chipping of paint should the seat belt buckle come in contact with the door jamb.

DOOR TRIM CUSTOMER NAMEPLATE

The interior door trim on the front doors shall include a customer nameplate which states the vehicle was custom built for their Department.

CAB DOOR TRIM REFLECTIVE

In accordance with the current standards of NFPA, the body builder shall provide 96.00 square inches of reflective material on the interior of each cab door.

INTERIOR GRAB HANDLE "A" PILLAR

There shall be two (2) rubber covered 11.00 inch grab handles installed inside the cab, one on each "A" post at the left and right door openings. The left handle shall be located 7.88 inches above the bottom of the door window opening and the right handle shall be located 2.88 inches above the bottom of the door window opening. The handles shall assist personnel in entering and exiting the cab.

INTERIOR GRAB HANDLE FRONT DOOR

Each front door shall include one (1) ergonomically contoured 9.00 inch cast aluminum handle mounted horizontally on the interior door panels. The handles shall feature a textured black powder coat finish to assist personnel entering and exiting the cab.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

INTERIOR GRAB HANDLE REAR DOOR

A black powder coated cast aluminum assist handle shall be provided on the inside of each rear crew door. A 30.00 inch long handle shall extend horizontally the width of the window just above the window sill. The handle shall assist personnel in exiting and entering the cab.

INTERIOR SOFT TRIM COLOR

The cab interior soft trim surfaces shall be black in color.

INTERIOR TRIM SUN VISOR

The header shall include two (2) sun visors, one each side forward of the driver and officer seating positions above the windshield. Each sun visor shall be constructed of Masonite and covered with padded vinyl trim.

In addition to the padded sun visors, two (2) 7.00 inches high X 18.00 inches wide impact resistant, transparent acrylic polycarbonate sun visors with a smoke gray tint shall be provided and installed on the header above the driver and officer.

The see thru visors are designed for maximum flexibility of positioning utilizing an arm with virtually unlimited adjustability with 13.50 inch long lateral travel of the tinted visor at the end of the arm which can be locked in place by a thumbscrew.

The visors are easily adjusted and can be placed into a chosen position with one hand. The sun visors will help protect vehicle occupants from solar glare without obscuring their vision.

INTERIOR FLOOR MAT COLOR

The cab interior floor mat shall be black in color.

HEADER TRIM INTERIOR PAINT

The metal surfaces in the header area shall feature a medium gray Spar-Liner spray on bedliner coating.

TRIM CENTER DASH INTERIOR PAINT

The entire center dash and any accessory pods attached to the dash shall feature a medium gray Spar-Liner spray on bedliner coating.

TRIM LEFT HAND DASH INTERIOR PAINT

The left hand dash shall feature a medium gray Spar-Liner spray on bedliner coating.

TRIM RIGHT HAND DASH INTERIOR PAINT

The right hand dash shall feature a medium gray Spar-Liner spray on bedliner coating.

DASH PANEL GROUP

The main center dash area shall include three (3) aluminum removable panels located one (1) to the right of the driver position, one (1) in the center of the dash and one (1) to the left of the officer position. The panels shall be coated with a black texture finish. The center panel shall be within comfortable reach of both the driver and officer.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

SWITCHES CENTER PANEL

The center dash panel shall include no rocker switches or legends.

SWITCHES LEFT PANEL

The left dash panel shall include six (6) switches. There shall be three (3) switches across the top of the panel and three (3) across the bottom of the panel. Two (2) of the top row of switches shall be rocker type and the left one (1) shall be the windshield wiper/washer control switch. The lower switches shall be a rocker type switch.

A rocker switch with a blank legend installed directly above shall be provided for any position not designated by a specific option. The non-designated switches shall be two-position, black switches with a green indicator light. Each blank switch legend can be custom engraved by the body manufacturer. All switch legends shall have backlighting provided.

SWITCHES RIGHT PANEL

The right dash panel shall include four (4) rocker switch positions in the lower right hand portion of the panel.

A rocker switch with a blank legend installed directly above shall be provided for any position without a switch and legend designated by a specific option. The non-specified switches shall be two-position, black switches with a green indicator light. Each blank switch legend can be custom engraved by the body manufacturer. All switch legends shall have backlighting provided.

SEAT BELT WARNING

A Weldon seat belt warning system, integrated with the Vehicle Data Recorder system, shall be installed for each seat within the cab. The system shall provide a visual warning indicator in the Vista display and control screen(s), an indicator light in the instrument panel, and an audible alarm.

The warning system shall activate when any seat is occupied with a minimum of 60 pounds, the corresponding seat belt remains unfastened, and the park brake is released. The warning system shall also activate when any seat is occupied, the corresponding seat belt was fastened in an incorrect sequence, and the park brake is released. Once activated, the visual indicators and audible alarm shall remain active until all occupied seats have the seat belts fastened.

SEAT MATERIAL

The USSC Valor seats shall include military grade high strength, wear resistant fabric made of durable ballistic polyester. A synthetic coating shall be bonded to the back side of the material to help protect the seats from UV rays and from being saturated or contaminated by fluids. The fabric shall include the integration VALORTech XD®, a proprietary antimicrobial agent, designed to resist toxicity and contaminants.

If applicable, Theatre style seats located in the cab shall be high strength, wear resistant fabric made of durable ballistic polyester. A PVC coating shall be bonded to the back side of the material to help protect the seats from UV rays and from being saturated or contaminated by fluids. Common trade names for this material are Imperial 1200 and Durawear.

SEAT COLOR

All seats supplied with the chassis shall be black in color. All seats shall include red seat belts.

SEAT BACK LOGO

The seat backs shall include the logo for the OEM body manufacturer. The logo shall be centered on the standard headrest of the seat back and on the left side of a split headrest.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

SEAT DRIVER

The driver's seat shall be a USSC Valor M Series Magnus air suspension. The four-way seat shall feature a 2.00 inches vertical travel air suspension and manual fore and aft adjustment with 9.40 inches of travel. The suspension control shall be located on the seat below the front of the cushion. The seat shall also feature integral springs to isolate shock.

The seat shall feature an all belts to seat (ABTS) style of safety restraint. The ABTS feature shall include a three-point shoulder harness with the lap belt and automatic retractor as an integral part of the seat assembly. The buckle portion of the seat belt shall extend from the seat base towards the driver position within easy reach of the occupant.

This model of seat shall have successfully completed the static load tests set forth by FMVSS 207/210. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity.

The materials used in construction of the seat shall also have successfully completed testing with regard to the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which dictates the allowable burning rate of materials in the occupant compartments of motor vehicles.

SEAT BACK DRIVER

The driver's seat shall include a standard seat back incorporating the all belts to seat feature (ABTS) as described above. The seat back shall recline up to 19-degrees.

SEAT MOUNTING DRIVER

The driver's seat shall be installed in an ergonomic position in relation to the cab dash.

OCCUPANT PROTECTION DRIVER

The driver's position shall be equipped with the Advanced Protection System™ (APS). The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

The driver's seating area APS shall include:

- Advanced seat belt system - retractor pre-tensioner tightens the seat belt around the driver, securing the occupant in the seat and the load limiter plays out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries.
- Large side curtain airbag - protects the driver's head, neck, and upper body from dangerous cab side surfaces and contact points with intrusive surfaces as a result of a collision as well as provides ejection mitigation protection to the driver in a qualifying event by covering the window and the upper portion of the door.
- Dual knee airbags (patent pending) with energy management mounting (patent pending) - protects the driver's lower body from dangerous surface contact injuries, acceleration injuries, and from intrusion as well as locks the lower body in place so the upper body shall be slowed by the load limiting seat belt.

Steering wheel airbag - protects the driver's head, neck, and upper torso from contact injuries, acceleration injuries, and contact points with intrusive surfaces as a result of a collision.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

SEAT OFFICER

The officer's seat shall be a USSC Valor M Series Magnus air suspension. The four-way seat shall feature a 2.00 inches vertical travel air suspension and manual fore and aft adjustment with 9.40 inches of travel. The suspension control shall be located on the seat below the front of the cushion. The seat shall also feature integral springs to isolate shock.

The seat shall feature an all belts to seat (ABTS) style of safety restraint. The ABTS feature shall include a three-point shoulder harness with the lap belt and automatic retractor as an integral part of the seat assembly. The buckle portion of the seat belt shall extend from the seat base towards the driver position within easy reach of the occupant.

The minimum vertical dimension from the seat H-point to the ceiling for this belted seating position shall be 37.00 inches measured with the seat suspension height adjusted to the upper limit of its travel.

This model of seat shall have successfully completed the static load tests by FMVSS 207/210. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity. The model of seats shall also have successfully completed the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which decides the burning rate of materials in the occupant compartments of motor vehicles.

SEAT BACK OFFICER

The officer's seat shall include a standard seat back incorporating the all belts to seat feature (ABTS) as described above. The seat back shall recline up to 19-degrees.

SEAT MOUNTING OFFICER

The officer's seat shall be installed in an ergonomic position in relation to the cab dash.

OCCUPANT PROTECTION OFFICER

The officer's position shall be equipped with the Advanced Protection System™ (APS). The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

The officer's seating area APS shall include:

- Advanced seat belt system - retractor pre-tensioner tightens the seat belt around the officer, securing the occupant in the seat and the load limiter plays out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries.
- Large side curtain airbag - protects the officer's head, neck, and upper body from dangerous cab side surfaces and contact points with intrusive surfaces as a result of a collision as well as provides ejection mitigation protection to the officer in a qualifying event by covering the window and the upper portion of the door.

Knee airbags - protects the officer's lower body from dangerous surface contact injuries, acceleration injuries, and from contact points with intrusive surfaces as a result of a collision as well as locks the lower body in place so the upper body shall be slowed by the load limiting seat belt.

SEAT BELT ORIENTATION CREW

The crew position seat belts shall follow the standard orientation which extends from the outboard shoulder extending to the inboard hip.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

SEAT FORWARD FACING OUTER LOCATION

The crew area shall include two (2) forward facing outboard seats, which include one (1) located next to the outer wall of the cab on the left side of the cab and one (1) located next to the outer wall on the right side of the cab.

SEAT CREW FORWARD FACING OUTER

The crew area shall include a seat in the forward facing outer position which shall be a USSC Valor ABTS Crew series. The seat shall feature an 18.00 inches wide padded seat cushion. The seat and cushion shall be spring load hinged and compact in design for additional room and shall remain in the stored position until occupied.

The seat shall feature an all belts to seat (ABTS) style of safety restraint. The ABTS feature shall include a three-point shoulder harness with the lap belt and automatic retractor as an integral part of the seat assembly. The buckle portion of the seat belt shall extend from the seat base towards the driver position within easy reach of the occupant.

The minimum vertical dimension from the seat H-point to the ceiling for each belted seating position shall be 35.00 inches.

This model of seat shall have successfully completed the static load tests by FMVSS 207/210. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity. The model of seats shall also have successfully completed the flammability of materials used in the occupant compartments of motor vehicles as outlined in FMVSS 302, of which decides the burning rate of materials in the occupant compartments of motor vehicles.

SEAT BACK FORWARD FACING OUTER

The seat back(s) in the forward facing outboard position shall be comprised of a standard seat back. The seat back shall feature an all belts to seat (ABTS) style safety restraint. The ABTS feature shall include a red, three-point shoulder harness with the lap belt and automatic retractor as an integral part of the seat assembly. The buckle portion of the seat belt shall extend from the seat base towards the driver position within easy reach of the occupant. The seat back shall feature a contoured, adjustable head rest.

SEAT MOUNTING FORWARD FACING OUTER

The forward facing outer seat shall be mounted in the furthest outboard position facing the front of the cab.

OCCUPANT PROTECTION FFO

The forward facing outer seat position(s) shall be equipped with the Advanced Protection System™ (APS). The APS shall selectively deploy integrated systems to protect against injuries in qualifying frontal impact, side impact, and rollover events. The increase in survivable space and security of the APS shall also provide ejection mitigation protection.

Each forward facing outer seating position APS shall include:

- APS advanced seatbelt system - retractor pre-tensioners tighten the seat belts around each occupant, securing the occupants in seats and load limiters play out some of the seat belt webbing to reduce seat belt to chest and torso force upon impact as well as mitigate head and neck injuries.

Side curtain airbag - protects each occupant's head, neck, and upper body from dangerous cab side surfaces and contact points with intrusive surfaces as a result of a collision as well as provides ejection mitigation protection to each occupant in a qualifying event by covering the windows and walls adjacent to each seating position with an airbag custom designed for each cab configuration.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

SEAT FRAME FORWARD FACING

The forward facing outboard seating positions shall include individual enclosed seat frames for each position located and installed at the outer rear wall positions. The seat frames shall measure 21.81 inches wide X 12.38 inches high X 22.00 inches deep. The seat frames shall be constructed of Marine Grade 5052-H32 0.19 inch thick aluminum plate. The seat frames shall be painted with the same color as the remaining interior.

SEAT FRAME FORWARD FACING STORAGE ACCESS

There shall be two (2) access points to the storage area centered on the front of the seat frame. Each access point shall be covered by a hinged door to allow access for storage in the seat box.

CAB FRONT UNDERSEAT STORAGE ACCESS

The left and right under seat storage areas shall have a solid aluminum hinged door with non-locking latch.

SEAT COMPARTMENT DOOR FINISH

All underseat storage compartment access doors shall feature a medium gray Spar-Liner spray on bedliner coating.

WINDSHIELD WIPER SYSTEM

The cab shall include a dual arm wiper system which shall clear the windshield of water, ice and debris. There shall be two (2) windshield wipers; each shall be affixed to a radial arm. The wiper motor shall be activated by an intermittent wiper control located within easy reach of the driver's position.

ELECTRONIC WINDSHIELD FLUID LEVEL INDICATOR

The windshield washer fluid level shall be monitored electronically. When the washer fluid level becomes low the yellow "Check Message Center" indicator light on the instrument panel shall illuminate and the message center in the dual air pressure gauge shall display a "Check Washer Fluid Level" message.

CAB DOOR HARDWARE

The cab entry doors shall be equipped with exterior pull handles, suitable for use while wearing firefighter gloves. The handles shall be made of aluminum with a chrome plated finish.

The interior exit door handles shall be flush paddle type with a black finish, which are incorporated into the upper door panel.

All cab entry doors shall include locks which are keyed alike. The door locks shall be designed to prevent accidental lockout.

The exterior pull handles shall include a scuff plate behind the handle constructed of polished stainless steel to help protect the cab finish.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

DOOR LOCKS

The cab entry doors shall include a Controller Area Network (CAN) based electronic door lock system which shall include two (2) external keypads, one (1) located on the left side next to the front grab handle and one (1) on the right side next to the front grab handle. There shall be one (1) red rocker switch provided on the inside of each front cab entry door to actuate the cab door locks. Each door lock may also be manually actuated from the inside of the cab by means of a red knob located on the paddle handle of the respective door. The electronic door lock system shall include four (4) key fobs for actuation with buttons for cab entry door locks and for compartment door locks.

When the doors are unlocked using the external keypad or the key fobs the interior dome lights shall illuminate and remain on for a period of twenty (20) seconds. The interior dome safety feature shall require the interior lighting power to be battery direct.

Wiring shall also be provided for up to four (4) exterior cab compartments and up to four (4) body compartments.

DOOR LOCK LH REAR CAB COMPARTMENT

The left hand side rear compartment shall feature a power door lock actuator.

DOOR LOCK RH REAR CAB COMPARTMENT

The right hand side rear compartment shall feature a power door lock actuator.

GRAB HANDLES

The cab shall include one (1) 24.00 inch knurled, anti-slip, one-piece exterior assist handle behind each cab door. The grab handle shall be made of SAE 304 stainless steel and be 1.25 inch diameter to enable non-slip assistance with a gloved hand.

POWER DOOR LOCK COMPARTMENT ACTIVATION

The power door lock feature shall include activation for exterior compartment door locks through the key fob, keypads and through a virtual switch on the multiplex display.

REARVIEW MIRRORS

Velvac West Coast style mirrors model 708211 shall be provided and installed on the driver's and officer's doors. The mirrors shall be mounted to the cab doors with tubular stainless steel swing away arms and the mirror heads shall be center mounted on the arms to provide rigid mounting to reduce vibration.

The mirror heads shall measure 8.00 inches wide X 16.00 inches high. The flat mirrors shall be heated and remote controlled with horizontal actuation. The mirror control switches shall be located on the driver's side dash panel with "LEFT MIRROR" and "RIGHT MIRROR" placards for identification. Manually adjustable convex mirrors which are 6.50 inches wide x 6.00 inches high shall be provided below the flat mirrors. Both mirrors shall have a Deutsch connector to allow for easy removal.

REARVIEW MIRROR HEAT SWITCH

The heat for the rearview mirrors shall be controlled through a rocker switch on the dash in the switch panel.

CAB FENDER

Full width wheel well liners shall be installed on the extruded cab to limit road splash and enable easier cleaning. Each two-piece liner shall consist of an inner liner 16.00 inches wide made of aluminum and an outer fenderette 3.50 inches wide made of SAE 304 polished stainless steel.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

MUD FLAPS FRONT

The front wheel wells shall have mud flaps installed on them. The mud flaps shall extend from the outer edge of the wheel well to the inner edge of the wheel well to provide additional protection from road spray.

CAB EXTERIOR FRONT & SIDE EMBLEMS

The cab shall include three (3) Spartan emblems and two (2) Advanced Protection System shield emblems. The emblems shall be included in the cab shipped loose components for installation by the body builder.

IGNITION

A master battery system with a keyless start ignition system shall be provided. Each system shall be controlled by a one-quarter turn Cole Hersee switch, both of which shall be mounted to the left of the steering wheel on the dash. A chrome push type starter button shall be provided adjacent to the master battery and ignition switches.

Each switch shall illuminate a green LED indicator light on the dash when the respective switch is placed in the "ON" position.

The starter button shall only operate when both the master battery and ignition switches are in the "ON" position.

BATTERY

The single start electrical system shall include six (6) Harris BCI 31 925 CCA batteries with a 210 minute reserve capacity and 4/0 welding type dual path starter cables per SAE J541.

BATTERY TRAY

The batteries shall be installed within two (2) steel battery trays located on the left side and right side of the chassis, securely bolted to the frame rails. The battery trays shall be coated with the same material as the frame.

The battery trays shall include drain holes in the bottom for sufficient drainage of water. A durable, non-conducting, interlocking mat made by Dri-Dek shall be installed in the bottom of the trays to allow for air flow and help prevent moisture build up. The batteries shall be held in place by non-conducting phenolic resin hold down boards.

BATTERY BOX COVER

Each battery box shall include a steel cover which protects the top of the batteries. Each cover shall be coated the same as the frame and shall include flush latches which shall keep the cover secure as well as a black powder coated handle for convenience when opening.

BATTERY CABLE

The starting system shall include cables which shall be protected by 275 degree F. minimum high temperature flame retardant loom, sealed at the ends with heat shrink and sealant.

BATTERY JUMPER STUD

The starting system shall include battery jumper studs. These studs shall be located in the forward most portion of the driver's side lower step. The studs shall allow the vehicle to be jump started, charged, or the cab to be raised in an emergency in the event of battery failure.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

ALTERNATOR

The charging system shall include a 300 amp Delco Remy 40SI 12 volt alternator. The alternator shall include a self-exciting integral regulator.

STARTER MOTOR

The single start electrical system shall include a Delco brand starter motor.

ELECTRICAL INLET LOCATION

An electrical inlet shall be installed on the left hand side of cab over the wheel well in the forward position rear of the grab handle and above the door entry key pad if applicable.

ELECTRICAL INLET

A Kussmaul 30 amp super auto-eject electrical receptacle shall be supplied. It shall automatically eject the plug when the starter button is depressed.

A single item or an addition of multiple items must not exceed the rating of the electric inlet that it's connected to.

Amp Draw Reference List:

Kussmaul 1000 Charger - 3.5 Amps
Kussmaul 1200 Charger - 10 Amps
Kussmaul 35/10 Charger - 10 Amps
1000W Engine Heater - 8.33 Amps
1500W Engine Heater - 12.5 Amps
120V Air Compressor - 4.2 Amps

ELECTRICAL INLET CONNECTION

The electrical inlet shall be pre-wired.

ELECTRICAL INLET COLOR

The electrical inlet connection shall include a yellow cover.

HEADLIGHTS

The cab front shall include four (4) rectangular halogen headlamps with separate high and low beams mounted in bright chrome bezels.

FRONT TURN SIGNALS

The front fascia shall include two (2) Whelen model 600 4.00 inches X 6.00 inches programmable amber LED turn signals which shall be installed in an outboard position within the front fascia chrome bezel.

HEADLIGHT LOCATION

The headlights shall be located on the front fascia of the cab directly below the front warning lights.

SIDE TURN/MARKER LIGHTS

The sides of the cab shall include two (2) LED round side marker lights which shall be provided just behind the front cab radius corners.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

MARKER AND ICC LIGHTS

In accordance with FMVSS, there shall be five (5) LED cab marker lamps designating identification, center and clearance provided. These lights shall be installed on the face of the cab within full view of other vehicles from ground level.

HEADLIGHT AND MARKER LIGHT ACTIVATION

The headlights and marker lights shall be controlled via a virtual button on the Vista display. There shall be a virtual dimmer control on the Vista display to adjust the brightness of the dash lights. The headlamps shall be equipped with the "Daytime Running" light feature, which shall illuminate the headlights to 80% brilliance when the battery master switch is in the "On" position and the parking brake is released.

GROUND LIGHTS

Each door shall include a Tecniq T44 LED ground light mounted to the underside of the cab step below each door. The lights shall include a polycarbonate lens, a housing which is vibration welded and LEDs which shall be shock mounted for extended life. The ground lighting shall be activated by the opening of the door on the respective cab side as well as through a virtual button on the Vista display and control screen.

LOWER CAB STEP LIGHTS

The middle step located at each door shall include a recess mounted 4.00 inch round LED light which shall activate with the opening of the respective door.

INTERMEDIATE STEP LIGHTS

The intermediate step well area at each door shall include an LED light within a chrome housing. The Egress step lights shall provide visibility to the step well area for the first step exiting the vehicle. The Egress step lights shall activate with Entry step lighting.

ENGINE COMPARTMENT LIGHT

There shall be two (2) LED NFPA compliant lights mounted under the engine tunnel for area work lighting on the engine. The lights shall include a polycarbonate lens, a housing which is vibration welded and a bulb which shall be shock mounted for extended life. The lights shall activate automatically when the cab is tilted.

LIGHTBAR PROVISION

The cab shall be pre-wired for a light bar. The wiring shall be routed to a six (6) post junction block located on the left hand side above the headliner for the light bar. The light bar shall be provided and installed by the body manufacturer.

LIGHTBAR SWITCH

The light bar shall be controlled by a virtual button on the Vista display and control screen. This button shall be clearly labeled for identification.

FRONT SCENE LIGHTS

The front of the cab shall include one (1) HiViz model FireTech FT-B-72 LED scene light installed on the brow of the cab.

The housing shall be powder coated white.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

FRONT SCENE LIGHTS ACTIVATION

The front scene lighting shall be activated by individual rocker switches for each of the three (3) separate scene lighting circuits. Each circuit shall be activated independently and shall include rocker switches labeled “Front Scene”, “Front Flood”, and “Front Spotlight”.

FRONT SCENE LIGHT LOCATION

There shall be one (1) scene light mounted center on the front brow of the cab.

INTERIOR OVERHEAD LIGHTS

The cab shall include a two-section, red and clear Weldon LED dome lamp located over each door. The dome lamps shall be rectangular in shape and shall measure approximately 7.00 inches in length X 3.00 inches in width with a black colored bezel. The clear portion of each lamp shall be activated by opening the respective door and via the multiplex display and both the red and clear portion can be activated by individual push lenses on each lamp.

An additional incandescent three (3) light module with dual map lights shall be located over the engine tunnel which can be activated by individual switches on the lamp.

DO NOT MOVE APPARATUS LIGHT

The front headliner of the cab shall include a flashing red Whelen Ion LED light clearly labeled "Do Not Move Apparatus". In addition to the flashing red light, an audible alarm shall be included which shall sound while the light is activated.

The flashing red light shall be located centered left to right for greatest visibility.

The light and alarm shall be interlocked for activation when either a cab door is not firmly closed or an apparatus compartment door is not closed, and the parking brake is released.

MASTER WARNING SWITCH

A master switch shall be included, as a virtual button on the Vista display and control screen which shall be labeled “E Master” for identification. The button shall feature control over all devices wired through it. Any warning device switches left in the “ON” position when the master switch is activated shall automatically power up.

INBOARD FRONT WARNING LIGHTS

The cab front fascia shall include two (2) Whelen C6 SurfaceMax™ series Super LED front warning lights in the left and right inboard positions. The lights shall feature multiple flash patterns including steady burn for solid colors and multiple flash patterns for split colors. The lights shall be mounted to the front fascia of the cab within a chrome bezel.

INBOARD FRONT WARNING LIGHTS COLOR

The warning lights mounted on the cab front fascia in the inboard positions shall be red with a clear lens.

FRONT WARNING SWITCH

The front warning lights shall be controlled through a virtual control on the Vista display and control screen. This switch shall be clearly labeled for identification.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

INTERSECTION WARNING LIGHTS

The chassis shall include two (2) Whelen C6 SurfaceMax series Super LED intersection warning lights, one (1) each side. The lights shall feature multiple flash patterns including steady burn for solid colors and multiple flash patterns for split colors.

INTERSECTION WARNING LIGHTS COLOR

The intersection lights shall be red with a clear lens.

INTERSECTION WARNING LIGHTS LOCATION

The intersection lights shall be mounted on the side of the bumper in the rearward position.

SIDE WARNING LIGHTS

The cab sides shall include two (2) Whelen C6 SurfaceMax series Super LED warning lights, one (1) on each side. The lights shall feature multiple flash patterns including steady burn. The lights shall be mounted to the sides of the cab within a chrome bezel.

SIDE WARNING LIGHTS COLOR

The warning lights located on the side of the cab shall be red with clear lens.

SIDE WARNING LIGHTS LOCATION

The warning lights on the side of the cab shall be mounted over the front wheel well forward from the center of the front axle.

SIDE AND INTERSECTION WARNING SWITCH

The side warning lights shall be controlled through a virtual button on the Vista display and control screen. This button shall be clearly labeled for identification.

HORN BUTTON SELECTOR SWITCH

A virtual button on the Vista display and control screen shall be provided to allow control of either the electric horn or the air horn from the steering wheel horn button. The electric horn shall sound by default when the selector switch is in either position to meet FMCSA requirements.

AIR HORN ACTIVATION

The air horn activation shall be accomplished by the steering wheel horn button for the driver and a right hand side Linemaster model SP491-S81 foot switch for the officer. An air horn activation circuit shall be provided to the chassis harness pump panel harness connector.

MECHANICAL SIREN ACTIVATION

The mechanical siren shall be actuated by a Linemaster model SP491-S81 foot switch mounted in the front section of the cab for use by the officer. A siren brake shall be provided on the Vista display.

The siren activation shall be interlocked with the park brake and shall only be active when master warning switch is on to prevent accidental engagement.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

ELECTRONIC SIREN AUXILIARY ACTIVATION

The electronic siren shall include pre-wiring for activation by a left hand and right hand side foot switches.

BACK-UP ALARM

An ECCO model SA917 backup smart alarm shall be installed at the rear of the chassis with an auto-adjusting output level of 87 dB to 112 dB. The alarm shall automatically activate when the transmission is placed in reverse.

INSTRUMENTATION

An ergonomically designed instrument panel shall be provided. Each gauge shall be backlit with LED lamps. Stepper motor movements shall drive all gauges. The instrumentation system shall be multiplexed and shall receive ABS, engine, and transmission information over the J1939 data bus to reduce redundant sensors and wiring.

A twenty eight (28) icon lightbar message center with integral LCD odometer/trip odometer shall be included. The odometer shall display up to 999,999 miles. The trip odometer shall display 9,999.9 miles. The LCD message center screen shall be capable of custom configuration by the users for displaying certain vehicle status and diagnostic functions.

The instrument panel shall contain the following gauges:

One (1) three-movement gauge displaying vehicle speed, fuel level, and Diesel Exhaust Fluid (DEF) level. The primary scale on the speedometer shall read from 0 to 100 MPH, and the secondary scale on the speedometer shall read from 0 to 160 KM/H. The scale on the fuel and DEF level gauges shall read from empty to full as a fraction of full tank capacity. Red indicator lights in the gauge and an audible alarm shall indicate low fuel or low DEF at 1/8th tank level.

One (1) three-movement gauge displaying engine RPM, and primary and secondary air system pressures shall be included. The scale on the tachometer shall read from 0 to 3000 RPM. The scale on the air pressure gauges shall read from 0 to 150 pounds per square inch (PSI) with a red line zone indicating critical levels of air pressure. Red indicator lights in the gauge and an audible alarm shall indicate low air pressure.

One (1) four-movement gauge displaying engine oil pressure, coolant temperature, voltmeter, and transmission temperature shall be included. The scale on the engine oil pressure gauge shall read from 0 to 100 pounds PSI with a red line zone indicating critical levels of oil pressure. A red indicator light in the gauge and audible alarm shall indicate low engine oil pressure. The scale on the coolant temperature gauge shall read from 100 to 250 degrees Fahrenheit (°F) with a red line zone indicating critical coolant temperatures. A red indicator light in the gauge and audible alarm shall indicate high coolant temperature. The scale on the voltmeter shall read from 9 to 18 volts with a red line zone indicating critical levels of battery voltage. A red indicator light in the gauge and an audible alarm shall indicate high or low system voltage. The low voltage alarm shall indicate when the system voltage has dropped below 11.8 volts for more than 120 seconds in accordance with the requirements of NFPA 1901. The scale on the transmission temperature gauge shall read from 100 to 300 degrees °F with a red line zone indicating critical temperatures. A red indicator light in the gauge and an audible alarm shall indicate a high transmission temperature.

The light bar portion of the message center shall include twenty-eight (28) LED backlit indicators. The lightbar shall be split with fourteen (14) indicators on each side of the LCD message screen. The lightbar shall contain the following indicators and produce the following audible alarms when supplied in conjunction with applicable configurations:

Honolulu Fire Department

Production Specifications – SVI #1090-1091

RED INDICATORS

Stop Engine - indicates critical engine fault
Air Filter Restricted - indicates excessive engine air intake restriction
Park Brake - indicates parking brake is set
Seat Belt - indicates a seat is occupied and corresponding seat belt remains unfastened
Low Coolant - indicates critically low engine coolant
Cab Tilt Lock - indicates the cab tilt system locks are not engaged.

AMBER INDICATORS

Malfunction Indicator Lamp (MIL) - indicates an engine emission control system fault
Check Engine - indicates engine fault
Check Transmission - indicates transmission fault
Anti-Lock Brake System (ABS) - indicates anti-lock brake system fault
High exhaust system temperature – indicates elevated exhaust temperatures
Water in Fuel - indicates presence of water in fuel filter
Wait to Start - indicates active engine air preheat cycle
Windshield Washer Fluid – indicates washer fluid is low
DPF restriction - indicates a restriction of the diesel particulate filter
Regen Inhibit - indicates regeneration of the DPF has been inhibited by the operator
Range Inhibit - indicates a transmission operation is prevented and requested shift request may not occur.
SRS - indicates a problem in the supplemental restraint system
Check Message - indicates a vehicle status or diagnostic message on the LCD display requiring attention.

GREEN INDICATORS

Left and Right turn signal indicators
ATC - indicates low wheel traction for automatic traction control equipped vehicles, also indicates mud/snow mode is active for ATC system
High Idle - indicates engine high idle is active.
Cruise Control - indicates cruise control is enabled
OK to Pump - indicates the pump is engaged and conditions have been met for pump operations
Pump Engaged - indicates the pump transmission is currently in pump gear
Auxiliary Brake - indicates secondary braking device is active

BLUE INDICATORS

High Beam indicator

AUDIBLE ALARMS

Air Filter Restriction
Cab Tilt Lock
Check Engine
Check Transmission
Open Door/Compartment
High Coolant Temperature
High or Low System Voltage
High Transmission Temperature
Low Air Pressure
Low Coolant Level
Low DEF Level
Low Engine Oil Pressure
Low Fuel
Seatbelt Indicator
Stop Engine
Water in Fuel
Extended Left/Right Turn Signal On
ABS System Fault

Honolulu Fire Department

Production Specifications – SVI #1090-1091

BACKLIGHTING COLOR

The instrumentation gauges and the switch panel legends shall be backlit using red LED backlighting.

RADIO

A Panasonic radio with weather band, AM/FM stereo receiver, compact disc player, and four (4) speakers shall be installed in the cab. The radio shall be installed above the officer position. The speakers shall be installed inside the cab with two (2) speakers recessed within the headliner of the front of the cab just behind the windshield and two (2) speakers on the upper rear wall of the cab. The radio shall cut-out with the activation of the master warning light switch.

AM/FM ANTENNA

A small antenna shall be located on the right hand side of the cab roof for AM/FM and weather band reception.

CAMERA

An Audiovox Voyager heavy duty rearview camera system shall be supplied. The system shall include one (1) box shaped camera shipped loose for OEM installation in the body to afford the driver a clear view to the rear of the vehicle. The camera shall be wired to a single Weldon Vista display and control panel.

The camera system display can also be activated through the Vista display and control panel. The rear camera display shall activate when the vehicle's transmission is placed in reverse.

The rear camera shall include an integral one-way communication device for the use of voice commands directly to the driver. There shall be a virtual button provided on the Vista display and control screen to deactivate the speaker.

CAB EXTERIOR PROTECTION

The cab face shall have a removable plastic film installed over the painted surfaces to protect the paint finish during transport to the body manufacturer.

FIRE EXTINGUISHER

A 2.50 pound D.O.T approved fire extinguisher with BC rating shall be shipped loose with the cab.

ROAD SAFETY KIT

The cab and chassis shall include one (1) emergency road safety triangle kit.

DOOR KEYS

The cab and chassis shall include a total of four (4) door keys for the manual door locks.

DIAGNOSTIC SOFTWARE ENGINE

The cab and chassis shall include a Cummins Quick Check QC5600 kit. The system shall be shipped loose with the chassis and shall include the following: a QC5600 handheld computer, cables, AC power supply, and the QC5600 software application suite, One per order.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

DIAGNOSTIC SOFTWARE TRANSMISSION

The cab and chassis shall include the latest version of Allison's DOC diagnostic software for the transmission, which shall interface with the MagiKey®. The software shall be compatible with both 3000 and 4000 Gen IV transmissions.

Allison® DOC™ for PC-Service Tool is backward compatible with older electronically controlled transmissions.

The feature matrix for Allison Transmission Diagnostic Tools shall offer a user friendly table which shall guide you through all available and unavailable functions of the Allison Transmission diagnostic tools.

The software shall be supported by Microsoft® Windows, XP, Professional and Window 2000 (SP4 or later), One per order.

DIAGNOSTIC SOFTWARE ABS

The cab and chassis shall include diagnostic software for the Wabco ABS system shipped loose with the vehicle. This software shall interface with the MagiKey® parallel port interface module. The Wabco software version E software is a comprehensive PC-based diagnostics program. The system requirements recommended by Meritor Wabco are:

- 32/64 Bit CPU-based PC
- Microsoft Windows® XP, Vista or Windows 7 operating system
- 512 MB RAM
- 60 MB HD space for full installation
- RP1210A compliant communications adapter for SAE J1708/J1587 or PLC Serial Port, Parallel Port or USB Port for RP1210A adapter

DIAGNOSTIC INTERFACE MODULE

The shipped cab and chassis shall include a USB-Link™ interface module equipment kit which, shall communicate between the vehicle and the computer. The vehicle interface is compatible with RP1210A OEM diagnostic software including: Caterpillar, Cummins, Detroit Diesel, Allison Transmission and Meritor Wabco.

The kit shall include the USB-Link™, a USB cable which shall be 15.00 feet in length, a quick start reference guide, a 6 and 9 pin "Y" Deutsch adapter, and Configuration utility CD and manuals.

The software shall be supported by Windows 2000, XP, Vista, and Windows 7, One per order.

DIAGNOSTIC SOFTWARE OCCUPANT PROTECTION

Diagnostic software for the Spartan Advanced Protection System shall be available for free download from the Spartan Chassis website to Spartan authorized OEMs, dealers and service centers, as well as the vehicle owner.

The software has been validated to be compatible with the following RP1210 interface adapters:

- Dearborn Group DPA4 Plus
- Noregon Systems JPRO® DLA+
- Cummins INLINE5
- Cummins INLINE6
- NexIQ™ USB-Link™

The software and adapter utilize the SAE J1939-13 heavy duty nine (9) pin connector which is located below the driver's side dash to the left of the steering column.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

WARRANTY

Summary of Warranty Terms:

THE FOLLOWING IS SUMMARY OF WARRANTY TERMS FOR INFORMATION ONLY. THE ACTUAL LIMITED WARRANTY DOCUMENT, WHICH IS ATTACHED TO THIS OPTION, CONTAINS THE COMPLETE STATEMENT OF THE SPARTAN MOTORS USA LIMITED WARRANTY. SPARTAN'S RESPONSIBILITY IS TO BE ACCORDING TO THE TERMS OF THE COMPLETE LIMITED WARRANTY DOCUMENT.

The chassis manufacturer shall provide a limited parts and labor warranty to the original purchaser of the custom built cab and chassis for a period of twenty-four (24) months, or the first 36,000 miles, whichever occurs first. The warranty period shall commence on the date the vehicle is delivered to the first end user.

CHASSIS OPERATION MANUAL

There shall be two (2) digital copies of the chassis operation manual provided with the chassis. The digital data shall include a parts list specific to the chassis model.

ENGINE AND TRANSMISSION OPERATION MANUALS

The following manuals specific to the engine and transmission models ordered will be included with the chassis in the ship loose items:

- (1) Hard copy of the Engine Operation and Maintenance manual with CD
- (1) Digital copy of the Transmission Operator's manual
- (1) Digital copy of the Engine Owner's manual

ENGINE SERVICE MANUALS

There shall be one (1) printed hard copy set of Cummins ISX engine service reference manuals which shall be provided with the chassis.

TRANSMISSION SERVICE MANUALS

There shall be one (1) printed hard copy set of Allison 4000 transmission service manuals included with the chassis.

CAB/CHASSIS AS BUILT WIRING DIAGRAMS

The cab and chassis shall include one (1) digital copy of wiring schematics and option wiring diagrams.

PAINT CONFIRMATION

There shall be a paint confirmation letter sent to the body manufacturer with paint spray outs to confirm the cab primary paint color or primary and secondary paint color as specified by the paint options.

CAB TO AXLE DIMENSION

Cab to axle will be 118".

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CHASSIS MODIFICATIONS

LUBRICATION AND TIRE DATA PLATE

A permanent label in the driving compartment shall specify the quantity and type of the following fluids used in the vehicle and tire information:

- Engine oil
- Engine coolant
- Chassis transmission fluid
- Pump transmission lubrication fluid . . (if applicable)
- Pump priming system fluid, if applicable . . (if applicable)
- Drive axle(s) lubrication fluid
- Air conditioning refrigerant . . (if applicable)
- Air conditioning lubrication oil . . (if applicable)
- Power steering fluid
- Cab tilt mechanism fluid . . (if applicable)
- Transfer case fluid . . (if applicable)
- Equipment rack fluid (if applicable)
- CAFS air compressor system lubricant . . (if applicable)
- Generator system lubricant . . (if applicable)
- Front tire cold pressure
- Rear tire cold pressure
- Maximum tire speed ratings

VEHICLE DATA PLATE

A permanent label in the driving compartment which indicates the following:

- Filter part numbers for the;
 - Engine
 - Transmission
 - Air
 - Fuel
- Serial numbers for the;
 - Engine
 - Transmission
- Delivered Weights of the Front and Rear Axles
- Paint Brand and Code(s)
- Sales Order Number

OVERALL HEIGHT, LENGTH DATA PLATE (US)

The fire apparatus manufacturer shall permanently affix a high-visibility label in a location visible to the driver while seated.

The label shall show the height of the completed unequipped vehicle in feet and inches (meters), the length of the completed vehicle in feet and inches (meters to nearest 1/10th), and the GVWR in tons (metric tons).

Wording on the label shall indicate that; "The information shown was current when the apparatus was manufactured. If the overall height changes while the vehicle is in service, the fire department must revise that dimension on the plate".

Honolulu Fire Department

Production Specifications – SVI #1090-1091

PERSONNEL CAPACITY

A label that states the number of personnel the vehicle is designed to carry shall be located in an area visible to the driver.

SEAT BELT WARNING - FAMA06/07

A safety sign FAMA06 shall be visible from each seat that is not equipped with occupant restraint and therefore not intended to be occupied while the vehicle is in motion.

A safety sign FAMA07, which warns of the importance of seat belt use, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

EQUIPMENT MOUNTING FAMA10

A safety sign FAMA10, which warns of the need to secure items in the cab, shall be visible inside the cab.

FIRE SERVICE TIRES - FAMA12

A safety sign FAMA12, which warns of the special requirements for fire service-rated tires, shall be visible to the driver entering the cab of any apparatus so equipped.

HELMET WARNING - FAMA15

A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

CLIMBING METHOD - FAMA23

A safety sign FAMA23, which warns of the proper climbing method, shall be visible to personnel entering the cab and at each designated climbing location on the body.

REAR STEP CROSSWALK WARNING - FAMA24

A safety sign FAMA24, which warns personnel not to ride on the vehicle, shall be located at the rear step areas and at any cross walkways.

FINAL STAGE MANUFACTURER VEHICLE CERTIFICATION

A final stage manufacturer vehicle certification label shall be provided and installed in the driver cab door jamb area.

FRONT BUMPER

The front bumper shall be as provided by the cab/chassis manufacturer. No other alteration or modifications are required to extension length.

BUMPER GRAVELSHIELD

The bumper extension gravel shield shall be provided by the cab/chassis manufacturer.

AIR HORN(S)

The air horn(s) shall be supplied and installed by the cab/chassis manufacturer.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

FRONT TOW PROVISIONS

The front tow provisions shall be supplied and installed by the cab/chassis manufacturer.

AIR INTAKE SYSTEM

An air filter shall be provided in the engine's air intake system by the customer cab/chassis manufacturer.

Air inlet restrictions shall not exceed the engine manufacturer's recommendations.

The air inlet shall be equipped with a means of separating water and burning embers from the air intake system.

This requirement shall be permitted to be achieved by either of the following methods:

1. Provision of a device such that burning particulate matter larger than 0.039 in. (1.0 mm) in diameter cannot reach the air filter element.
2. Provision of a multi screen ember separator capable of meeting the test requirements defined in the Parker Hannafin, Racor Division, publication LF 1093-90, *Ember Separation Test Procedure*, or an equivalent test.

EXHAUST

The exhaust system shall be as provided by cab/chassis manufacturer. The tailpipe may require some modifications for proper ground clearances and fit with body.

The exhaust piping and discharge outlet shall be located or shielded so as not to expose any portion of the vehicle or equipment to excessive heating.

Exhaust pipe discharge shall be directed away from any operator's position or entry doors on body.

Where parts of the exhaust system are exposed so that they are likely to cause injury to operating personnel, protective guards shall be provided.

BATTERIES

The six (6) Spartan factory supplied batteries shall be removed from battery trays and replaced with two (2) NorthStar model NSB-AGM8D batteries (21" x 11" x 9.5" H, 185 lbs. each), one (1) each side in battery trays.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

MDT/RADIO/ANTENNA/CHARGER INSTALLATION

MDT

A Mobile Data Terminal (MDT) as specified below or approved substitute MDT shall be **provided by Harmer Communications and delivered to SVI for installation** as per Honolulu Fire Department. MDT shall be a Panasonic CF-33 (CH-33AFHAZVM) Toughbook. The location of mounting the entire MDT system (i.e. Panasonic CF-33 and Havis Docking Station, Cradlepoint Modem and Panorama Antenna) shall be determined by the authorized HFD personnel during the Pre-Construction meeting. The Panasonic CF-33 shall be provided as part of this bid.

The MDT Slide Rail System (C-LS-18) requires a Fixed Mount Off Set Platform (C-HDM-30x) from 4" to 15" as needed by the design of the custom console. Once the Off Set is determined, the Tilt/Swivel Motion Device (C-MD-202) is mounted, followed by the Vehicle Docking Station mounting bracket that is included with the Havis Vehicle Docking Station (DS-PAN-1102). Ensure installation allows Panasonic CF-33 to be mounted with proper ventilation and access all ports on left and right sides.

The Docking Power Supply (LPS-104) shall be hooked up to the on board battery charger "battery saver circuit" for charging of computer batteries when the shore line is plugged in. The output of the Docking Power Supply shall be connected to the Vehicle Docking Station. The Docking Station Power block shall be mounted in the Vehicle Docking Station as stated in the installation manual. Note: Wireless On/Off switch on the Docking Station must be in the "On" position; install the Screen Stiffener to the Docking Station.

The Cradlepoint Ruggedized 3G/4G/LTE (IBR1100LPE-SP) modem shall be hooked up to the battery and must remain "hot" at all times. An in-line shutoff switch shall be installed between the battery and modem to allow fire personnel to easily reset the modem. The location of the switch shall be determined in the Pre-Construction meeting (Note: Should be located where it cannot be accidentally switched off). The Cradlepoint modem shall be mounted near the docking station so the modem lights are easily visible and cabling for both sides of the modem are accessible without removing the modem.

The Cat5e and Serial cables shall be installed from the Havis Docking Station to the Cradlepoint modem. Use the following ports on the Havis Docking Station: Cat5e cable to Ethernet RJ45 port and Serial cable to Serial 1 port. Use the following ports on the Cradlepoint Modem: Cat5e cable to LAN1 port and Serial cable to RS-232 port. Note: The length of the cables will be determined by the mounted location of the Cradelpoint modem, articulation of the Docking Station tilt/swivel and Slide Mount movements.

The Cradlepoint modem serial and ESN numbers shall be recorded and included with as-built and warranty documentation. These numbers are required to activate the modem and entry into the Cradlepoint Cloud Manager.

The Panorama MiMo antenna shall be mounted and cabled to the modem as specified in the installation guide. The mounting location of the antenna shall be determined by authorized HFD personnel during the Pre-Construction meeting.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

The following parts shall be supplied by the manufacturer for mounting of the MDT;

- Panasonic CF-33, #CF-33AFHAZVM (i5-7300U, Win 10 Pro, 256GB SSD, 8GB Mem, WiFi, Bluetooth, Dual-Pass, Camera, Premium Keyboard
- Panasonic Protection Plus, #CF-SVCLTNF5Y
- Slide Rail System, Havis #C-LS-18 eighteen (18) in.
- Fixed Mount Top Off Set Platform, Havis #C-HDM-30x. x = 2 (4" off set), 3 (6" off set), 4 (9" off set), 5 (variable 9" to 15")
- Tilt/Swivel Motion Device, Havis #C-MD-202.
- Vehicle Docking Station, Havis #DS-PAN-1102 (Dual-Pass through model).
- Screen Stiffener, Havis.
- Cradlepoint Ruggedized 3G/4G/LTE #IBR1100LPE-SP with 5-year Enterprise Cloud Manager PRIME + Cradle Care Support Agreement
- Panorama Low Profile MiMo 2x LTE/Wifi/GPS Antenna with 5m Cable Kit, #XK-IN1958-W)
- 10ft (or as needed) Shielded Serial DB9 M/F extension cable.
- 10ft (or as needed) Shielded Snagless Blue Cat5e patch cable.

TWO-WAY RADIO SYSTEM

A Harris XG-75M dual band 700/800 MHz mobile two-way radio **shall be provided by Harmer Communications and delivered to SVI for installation** as per Honolulu Fire Department. The mobile two-way radio shall be installed according to manufacturer's specifications and industry best practices. Radio shall be mounted in a readily accessible location to facilitate programming and maintenance. Control head shall be mounted under pivoting siren unit in cab. An 18 inch service loop for all cables shall be included if radio is mounted in a confined space. Radio serial number shall be recorded and included with as-built and warranty documentation. Two-way radio antenna shall be mounted on roof along center axis a minimum of 18 inches away from the light bar. **Radio installed in officer side lower center dash.**

RADIO CHARGERS

NOTE: Radio Chargers to be provided by HFD and shipped to SVI for installation.

SVI shall install in the cab, two (2) Global Technology Systems tri-chemical portable radio battery chargers, part number HCH-P7101DCH-CHG, and bracket, part number HCHP7101DC-BKT. Positioning of the chargers should be such that it is easily accessible by the driver and the officer without obstructing movement of the Mobile Data Terminal. Device shall be wired to a 12 volt DC source present when truck is running or connected to shore power. Remaining chargers shall be located and mounted at the final inspection.

The contractor shall provide and install the following:

- One (1) 6 bay universal charger part # HCH-XG6-CHG 120 volt or approved substitute. Charger mounting location to be determined at the preconstruction meeting.
- One (1) ICOM BC-214-14 6-bay charger or approved substitute. Charger mounting location to be determined at the preconstruction meeting.

SECOND SPARE CIRCUIT

The equipment shall have one (1) pair of wires installed, with the following features:

- Wires shall be connected directly to the battery power.
- Wires shall be protected to twenty (20) amps.
- Power and ground shall end in the dash area.
- Terminations and splices shall be with insulated with heat shrink
- Wires shall be sized to one hundred twenty-five percent (125%) of the protection.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

12 VDC FUSE BLOCK

There shall be two (2) Blue Sea Systems 100 amp ST Series blade type fuse block with screw type terminals for both positive and negative buss with cover provided for distribution of up to six (6) 30 amp, 12 VDC circuits. Fuse block shall be located per required circuits and be protected from damage.

ATC SWITCH

The additional switch provided in driver dash will be programmed to activate the braking system ATC controls.

SEAT BELT COLOR

Section 14.1.3.3 of the NFPA 1901 Standards, requires all seat belt webbing in cab to be bright red or bright orange in color, and the buckle portion of the seat belt shall be mounted on a rigid or semi rigid stalk such that the buckle remains positioned in an accessible location.

SEAT BELT WEB LENGTH - CUSTOM CAB

Sections 14.1.3.2 and 14.1.3.3 of the NFPA 1901 standards, require the effective seat belt web length for a Type 1 lap belt for pelvic restraint to be a minimum of 60", and a Type 2 pelvic and upper torso restraint-style seat belt assembly to be a minimum of 110".

The chassis seat belt web length as supplied by the custom chassis manufacturer shall be compliant to NFPA Standards 14.1.3.2 and 14.1.3.3.

SEAT BELT / VDR SYSTEM - CUSTOM CAB

The seat belt warning and vehicle data recorder systems shall be provided by the cab/chassis manufacturer.

MAP BOX

A map box shall be provided in the cab with an open top. The map box shall be securely fastened to the cab interior per NFPA 1901 standards. It shall be fabricated of 1/8" smooth aluminum and painted with a black or gray textured powder coat paint finish for durability and finished appearance.

The map box shall be designed to hold at least four (4) 1-3/4" 3-ring binders. Two (2) cup holders shall be provided in design.

- There shall be one (1) OnScene Solutions cargo straps provided to secure the stored equipment.

TIRE PRESSURE VISUAL INDICATORS

The tire pressure monitoring system shall be supplied by the cab and chassis manufacturer.

One (1) Bendix TPS LT tool wireless reader shall be provided with order.

HELMET STORAGE

No helmet storage is required in the cab driving area. A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

HELMET STORAGE

No helmet storage is required in the cab crew area. A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

CAB CRASH TEST CERTIFICATION

A cab crash test certification from the fire apparatus manufacturer shall be provided with the equipment. A copy of this certification shall be included with the bid.

NOTE: There shall be no exception to any portion of the cab integrity certification requirements. Nonconformance shall lead to immediate rejection of bid.

The certification shall state that the cab does meet or exceed the requirements below:

- 1) European Occupant Protection Standard ECE Regulation No. 29.
- 2) SAE J2422 Cab Roof Strength Evaluation - Quasi-Static Loading Heavy Trucks.

CAB MIRRORS, DRIVER ADJUSTABLE

Section 14.3.5 of the NFPA 1901 Standards, 2009 edition, requires all primary rear view mirrors used by the driver to be adjustable from the driver's position.

CAB ROOF PAINT

The upper level of cab roof shall be sprayed with Scorpion gray (white preferred) rubberized material with grit for slip resistance. The unit number shall be on the non-sprayed area of roof.

OVERHEAD AIR CONDITIONER

Add proper size nut-serts to Spartan overhead air conditioner covers.

HUB AND NUT COVERS

The cab and chassis supplied front and rear wheels hub caps and wheel nut covers shall be installed prior to delivery of completed unit.

MUDFLAPS

There shall be 1/4" rubber mudflaps provided and installed behind each set of tires to prevent throwing road debris and lower road spray.

AIR BRAKE SYSTEM QUICK BUILD-UP

The air brake quick build-up system shall be supplied from the specified automatic electric compressor in order to maintain full operating air pressure while the vehicle is not running.

The quick buildup system shall provide sufficient air pressure so that the apparatus has no brake drag and is able to stop under the intended operating conditions following the 60-second buildup time.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

AUXILIARY AIR COMPRESSOR

A Gast Model 5HCD-10-M550X air compressor, or approved substitute shall be provided and powered by 120 VAC shoreline electrical system.

The compressor shall maintain the air pressure in the chassis air brake system while the vehicle is not in use. A Square-D Model 1-9013-GHG2J30 pressure switch, or approved substitute shall sense when the system pressure drops and automatically starts the compressor, which then shall run until pressure is restored. An air drier filter with moisture drain shall be provided and installed in the system.

Compressor to be located mounted tight to wall on curbside cab floor area under desk. A vertical kick panel shall be provided to protect air compressor unit.

A relay shall be installed that will disconnect the battery charger when the air compressor turns on.

A weatherproof two position toggle type switch shall be installed above the shoreline receptacle. The switch shall be wired to operate the “on board” battery chargers/inverter and auxiliary air brake compressor in position one, and to run battery charger/inverter only in position two. Proper switching labeling shall be included.

- Top switch position – Battery charger and air compressor
- Bottom switch position – Battery charger/inverter



ELECTRIC DOOR LOCK INTERFACE

Electric door locks shall be provided and interfaced as follows;

The electric cab door locks shall be provided by the cab/chassis manufacturer.

The body electric door locks shall be interfaced with the chassis electric door lock system.

ROAD EMERGENCY SAFETY KIT

The DOT required reflective triangles, warning flares, and fire extinguisher shall be provided by cab and chassis supplier.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

REAR CAB DESK LAYOUT

REAR CAB DESK - STRAIGHT

The rear portion of the cab shall be provided with a full cab width desktop which shall be approximately 26" deep x 91" long and located approximately 30" from floor. The desk top surface shall be fabricated of 3/16" smooth finish aluminum.

There shall be 2-1/2" diameter holes with plastic edge grommet provided at each rear corner for wiring of future equipment located on the desk top. The desk top shall be painted dark gray with a hammer tone powder coat paint finish for a hard and durable surface.

12 VDC USB, DUAL PORT

There shall be two (2) Blue Sea 12 VDC dual port USB provided and installed on vertical lip of rear desk, wired battery direct.

CAB INTERIOR CABINET - OVERHEAD

There shall be two (2) overhead cabinet(s) provided on interior. Each cabinet shall be constructed of 1/8" smooth finish aluminum, and painted with a dark gray hammer tone powder coat paint finish for a hard durable surface. Each cabinet shall be approximately 20" high x 32" deep (at bottom) x 24" wide. If cab is specified with air bags, the interior cabinet(s) will be mounted clear of the deployment area.

The above cabinet(s) shall have lift-up type door(s) framed from 80/20 Inc. aluminum extrusions, rounded corners, and gas piston type door stays. The door shall have a dry-erase outer surface.

INTERIOR UNDER CABINET LED LIGHTS

Two (2) OnScene Solution model #70152, 10" x 6" x 7/8", 10-30 VDC, surface mount dual red and white LED light(s) with clear lens shall be provided under cabinet. Each light shall be individually switched with a high/low intensity setting. In addition light(s) will be capable of a 5 second delay after switching off.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

INTERIOR PEDESTAL SEAT, 3-POINT ABTS

Two (2) USSC Valor ABTS high back model G2FR20 series reclining seat(s) shall be provided. The seat(s) shall feature an 20" wide padded seat cushion. Seat(s) shall be installed on a swivel pedestal base with 3 locking positions, 6" fore/aft adjustment, and securely mounted to the reinforced floor structure.

The seat shall feature an all belts to seat (ABTS) style of safety restraint which features a red three-point shoulder harness with ReadyReach and automatic dual retractors.

The minimum vertical dimension from the seat H-point to the ceiling for each belted seating position shall be 35.00 inches. This model of seat shall have successfully completed the static load tests by FMVSS 207/210. This testing shall include a simultaneous forward load of 3000 pounds each on the lap and shoulder belts and twenty (20) times the weight through the center of gravity.

The USSC Valor seats shall include military grade high strength, wear resistant fabric made of durable ballistic polyester. A synthetic coating shall be bonded to the back side of the material to help protect the seats from UV rays and from being saturated or contaminated by fluids. The fabric shall include the integration VALORTech XD®, a proprietary antimicrobial agent, designed to resist toxicity and contaminants. The material meets FMVSS 302 flammability requirements. Seats material color shall closely match the cab chassis supplied seat colors.

Each seat shall be wired to the on-board seat belt indicator, and Vehicle Data Recorder (VDR) systems per NFPA 1901.

120 VAC OUTLETS, DESK

- There shall be one (1) 120 VAC outlet(s) located under desk against the back edge.
 - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
- There shall be one (1) approximate 2' long 120 VAC outlet strip(s) with straight blade household type outlets provided.
 - Outlet(s) shall be powered by both the shore power and specified inverter through a relay system.

FUEL FILL

There shall be one (1) fuel fill door located in the streetside exterior wheel well panel, behind the rear axle. The fill door shall be fabricated from brushed stainless steel. There shall be a permanent label with the text "DIESEL FUEL ONLY" located adjacent to the fuel fill access.

A stainless steel scuff plate will be provided around the fill door to prevent chipping paint.

Fuel cap will be Velvac brand with retainer chain.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

BODY DESIGN

The importance of public safety associated with emergency vehicles requires that the construction of this vehicle meet the following specifications. These specifications are written to establish the minimum level of quality and design. All Bidders shall be required to meet these minimum requirements.

It is the intent of these specifications to fully describe the requirements for a custom built emergency type vehicle. In order to extend the expected service life of this vehicle, the body module shall be removable from the chassis frame and be capable of being installed on a new chassis.

The sheet metal material requirements, including alloy and material thickness, throughout the specifications are considered to be a minimum. Since such materials are available to all Manufacturers, the material specifications shall be strictly adhered to.

The fabrication of the body shall be formed sheet metal. Formed components shall allow the Honolulu Fire Department to have the body repaired locally in the case where any object has struck the body and caused damage. The use of proprietary extrusions will prevent the Honolulu Fire Department from such repair and shall NOT be used. All fabricated body components to be cut by a laser or water-jet for superior cut edge quality.

Following construction of the subframe, which supports the apparatus body, the sheet metal portion of the body shall be built directly on the subframe. The joining of the subframe and body shall be of a welded integral construction.

The sheet metal fabrication of the body shall be performed using inert gas continuous feed welders only. The entire body shall be welded construction. The use of pop rivets in any portion of structural construction may allow premature failure of the body structure. Therefore, pop rivets shall NOT be used in the construction of the structural portions of the body. This includes side body sheets, inner panels of compartment doors, and any other structural portions of the body.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

EXTERIOR ALUMINUM BODY

The fabrication of the body shall be constructed from aluminum 3003H-14 alloy smooth plate. This shall include compartment front panel, vertical side sheets, side upper rollover panels, rear panels and compartment door frames.

The body compartment floors and exterior panels shall be constructed with not less than 3/16" (.187) aluminum 3003H-14 smooth plate. Interior compartment dividing walls shall be constructed with not less than 1/8" (.125) aluminum 3003H-14 smooth plate. Lighter gauge sheet metal will not be acceptable in these areas, No Exceptions.

The front and rear corners of body shall be formed as part of the front or rear body panels. This provides a stronger body corner and finished appearance. The use of extruded corners, or caps will not be acceptable, No Exceptions.

The door side frame openings shall be formed "C" channel design. An electrical wiring conduit raceway running the full length of exterior compartments shall be provided. This raceway shall contain all 12 volt wiring running to the rear of the apparatus, permitting easy accessibility to wiring.

Individual compartment modules, with dead air space voids between compartments, will not be an acceptable method of compartment construction.

The compartments shall be an integral part of the body construction. Compartment floors from front of body to ahead of rear axle, also from rear axle to rear of body shall be single one-piece sections. Compartment floors shall be preformed, then positioned in body and welded into final position.

Compartment floors shall have a "sweep-out" design with door opening threshold positioned lower than compartment floor, permitting easy cleaning of compartments. Angles, lips, or door moldings are not acceptable in the base of compartment door opening. One-way rubber drain valves shall be provided in compartment floors so that a water hose may be used to flush-out compartment area.

All exterior seams in sheet metal below frame, and around the rear wheel well area shall be welded and caulked to prevent moisture from entering the compartments. All other interior seams and corners shall be sealed with silicone based caulk prior to painting.

Only stainless steel bolts, nuts, and sheet metal screws shall be used in mounting exterior trim, hardware and equipment.

DRIP RAILS

The body shall have drip rails over the side full height compartments. The drip rails shall be formed into the upper body panels providing a ridged lower panel and a flat upper body panel surface. The use of mechanically fastened, taped or glued on drip rails will not be acceptable, No Exceptions.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

WALKWAY/ROOF COMPARTMENT SUPPORT

The upper body floor structure shall be integral with the body sheet metal construction and shall be an all welded assembly. Bolted or glued assemblies shall not be accepted, .
All seams in roof material shall be fully and continuously welded to prevent entry of moisture.

There shall be a total of four (4) 2" x 2" x 1/4" 6061-T6 alloy aluminum "C" channels running the length of body, two (2) on each outboard side. These "C" channels shall be used for roof support and in addition shall be used for mounting of any specified reels. This open "C" channel design along with special reel mounting clips allows for a universal location of any specified reels within each compartment.

In between the two (2) center "C" channels running the length of body shall be 2" x 2" x 1/4" 6061-T6 alloy aluminum tubing running perpendicular to walkway and welded in place on approximate 16" centers to support roof and/or walkway structure specified. Spacing greater than 16" that can allow oil canning of walkway shall not be allowed, .

A 2" formed radius shall be provided along the body sides and utilized as a wiring trough. The use of aluminum extrusions in this area shall not be acceptable, .

Honolulu Fire Department

Production Specifications – SVI #1090-1091

BODY SUBFRAME

The chassis frame rails shall be fitted with 1/4" custom extruded UHMW polyethylene rail cap to isolate the body frame members from direct contact with chassis frame rails.

The body subframe shall be constructed from 6061T6 aluminum alloy tubing. Subframe shall consist of two (2) 2" x 4" x 1/4" aluminum tubes minimum, the same width as the chassis frame rails. Welded to this tubing shall be cross members of 2" x 4" x 1/4" aluminum. Smaller dimension, lighter gauge tubing or angle material subframe shall not be accepted.

These cross members shall extend the full width of the body to support the compartments. Cross members shall be located at front and rear of the body, below compartment divider walls, and in front and rear of wheel well opening. Additional aluminum cross members shall be located on 16" centers, or as necessary to support walkway or heavy equipment.

To form the frame, the tubing shall be beveled and welded at each joint using 5356 aluminum alloy welding wire.

BODY MOUNTING

The body subframe shall be fastened to the chassis frame with a minimum of six (6) spring loaded body mounts. Each mount shall be configured using a two-piece encapsulated slide bracket. The two (2) brackets shall be fabricated of heavy duty 1/4" thick steel and shall have a powder coat finish to prevent any corrosion. Each mounting assembly shall utilize two (2) 3/4" diameter x 6" long grade 8 bolts and two (2) heavy duty springs. The assembly design shall allow the body and subframe to act as one (1) component, separate from the chassis. As the chassis frame twists under driving conditions, the spring mounting system shall eliminate any stress from being transferred into the body. The spring loaded body mounts shall also prevent frame side rail or body damage caused by unevenly distributed stress and strains due to load and chassis movement.

Body mountings that do not allow relief from chassis movement will not be acceptable.

10" REAR STEP BUMPER

The full width rear bumper shall be constructed from 2" x 2" x 1/4" steel tubing frame and covered with 3/16" NFPA compliant aluminum tread plate. The bumper shall extend from the rear vertical body panel 10" and provide a rear step with a minimum of 1/2" space at body for water drainage.

REAR TOW EYES

There shall be two (2) heavy duty rear mounted tow eyes securely attached to the chassis frame and mounted above the rear bumper. The tow eyes shall be fabricated from 1" thick steel plate with a 3" diameter opening. Tow eyes shall have a yellow painted finish.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

TRAILER HITCH

A Class IV weight carrying capacity rear hitch receiver shall be provided below the rear bumper. The receiver shall be attached to chassis frame with heavy duty steel frame work with a black hammertone powder coat paint finish.

The hitch shall be complete with a 2" square receiver. Without the use of a "weight distribution" ball hitch the Class IV receiver shall have a capacity of 10,000 lbs. gross trailer weight and a maximum tongue weight of 1,000 lbs.

A label shall be provided in a location in which it is visible to an operator making trailer connections. The label shall state the maximum GVWR and tongue weight of the trailer that can be safely towed with the hitch system.

Two (2) safety chain attachment points shall be provided near the hitch point for hitches designed to use safety chains, each designed with an ultimate strength of not less than the maximum GVWR specified on label.

TRAILER ELECTRICAL RECEPTACLE

For hydraulic brake equipped or electric brake equipped trailer towing capability, a primary electrical receptacle shall be provided near the hitch point and shall match the umbilical cable specified. Receptacle shall be a 7-Way Blade Type socket, the same as used on most Light Duty Trucks and RV's.

TRAILER AUXILIARY ELECTRICAL RECEPTACLE

An auxiliary electrical receptacle shall be provided near the hitch point and shall match the umbilical cable specified for optical warning lights. Receptacle shall be a 7-Way Pin Type Socket, ISO3731 compliant with a reverse ground terminal.

RECEIVER WITH TRAILER BALL

No hitch receiver with trailer ball will be provided with completed unit.

TRAILER BRAKE CONTROLLER

A Prodigy model #90185 trailer brake controller (or equal) shall be supplied and installed in the cab. The controller shall apply power to the trailer brakes in proportion to vehicle's deceleration. The controller shall provide a continuous diagnostic check for proper connection and shorted magnet conditions.

GROUND LIGHTS

There shall be two (2) OnScene 8" Access LED lights installed below bumper capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting shall be switchable but activated automatically when the vehicle park brake is set.

WHEEL WELL EXTERIOR PANEL

The exterior panel of the body wheel well enclosure shall be constructed from 3/16" smooth aluminum panels.

STAINLESS STEEL BODY FENDERS

The body wheel well openings shall be provided with round radius, polished stainless steel fenderettes. The fenderettes shall be bolted and easily replaceable if damaged. The fenderettes shall be installed using a rubber gasket to reduce buildup of moisture and/or debris.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

WHEEL WELL LINERS

The wheel wells shall be provided with an easily removable 1/8" smooth aluminum, circular inner fender liner. The inner liner shall be bolted to the wheel well with stainless steel bolts and spaced away from the wheel well so the liner will not accumulate dirt or water.

SCBA CYLINDER COMPARTMENTS

There shall be three (3) SCBA cylinder storage compartments located, two (2) on the curbside, and one (1) on the streetside of rear wheel well area. Each compartment shall be capable of storing two (2) SCBA (60 min.) cylinders. Each compartment shall have a vertical hinged stainless steel aluminum door with a positive catch latch and painted primary lower body color. Each compartment shall allow the storage of an SCBA cylinder or a fire extinguisher up to 7-3/4" in diameter x 24" deep. The door shall activate the "Hazard Warning Light" in the cab when not in the closed position.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

BODY PAINT SPECIFICATIONS

BODY PAINT PREPARATION

After the body and components have been fabricated they shall be disassembled so when vehicle is complete there shall be finish paint beneath the removable components. The body shall be removed from chassis during the paint process to insure proper paint coverage. The body and components shall be metal finished as follows to provide a superior substrate for painting.

The exterior (and interior, if painted) body shall undergo a thorough cleaning process starting with a biodegradable phosphoric acid solution to begin the etching process followed by a complete clear water rinse. The next step shall consist of a chemical conversion coating applied to seal the metal substrate and become part of the metal surface for greater film adhesion.

All bright metal fittings, if unavailable in stainless steel or polished aluminum, shall be chrome plated. Iron fittings shall be copper under plated prior to chrome plating.

PAINT PROCESS

The paint process shall follow the strict standards set forth by PPG Industries guidelines. Painters applying PPG products will be PPG Certified Commercial Technicians, and re-certified every two (2) years. The body shall go through the following paint process;

- 1) Clean bare metal with a wax and grease remover using low lint rags.
- 2) Inspect, straighten, and hammer high points, grind all seams, sharp edges, and welds. DA sand entire paintable surfaces using 24-180 grit dry paper. Plastic fill all low spots and DA sand fill areas using 36-180 grit dry paper. Apply pinhole filler and DA sand areas using 80-180 grit dry paper.
- 3) Re-clean bare metal using a wax and grease remover and low lint rags.
- 4) Within 24 hours, a PPG Delfleet® epoxy color primer with proper hardener for corrosion resistance using a pressure pot spray gun and applying 2-5 full wet coats or 1.5-8.0 dry mils max. achieving full hiding and allow to air dry 60 minutes @ 70°F or bake for 45 minutes @ 140°F degree.
- 5) Inspect, putty fill, and dry guild coat entire body surface and DA sand using 180-400 grit dry paper.
- 6) Re-clean bare metal using a wax and grease remover using low lint rags.
- 7) A PPG Delfleet® primer sealer with proper hardener and thinner shall be sprayed using a pressure pot spray gun and applying 1 full wet coat or 1.0-2.0 dry mils achieving full hiding and allow to flash off in spray booth for minimum of 60 minutes @ 70°F.
- 8) A PPG Delfleet® FBCH basecoat (color) with proper hardener and dry additive shall then be sprayed using a pressure pot set @ 45-60 PSI and achieving full hiding or 1.5-2.0 wet mils and allow to flash off in spray booth 45-60 minutes before applying clearcoat.
- 9) A PPG Delfleet® clearcoat with proper hardener and thinner shall be sprayed using a pressure pot spray gun and applying 2-3 full wet coats or 5.0 wet mils for a uniform gloss and allow to flash off in spray booth 10 minutes and bake for 120-140 minutes @ 125°F (surface temp.).
- 10) After cooling, DA sand heavy orange peel or runs using 1000 grit dry sand paper and final DA sand using 1500-2000 grit dry sand paper. Wipe off all surfaces to remove dust and debris. Buff unit as needed using 3M rubbing compound and a white wool pad and inspect until all sand scratches are removed.
- 11) Polish as needed using 3M Perfect-It-Polish and a black foam pad, repeat as necessary and inspect until all sand scratches are removed.

PAINT - ENVIRONMENTAL IMPACT

The contractor shall meet or exceed all current State (his) regulations concerning paint operations. Pollution control shall include measures to protect the atmosphere, water and soil. PPG Delfleet® Evolution paint shall be free of all heavy metal (lead & chromate) components. Paint emissions from sanding and painting shall be filtered and collected. All paint wastes shall be disposed of in an environmentally safe manner. Solvents used in cleanup operations shall be collected, sent off-site for distillation and returned for reuse.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

FASTENERS

Prior to the assembly and reinstallation of exterior components; i.e. warning and DOT lights, handrails, steps, door hardware, and miscellaneous items, a Mylar isolation tape, or gasket shall be used to prevent damage to the finish painted surface. These components shall be fastened to body using either a plastic insert into body metal with stainless steel screws or zinc coated nut-surts into body surface using stainless steel bolts to prevent corrosion from dissimilar metals.

ELECTROLYSIS CORROSION CONTROL

The vehicle shall be assembled using ECK brand or similar corrosion control compound on all high corrosion potential areas.

ECK protects aluminum and stainless steel against electrolytic reaction, isolates dissimilar metals and gives bedding protection for hardware and fasteners. ECK contains anti-seizing lubricant for threads. ECK is dielectric and perfect for use with electrical connectors.

PAINT FINISH - TWO COLOR

The body shall be painted with a two-tone color of PPG Delfleet® Evolution paint per approved customer spray-out.

Touch-up paint shall be provided with completed vehicle.

- Paint Color: Match cab/chassis supplied paint color.

BODY UNDERCOATING

The entire underside of body shall be sprayed with black automotive undercoating. Undercoating shall cover all areas underside of body and wheel well area to help prevent corrosion under the vehicle.

UNDERCOAT WARRANTY

The body undercoating shall have a warranty provided by the manufacturer for the lifetime of the vehicle or twenty (20) years, whichever occurs first. The warranty shall be transferable between vehicle owners. Should the undercoating material applied to the underside of the body and wheel wells of the vehicle ever flake off, peel, chip or crack due to drying out, the damaged area shall be re-sprayed without charge to the vehicle owner.

PAINT WARRANTY

The vehicle shall be provided with a ten (10) year non-prorated warranty to the original owner. Warranty is provided by PPG Inc. A warranty sheet with all conditions and maintenance procedures shall be provided with the delivered vehicle. **Pro-rated warranties will not be acceptable.**

COMPARTMENT INTERIOR FINISH

The compartment interior paintable surfaces shall be prepared and DA sanded using 80 grit dry paper and cleaned with a wax and grease remover.

A Scorpion rubberized spray-on XO2 rubberized coating formulation consisting of ZBG (Zero Biological Growth), Fire Retardant, High Pressure Polyurea Systems shall be applied to the horizontal floors and vertical wall surfaces. Scorpion material shall be light gray in color.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

ROOF COMPARTMENT INTERIOR FINISH

The roof compartment interior paintable surfaces shall be prepared and DA sanded using 80-120 grit dry paper and cleaned with a wax and grease remover.

A Scorpion rubberized spray-on XO2 rubberized coating formulation consisting of ZBG (Zero Biological Growth), Fire Retardant, High Pressure Polyurea Systems shall be applied to the horizontal floors and vertical wall surfaces. Scorpion material shall be light gray in color.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

REFLECTIVE STRIPE REQUIREMENTS

Material

All retroreflective materials shall conform to the requirements of ASTM D4956, *Standard Specification for Retroreflective Sheeting for Traffic Control*, Section 6.1.1 for Type I Sheeting.

All retroreflective materials used that are colors not listed in ASTM D4956, Section 6.1.1, shall have a minimum coefficient of retro-reflection of 10 with observation angle of 0.2 degrees and entrance angle of -4 degrees.

Any printed or processed retroreflective film construction used shall conform to the standards required of an integral colored film as specified in ASTM D4956, Section 6.1.1.

Minimum Requirements

A retroreflective stripe(s) shall be affixed to at least 50 percent of the cab and body length on each side, excluding the pump panel areas, and at least 25 percent of the width of the front of the vehicle, not including mirrors or other protrusions.

The stripe or combination of stripes shall be a minimum of 4 in. (100 mm) in total width.

The 4 in. (100 mm) wide stripe or combination of stripes shall be permitted to be interrupted by objects (i.e., receptacles, cracks between slats in roll up doors) provided the full stripe is seen as conspicuous when approaching the apparatus.

A graphic design shall be permitted to replace all or part of the required striping material if the design or combination thereof covers at least the same perimeter length(s).

GRAPHICS PROOF

A color graphics proof of the reflective striping layout shall be provided for approval by Honolulu Fire Department prior to installation. The graphics proof shall be submitted to Honolulu Fire Department on 8.5" x 11" sheets with front, sides, rear and plan views, each on one (1) sheet. In addition if there is any special art work an additional sheet shall be provided showing all details.

REFLECTIVE STRIPE - CAB SIDE

The reflective stripe material shall be 6" wide, 3M Scotchlite 680 series graphic film.

- This reflective stripe shall be white in color with ¼" black outline.

REFLECTIVE STRIPE - CAB FRONT

The reflective stripe material shall be 6" wide, 3M Scotchlite 680 series graphic film.

- This reflective stripe shall be white in color with ¼" black outline.

REFLECTIVE STRIPE - BODY SIDES

The reflective stripe material shall be 6" wide, 3M Scotchlite 680 series graphic film.

- This reflective stripe shall be white in color with ¼" black outline.

The stripe shall extend from the front of cab in a straight line, then just ahead of the rear wheels the stripe shall angle up and extend straight back to the rear of the body.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CHEVRON REFLECTIVE STRIPE - REAR SIDES PANELS

At least 50 percent of the rear-facing vertical surfaces, visible from the rear of the apparatus, excluding any pump panel areas not covered by a door, shall be equipped with retroreflective striping in a chevron pattern sloping downward and away from the centerline of the vehicle at an angle of 45 degrees. Each stripe shall be 6" width.

The rear side panels of the body on each side of a rear stairway or compartment shall have a chevron style reflective stripe, extending from bumper height up to side compartment drip rail height. Each chevron panel shall be a full sheet and shall have a 3M UV over laminate to protect from UV rays, scene damage, and everyday use. Chevron panel shall have a minimum 10 year warranty for material failure, and colorfastness.

The stripe material shall be 3M Diamond Grade.

In addition, a stripe shall be provided on interior of cab EMS cabinet doors.

This reflective chevron stripe shall alternate red and fluorescent yellow-green in color.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

LETTERING

GRAPHICS PROOF

A color graphics proof of the lettering layout shall be provided for approval by Honolulu Fire Department prior to installation. The graphics proof shall be submitted to Honolulu Fire Department on 8.5" x 11" sheets with front, sides, rear and plan views, each on one (1) sheet. In addition if there is any special art work an additional sheet shall be provided showing all details.

The following lettering shall be provided and installed on the completed unit as follows;

SIDE CAB DOOR LETTERING

There shall be seventy (70) 4" high reflective letters furnished and installed on the vehicle.

Front cab doors:

"HONOLULU" - Arched above Maltese

"FIRE DEPT." - Arched below Maltese

Rear cab doors:

"RESCUE" - Arched above unit number

"1" or "2" - Unit number

"TBD" - Community TBD at PCM. Arched below unit number.

- This reflective lettering shall be gold in color.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

UPPER BODY SIDE LETTERING

There shall be fourteen (14) 10" high reflective letters furnished and installed on the vehicle.

"RESCUE 1" or "2"

- This reflective lettering shall be red in color.

There shall be forty four (44) 3" high reflective letters furnished and installed on the vehicle.

"HONOLULU" - 3" high, Located on upper, behind rear wheel roll-up door, offset to front of door.

"FIRE" - 10" high, Located on upper, over wheel well roll-up door, centered.

"DEPARTMENT" - 3" high, Located on upper ahead of rear wheel roll-up door above main stripe.

- This reflective lettering shall be white in color with black outline.

There shall be forty (40) 5" high reflective letters furnished and installed on the vehicle.

"911" - 8" high, Centered below main reflective stripe.
"DON'T STALL" - 3" high
"CALL" - 3" high

"Pride - Service - Dedication" - 3" high cursive font, Centered at bottom of door.

- This reflective lettering shall be black in color.

REAR BODY LETTERING

There shall be seven (7) 4" high reflective letters furnished and installed on the vehicle.

"RESCUE 1" or "2"

- This reflective lettering shall be gold in color.

FRONT OF CAB LETTERING

There shall be seven (7) 3" high reflective letters furnished and installed on the vehicle.

"RESCUE 1" or "2"

- This reflective lettering shall be gold in color.

CAB ROOF LETTERING

There shall be two (2) 22" high reflective letters furnished and installed on the vehicle.

"R1" or "R2" - Smooth surface of upper cab roof.

- This reflective lettering shall be black in color.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

HFD MALTESE - 12"

One (1) HFD Scotchlite reflective gold 12" x 12" Maltese emblems shall be provided and located on front cab doors. The exact design and/or artwork shall be provided by the Honolulu Fire Department prior to construction.

One (1) copy of the above custom logo shall be provided and located on front cab doors and rear roll-up door, as directed by Honolulu Fire Department.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

EXTERIOR COMPARTMENT DOORS

ROLL-UP DOOR CONSTRUCTION - ROBINSON (ROM)

The vehicle shall be equipped with R•O•M Series IV roll-up exterior compartment doors. The R•O•M roll-up doors shall be complete with the following features;

Each shutter slat, track, bottom rail, and drip rail shall be constructed from anodized 6063 T6 aluminum. Shutter slats shall feature a double wall extrusion 0.315" thick with a concave interior surface to minimize loose equipment jamming the shutter door closed. Shutter slats shall feature an interlocking end shoe to prevent side to side binding of the shutter door during operation. Slat must have interlocking joints with an inverted locking flange. Slat inner seal shall be a one piece PVC extrusion; seal design will be such to prevent metal to metal contact while minimizing dirt and water from entering the compartment.

Shutter door track shall be one piece design with integral overlapping flange to provide a clean finished look without the need of caulk. Door track shall feature an extruded Santoprene rubber double lip low profile side seal with a silicone co-extruded back to reduce friction during shutter operation.

Shutter bottom rail shall be a one piece double wall extrusion with integrated finger pull. Finger pull shall be curved upward with a linear striated surface to improve operator grip while operating the shutter door. Bottom rail shall have a smooth contoured interior surface to prevent loose equipment from jamming the shutter door. Bottom rail seal shall be made from Santoprene; it will be a double "V" seal to prevent water and debris from entering compartment. Bottom rail lift bar shall be a one piece "D" shaped aluminum extrusion with linear striations to improve operator grip during operation. Lift bar shall have a wall thickness of 0.125". Lift bar shall be supported by no less than two pivot blocks; pivot blocks shall be constructed from Type 66 Glass filled reinforced nylon for superior strength. Bottom rail end blocks shall have incorporated drain holes which will allow any moisture that collects inside the extrusion to drain out.

Shutter door shall have an enclosed counter balance system. Counter balance system shall be 4" in diameter and held in place by two (2) heavy duty 18 gauge zinc plated plates. Counter balance system shall have two (2) over-molded rubber guide wheels to provide a smooth transition from vertical track to counter balance system; no foam material of any kind shall be permitted or used in this area.

ROM DOOR BOTTOM RAIL

All exterior compartment doors shall have the standard 3.0" tall bottom rail extrusion for easy one (1) hand opening and closing.

The specified retroreflective stripe material shall be applied on the roll-up compartment doors. The stripe shall be precision machine cut for each door slat of the roll-up doors. Under no circumstance will the stripe material be cut on roll-up door surface.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

BODY HEIGHT MEASUREMENTS

The vertical body dimensions shall be as follows:

AHEAD OF REAR AXLE

	<u>Description</u>	<u>Dimension</u>
A	Bottom of Subframe to Top of Body	83.7"
B	Bottom of Subframe to Bottom of Body	22.5"
C	Total Body Height	106.2"
D	Compartment Height Above Frame	48.0"
E	Compartment Height Below Frame	25.0"
F	Vertical Door Opening:	
	-with roll-up door	65.0"
	-with hinged door	68.5"

ABOVE REAR AXLE

	<u>Description</u>	<u>Dimension</u>
G	Vertical Door Opening - Above Rear Wheel	
	-with roll-up door	34.0"
	-with hinged door	37.5"

BEHIND REAR AXLE

	<u>Description</u>	<u>Dimension</u>
H	Bottom of Subframe to Bottom of Body	20.0"
I	Compartment Height Above Frame	48.0"
J	Compartment Height Below Frame	22.5"
K	Vertical Door Opening:	
	-with roll-up door	62.0"
	-with hinged door	65.5"

GENERAL

	<u>Description</u>	<u>Dimension</u>
L	Top of Body to Bottom of Drip Rail	33.5"

(Dimensions are approximate and subject to change during construction or design process.)

Honolulu Fire Department

Production Specifications – SVI #1090-1091

THREE (3) UPPER BODY COMPARTMENTS (OPEN)

The forward transverse compartment shall be 90.0" long x 27.0" wide x 28.5" deep. There shall be two (2) compartments parallel to the sides of the body, one (1) on each side. Each of these compartments shall be 103.0" long x 28.0" wide x 28.5" deep. The side compartments shall be open under each door sill to allow for long equipment. Each compartment shall be integral with the body construction, and will not be bolted or add-on modules. The outside walls of each compartment will be double walled to prevent equipment from denting the outside painted surface.

Each compartment shall have a lift-up type compartment door hinged on the outboard side. Each door shall be fabricated from 3/16" aluminum tread plate. Each door shall have two (2) pneumatic type cylinders, one (1) at each end, attached to cast aluminum brackets mounted to the interior surface of the door to hold the door in both the opened and closed positions. Each door shall be mounted using multiple 16" long, equally spaced, 14 gauge stainless steel hinges, with 1/4" stainless steel pin. A polyester barrier film gasket shall be placed between stainless steel hinge and the body mounting surface as necessary to prevent corrosion caused by dissimilar metals.

Each compartment door shall overlap a 2" vertical lip on the body roof to prevent entry of moisture and sealed with automotive type rubber molding to provide a weather resistant seal.

Each compartment shall have a 13/16" drain hole located in floor of compartment with a 1" flexible drain tube that terminates below body.

Each compartment shall have a horizontally mounted OnScene Solutions LED light on the underside of the door. The light and NFPA door ajar system shall be automatically activated by an individual switch per compartment.

NO compartment door chrome handles shall be provided on each door.

The Honolulu Fire Department supplied second stokes basket shall be mounted to underside of front transverse compartment door.

The hinged door(s) shall have an automotive tailgate style lift-up handle. A manual key lock and electric lock shall be provided. A gasket shall be placed between the handle and the compartment exterior wall. Door latches shall be a single point, double-catch latch, mounted on the interior wall of the compartment panel.

Locks shall be keyed same as lower ROM doors.

STOKES BASKET STORAGE

One (1) Honolulu Fire Department supplied stokes basket, 7.25" x 24" x 84" long shall be stored in upper outboard rear curbside compartment (Western Mule crane will mount along inboard side). Dimensions to be confirmed at pre-construction meeting.

SIDE ROOF UPPER COMPARTMENT STORAGE

Heavy duty aluminum angles shall be welded to upper side walls of the upper body compartments on streetside to allow for storage of removable poly bin storage (future).

Honolulu Fire Department

Production Specifications – SVI #1090-1091

BOOM CRANE

A Western Mule telescopic boom crane shall be provided and mounted in upper forward walkway area. The 10 x 10 base shall be permanently mounted in walkway and crane shall be stored in an adjacent roof top compartment. Ramp the floor material around the crane mounting base.

Model :	P10-DC
Winch Type	12V-DC
Lifting Capacity	1000 Lbs.
Lifting Height Max. Std. (base to hook)	72"
Storage Height Folded (from base)	52"
Reach Max. (from center of rotation)	60"
Rotation (continuous) with Brake	360° Manual
Lifting Cable	20' x 3/16"
Line Speed (feet/min) No Load / Load	16 / 6
Power Requirements	12V-DC 70 amps
Controls	10' Remote
Mounting Base	10" x 10"
Mounting Bolt Hole Pattern	7" x 7"
Finish	Powder Coated
Weight of Crane / Shipping Weight (Lbs)	132 / 170
Warranty (excluding lifting cable)	1-Year

EQUIPMENT MOUNTING

The following Honolulu Fire Department supplied equipment shall be mounted in this compartment. To be discussed in detail at pre-construction meeting.



Honolulu Fire Department

Production Specifications – SVI #1090-1091

SIDE ROOF COMPARTMENT - SHELF TRAC

The upper body side compartments shall be provided with horizontally mounted aluminum Shelf-Trac welded to the walls for vertical partition installation and adjustability.

ROOF COMPARTMENT - VERTICAL PARTITION

There shall be four (4) vertical partition(s) provided in the roof compartment(s). The partition(s) shall be used to retain or hold equipment in place during travel. Each partition shall be fabricated from 3/16" smooth aluminum and bolted to specified Shelf-Trac for ease of adjustment.

Divider located in rear curbside compartment shall be full length of compartment for specified stokes basket, and portable Western Mule crane.

UPPER BODY WALKWAY

A 34" wide, upper body walkway shall be provided at the center of body and recessed into the roof structure. The walkway shall be fabricated from NFPA compliant 3/16" aluminum tread plate with continuously welded cross seams to prevent moisture penetration into apparatus body, No Exceptions. The walkway shall be supported with 2" x 2" tubing on 14" - 22" centers.

13/16" drains shall be installed at front of walkway connected to 1" flexible drain tubes that will terminate below the body.

WALKWAY/STEP LIGHTS

There shall be two (2) OnScene Solutions Rough-Service 9" LED lights provided to illuminate the walkway or step area. The lights shall be activated when the parking brake is set.

Each light shall be mounted in an extruded aluminum housing to protect against damage from personnel or equipment.

Lighting shall provide illumination at a minimum level of 2 fc (20 lx) on all work surfaces, steps, and walkways. Lighting shall be switchable but activated automatically when the vehicle park brake is set.

ROOF ACCESS STAIRWAY

The rear of the body shall be provided with a minimum 34" wide roof access stairway recessed into the side rear compartments. Stairs treads shall be 9 1/2" minimum depth and formed from 3/16" NFPA compliant aluminum tread plate with uniformed riser height design. Stair treads will be continuously welded into side walls. Bolt-in tread design will not be acceptable.

Roll-out ladder design requiring set-up time and 8 plus feet behind apparatus or vertical ladders that do not allow firefighter to safely ascend or descend with equipment will not be acceptable.

STAIRWAY HANDRAILS

There shall be two (2) handrails provided, one (1) on each side wall of recessed center stairway providing three-points of contact at all times for safer access to roof compartments. The handrails shall be angled for optimum use during ingress or egress of the upper walkway area.

Handrails shall be NFPA compliant 1-1/4" knurled 304 stainless steel with welded end stanchions.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

STAIR TREAD SAFETY DELINEATION

For increased visibility and safety, the front edge of walkway at top of stairway and each step including the front edge of bumper shall have two (2) rows of red reflective squares provided between the diamond pattern of stepping surface to delineate stair tread edges.

WALKWAY/STEP LIGHTS

There shall be two (2) OnScene Solutions Rough-Service 9" LED lights provided to illuminate the walkway or step area. The lights shall be activated when the parking brake is set.

Each light shall be mounted in an extruded aluminum housing to protect against damage from personnel or equipment.

Lighting shall provide illumination at a minimum level of 2 fc (20 lx) on all work surfaces, steps, and walkways. Lighting shall be switchable but activated automatically when the vehicle park brake is set.

STEP COMPARTMENT(S) - LOWER

There shall be two (2) compartment(s) located in the roof access stairway area below frame level. Each compartment shall have a horizontally hinged brushed stainless steel door with a D-ring handle. Each compartment shall be manufactured to prevent road debris, dirt and moisture from entering the enclosure. Each compartment(s) shall be 33" wide x 12" high x maximum depth based on chassis mounted components and requirements for structural integrity of the body.

Each compartment shall have an OnScene LED light that shall automatically activate when the door is opened and wired to the NFPA required hazard warning light provided in the cab.

- The hinged door(s) shall have a stainless steel 6" offset bent D-ring locking handle. A gasket shall be placed between handle and door. Door latch shall be a single point latch flush mounted to exterior door panel.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

STEP COMPARTMENT WITH SINGLE LIFT-UP DOOR - INTERMEDIATE

Access to the rear compartment shall be through a door that serves a dual purpose. The door shall be a lift-up style, which shall be constructed in a stair tread/riser design to provide access to the upper body compartment storage area.

The three (3) treads and risers above chassis frame in the roof access stairway shall be a one-piece vertical lift-up door. Compartment shall have a horizontally hinged door fabricated to incorporate the stair treads and risers with a D-ring handle and dual gas cylinder struts to hold door in open position. Door shall seal on the stair tread and riser surfaces to prevent dirt, road debris, and moisture from entering the compartment. The compartment shall be approximately 33" wide x 35" high x depth varies up to front wall of the rear transverse compartment. The door opening, due to side walkway wall hand railing will be approximately 24" wide x 35" vertically.

Compartment shall have an OnScene LED light that shall be automatically activated when the door is opened and wired to the NFPA required hazard warning light provided in the cab.

This compartment shall store Honolulu Fire Department supplied chain saw, rescue saw, and three (3) 1 gallon fuel cans.

- The hinged door(s) shall have a stainless steel 6" offset bent D-ring locking handle. A gasket shall be placed between handle and door. Door latch shall be a single point latch flush mounted to exterior door panel.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.

STEP COMPARTMENT - UPPER

There shall be one (1) upper compartment located directly below walkway area. The compartment shall have a horizontally hinged brushed stainless steel door with a D-ring handle. The compartment shall be manufactured to prevent road debris, dirt and moisture from entering the enclosure. The compartment shall be approximately 26" wide x 8" high x maximum depth available

Each Compartment shall have an OnScene LED light that shall be automatically activated when the door is opened and wired to the NFPA required hazard warning light provided in the cab.

Devices to secure equipment, compartment dividers, or UHMW plastic angles, or sheeting will be used for storage of specified equipment as required to prevent damage to equipment.

- The hinged door(s) shall have a stainless steel 6" offset bent D-ring locking handle. A gasket shall be placed between handle and door. Door latch shall be a single point latch flush mounted to exterior door panel.
- One (1) Honolulu Fire Department supplied stokes basket, 7.25" x 24" x 84" long. Dimensions to be confirmed at pre-construction meeting.

REAR BODY HANDRAILS

There shall be two (2) 24" vertical handrails on rear body. Handrails shall be NFPA compliant 1-1/4" knurled 304 stainless steel with welded end stanchions.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

BODY WIDTH DIMENSIONS

The walk thru body shall be 100.0" wide, and 102.0" wide at drip rails. Interior compartment depth dimensions shall be approximately:

<u>Area Description</u>	<u>Dimension</u>
Transverse above subframe	95.0" (If specified.)
Compartment depth above subframe	31.0" (To walkway wall.)
Compartment depth below subframe	24.5"
Walkway width	34"

Honolulu Fire Department

Production Specifications – SVI #1090-1091

STREETSIDE COMPARTMENT - FRONT (S1)

The interior useable compartment width shall be approximately 41.5" wide.

An opening in back wall of compartment shall make specified shelving accessible from interior walk-in area.

The compartment door opening shall be approximately 34.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door slats and the door track components shall be painted to match the single tone exterior color.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- The roll-up doors shall be equipped with an electric power lock system. All doors shall be locked or unlocked with activation from a single switch located in the cab.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) adjustable shelf/shelves approximately 24" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edge.
 - The above component(s) shall have a smooth un-painted finish.
- There shall be two (2) adjustable shelf/shelves approximately 28" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges.
- Shelving used to store fire fighter PPE gear bags.
 - The above component(s) shall have a smooth un-painted finish.
- The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
- Two (2) OnScene Access LED, full height compartment lights, vertically mounted.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

- One (1) OnScene 8" Access LED ground light(s) shall be provided below the body.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

STREETSIDE COMPARTMENT - AHEAD OF REAR WHEELS (S2)

The interior useable compartment width shall be approximately 41.5" wide.

The compartment door opening shall be approximately 34.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door slats and the door track components shall be painted to match the single tone exterior color.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- The roll-up doors shall be equipped with an electric power lock system. All doors shall be locked or unlocked with activation from a single switch located in the cab.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) adjustable shelf/shelves approximately 24" deep located below frame area on forward side of vertical partition. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edge. Shelf shall store Honolulu Fire Department supplied rope rescue bags.
 - The above component(s) shall have a smooth un-painted finish.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

- There shall be one (1) SlideMaster SM3 series structural steel slide-out tray(s) with 100% extension rated for 1,000 lbs. with a base approximately 47" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 1/2". Front of tray will be 1 1/2" high using radius for transition.
 - The SlideMaster tray base shall be wet painted silver in color.
 - The SlideMaster tray base shall have a gravity type latch mechanism which requires the manual rotation to unlock and lock.
 - Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
 - The above component(s) shall have a smooth un-painted finish.
- There shall be one (1) SlideMaster SMT series structural steel slide-out and tilt-down tray(s) with 90% extension rated for 250 lbs. with a base approximately 46" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and will be vertically adjustable in height. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 1/2". Front of tray will be 1 1/2" high using radius for transition.
 - The SlideMaster tray base shall be wet painted silver in color.
 - The SlideMaster tray base shall have a gravity type latch mechanism which requires the manual rotation to unlock and lock.
 - The above component(s) shall have a smooth un-painted finish.
- There shall be one (1) bolt-in vertical compartment partition(s) provided dividing the compartment into left and right sides below frame area. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
 - The above component(s) shall have a smooth un-painted finish.
- There shall be three (3) Zico 1000 series KD-UH walkaway type SCBA air pack bracket(s) with high cycle coated spring clips and angled foot plate (no CRS strap inc.) located on specified slide-out tray of forward side of vertical partition. Clips shall be for Honolulu Fire Department MSA air packs.
- The following Honolulu Fire Department supplied equipment shall be mounted in this compartment. To be discussed in detail at pre-construction meeting.
- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- Two (2) OnScene Access LED, full height compartment lights, vertically mounted.
- One (1) OnScene 8" Access LED ground light(s) shall be provided below the body.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

D2

Aztec Kit
Carabiners
600 ft. Rope
300 ft. Rope
150 ft. Rope
50 ft. Anchor Rope
Omni Double Pulley
Omni Single Pulley
MPD
Anchor Plates
7mm Prusiks Long Green
7mm Prusiks Short Red
Edge Protection
Figure 8 Descender/Scarab/
Rack
Orange Webbing 1" x 30'
Orange Webbing 1" x 20'
Blue Webbing 1" x 15'
Yellow Webbing 1" x 12'
Green Webbing 1" x 5'
CMC Class III Harness
Diapers
Pick-off straps
Anchor Straps 15'
8mm Accessory cord
ASAP
Petzl Ascension
Gibb's Ascender
Load Releasing Device
Halyard
CMC CSR2 Pulley
Commercial Victim Chest/
peMC harness
Stokes litter External lashing
Spider Straps
Throw line
Utility rope
Double PMP
Single PMP
Dog Harness
Tri-links
KEDS
Bypass lanyard

Honolulu Fire Department

Production Specifications – SVI #1090-1091

STREETSIDE COMPARTMENT - ABOVE REAR WHEELS (S3)

The interior useable compartment width shall be approximately 59.5" wide.

The compartment door opening shall be approximately 52.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door slats and the door track components shall be painted to match the single tone exterior color.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- The roll-up doors shall be equipped with an electric power lock system. All doors shall be locked or unlocked with activation from a single switch located in the cab.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.


COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) SlideMaster SM3 series structural steel slide-out tray(s) with 100% extension rated for 1,000 lbs. with a base approximately 47" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 1/2". Front of tray will be 1 1/2" high using radius for transition.
 - The SlideMaster tray base shall be wet painted silver in color.
 - The SlideMaster tray base shall have a gravity type latch mechanism which requires the manual rotation to unlock and lock.
 - The above component(s) shall have a smooth un-painted finish.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

- There shall be one (1) SlideMaster SMT series structural steel slide-out and tilt-down tray(s) with 90% extension rated for 250 lbs. with a base approximately 47" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and will be vertically adjustable in height. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½". Front of tray will be 1 ½" high using radius for transition.
 - The SlideMaster tray base shall be wet painted silver in color.
 - The SlideMaster tray base shall have a gravity type latch mechanism which requires the manual rotation to unlock and lock.
 - The above component(s) shall have a smooth un-painted finish.
- The following Honolulu Fire Department supplied equipment shall be mounted in this compartment. To be discussed in detail at pre-construction meeting.
- Two (2) OnScene Access LED, full height compartment lights, vertically mounted.
- There shall be one (1) Blue Sea Systems 100 amp ST Series blade type fuse block with screw type terminals for both positive and negative buss with cover provided for distribution of up to six (6) 30 amp, 12 VDC circuits. Fuse block shall be located per required circuits and be protected from damage. For Honolulu Fire Department supplied Thermal Imaging Camera, Akron Revel Scout lights, and hand lights.



Honolulu Fire Department

Production Specifications – SVI #1090-1091

STREETSIDE COMPARTMENT - REAR (S4)

The interior useable compartment width shall be approximately 49.5" wide.

The compartment door opening shall be approximately 42.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door slats and the door track components shall be painted to match the single tone exterior color.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- The roll-up doors shall be equipped with an electric power lock system. All doors shall be locked or unlocked with activation from a single switch located in the cab.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be three (3) adjustable shelf/shelves approximately 30" deep located on aft side of vertical partition. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges.
 - The above component(s) shall have a smooth un-painted finish.
- There shall be two (2) OnScene Solutions 85 series aluminum slide-out vertical tool board(s) with 100% extension, and rating of 1,000 lbs. approximately 24" deep. Each tool board shall be mounted on an OnScene Solutions slide frame constructed of anodized aluminum extrusion(s). Each slide shall have a cable operated, spring loaded latch complimented by a red "T" handle (Pull to Release). The slide shall lock in the closed and full extension positions.
 - The vertical tool board material shall be 3/16" (.188) 3003H-14 aluminum alloy sheet.
 - The above component(s) shall have a smooth un-painted finish.
 - Each tool board shall be horizontally adjustable; mounted on aluminum shelf Trac on compartment floor.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

- There shall be one (1) bolt-in vertical compartment partition(s) provided dividing the compartment into left and right sides. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
 - The above component(s) shall have a smooth un-painted finish.
- The following Honolulu Fire Department supplied equipment shall be mounted in this compartment. To be discussed in detail at pre-construction meeting.
- The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
- Two (2) OnScene Access LED, full height compartment lights, vertically mounted.
- There shall be one (1) 120 VAC outlet(s) located in compartment on the lower rear wall. For Honolulu Fire Department supplied Hurst tools.
 - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
 - Outlet(s) shall be powered by both the on-board inverter and shore power system through a relay system.
- Mounts will be supplied and installed for one (1) Honolulu Fire Department supplied Hurst E-Draulic hydraulic ram(s).
- Mounts will be supplied and installed for one (1) Honolulu Fire Department supplied Hurst E-Draulic hydraulic cutter(s).
- Mounts will be supplied and installed for one (1) Honolulu Fire Department supplied Hurst E-Draulic hydraulic spreader(s).
- One (1) OnScene 8" Access LED ground light(s) shall be provided below the body.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.



Honolulu Fire Department

Production Specifications – SVI #1090-1091

CURBSIDE COMPARTMENT - FRONT (C1)

The interior useable compartment width shall be approximately 41.5" wide.

An opening in back wall of compartment shall make specified shelving accessible from interior walk-in area.

The compartment door opening shall be approximately 34.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door slats and the door track components shall be painted to match the single tone exterior color.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- The roll-up doors shall be equipped with an electric power lock system. All doors shall be locked or unlocked with activation from a single switch located in the cab.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) bolt-in shelf approximately 24" deep located directly above the portable winch on floor. Shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edge.
 - The above component(s) shall have a smooth un-painted finish.
- There shall be three (3) adjustable shelf/shelves approximately 28" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges.
 - The above component(s) shall have a smooth un-painted finish.
- The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
- Two (2) OnScene Access LED, full height compartment lights, vertically mounted.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

- The cab tilt control pendant.
- The specified portable winch shall be mounted in compartment using a heavy duty "U" shaped channel. Winch receiver tube and mounting pin shall be utilized to hold in place during travel.
- One (1) OnScene 8" Access LED ground light(s) shall be provided below the body.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CURBSIDE COMPARTMENT - AHEAD OF REAR WHEEL (C2)

The interior useable compartment width shall be approximately 41.5" wide.

The compartment door opening shall be approximately 34.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door slats and the door track components shall be painted to match the single tone exterior color.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- The roll-up doors shall be equipped with an electric power lock system. All doors shall be locked or unlocked with activation from a single switch located in the cab.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) SlideMaster SM3 series structural steel slide-out tray(s) with 100% extension rated for 1,000 lbs. with a base approximately 47" deep and as wide as the compartment layout or door opening permits located above the chassis frame rails. It shall be vertically adjustable in height. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½". Front of tray will be 1 ½" high using radius for transition.
 - The SlideMaster tray base shall be wet painted silver in color.
 - The SlideMaster tray base shall have a gravity type latch mechanism which requires the manual rotation to unlock and lock.
 - The above component(s) shall have a smooth un-painted finish.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

- There shall be one (1) SCUBA cylinder storage module for 8" OD (maximum) SCUBA bottles. The maximum length of the SCUBA cylinder shall be 24.75". The module shall have an exterior shell fabricated from 1/8" (.125) 3003H-14 aluminum alloy sheet. The module shall have a 2" slope, front to back to prevent cylinders from sliding out. The SCUBA cylinder storage tubing shall be fabricated from PVC pipe to prevent damage or abrasion to cylinders. In addition there shall be rubber matting provided in the base of each storage tube for bottle protection and to prevent slipping.
 - The SCBA cylinder module shall be capable of storing ten (10) SCBA cylinders up to 7.5" diameter.
- A rope storage module shall be provided in upper forward corner of compartment for storage of three (3) rope bags approximately 9" H x 4" W x 16" D. Module shall be approximately 9.5" H x 4.5" W x 24" D.
- The following Honolulu Fire Department supplied equipment shall be mounted in this compartment. To be discussed in detail at pre-construction meeting.
- The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
- Two (2) OnScene Access LED, full height compartment lights, vertically mounted.
- One (1) OnScene 8" Access LED ground light(s) shall be provided below the body.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

C2
6pcs-COMPENSATOR BUOYANCY OCEANIC BCD PROBE LX/APEKS 2 pcs-Dive Regulator/1st & 2nd Stage/dive console w/ compass/air supply gauge (BAG) BELT DIVE WITH 2 EA- 2# & 3# WEIGHT 15 pcs-TANK SCUBA FABER HX 80 3442 PSI 5 pcs-JACKET DIVE XCEL TITANIUM XL KIT COMMUNICATIONS OTS MK-7 BUDDY LINE ADAPTER COMMUNICATION Y FOR MK-7 BUDDY LINE BAG ROPE COMM BLU 10MM X 200 FT BAG ROPE COMM RED 10MM X 200 FT BAG ROPE COMM YELLOW 10MM X 200 FT BAG ROPE SEARCHLINE YELL W/ 200 FT POLY ROPE, SNAP SHACKLES, OCTO HOLDER DRY SUIT BAG W/ FFM, FINS, HARNESS, COMMS COMMS/FFM BAGS Dive Harness READY PACK BACK SCUBA 2-DPV Units

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CURBSIDE COMPARTMENT - ABOVE REAR WHEEL (C3)

The interior useable compartment width shall be approximately 59.5" wide.

The compartment door opening shall be approximately 52.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door slats and the door track components shall be painted to match the single tone exterior color.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- The roll-up doors shall be equipped with an electric power lock system. All doors shall be locked or unlocked with activation from a single switch located in the cab.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.


COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) SlideMaster SM3 series structural steel slide-out tray(s) with 100% extension rated for 1,000 lbs. with a base approximately 47" deep and as wide as the compartment layout or door opening permits located above the level of the chassis frame rails. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½". Front of tray will be 1 ½" high using radius for transition.
 - The SlideMaster tray base shall be wet painted silver in color.
 - The SlideMaster tray base shall have a gravity type latch mechanism which requires the manual rotation to unlock and lock.
 - The above component(s) shall have a smooth un-painted finish.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

- There shall be one (1) SlideMaster SMT series structural steel slide-out and tilt-down tray(s) with 90% extension rated for 250 lbs. with a base approximately 47" deep and as wide as the compartment layout or door opening permits. It shall be located above the level of the chassis frame rails and will be vertically adjustable in height. Each tray shall be fabricated from 3/16" 3003 aluminum sheet and shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½". Front of tray will be 1 ½" high using radius for transition.
 - The SlideMaster tray base shall be wet painted silver in color.
 - The SlideMaster tray base shall have a gravity type latch mechanism which requires the manual rotation to unlock and lock.
 - The above component(s) shall have a smooth un-painted finish.
- The following Honolulu Fire Department supplied equipment shall be mounted in this compartment. To be discussed in detail at pre-construction meeting.
- Two (2) OnScene Access LED, full height compartment lights, vertically mounted.
- There shall be one (1) 120 VAC outlet(s) located in compartment on the forward wall for charging Honolulu Fire Department RIT equipment.
 - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
 - Outlet(s) shall be powered by both the shore power and specified inverter through a relay system.

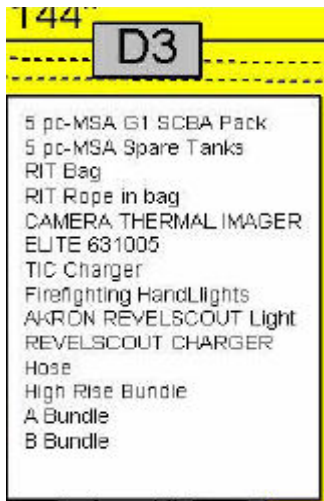

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CURBSIDE COMPARTMENT - REAR (C4)

The interior useable compartment width shall be approximately 49.5" wide.

The compartment door opening shall be approximately 42.2" wide.

This compartment shall have a R•O•M series IV roll-up door.

- The roll-up door slats and the door track components shall be painted to match the single tone exterior color.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior lower door track.
- The roll-up doors shall be equipped with an electric power lock system. All doors shall be locked or unlocked with activation from a single switch located in the cab.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- A compartment threshold protection plate shall be installed on the bottom edge of the compartment door opening. The threshold protection shall be fabricated from an aluminum extrusion with an anodized exterior finish.

COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be three (3) adjustable shelf/shelves approximately 24" deep located below frame level. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edge.
 - The above component(s) shall have a smooth un-painted finish.
- There shall be two (2) adjustable shelf/shelves approximately 30" deep above frame level. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges.
 - The above component(s) shall have a smooth un-painted finish.
- There shall be one (1) air bag storage module(s). The module shall be fabricated from 1/8" (.125) 3003H-14 aluminum alloy sheet. Circular notches shall be provided along the front edge to ease the access to the air bags. Each bay shall be sized to hold the Paratech Maxi-Force air bags as follows; (1) 20" x 20" x 2", (2) 20" x 26" x 2", (2) 42" x 15" x 2", (1) 12" x 18" x 2", (1) 10" x 10" x 2", and (1) 6" x 12" x 2". In addition (1) Multi-Force bag, and (1) Grip hoist will be built into module.
- The following Honolulu Fire Department supplied equipment shall be mounted in this compartment. To be discussed in detail at pre-construction meeting.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

- The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
- Two (2) OnScene Access LED, full height compartment lights, vertically mounted.
- There shall be one (1) 120 VAC outlet(s) located in compartment on the lower rear wall.
 - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
 - Outlet(s) shall be powered by both shore power and specified inverter through a relay system.
- One (1) OnScene 8" Access LED ground light(s) shall be provided below the body.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.



ROOF ACCESS STAIRWAY

The rear of the body shall be provided with a recessed center stairway in lieu of a compartment.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

UPPER BODY COMPARTMENT - CURBSIDE

Above the exterior curbside compartments shall be an upper body compartment for storage of long equipment. The compartment shall be integral with the body construction and will not be bolted or added on modules. The outside walls of compartment will be double walled to prevent equipment from denting the outside painted surface. The compartment shall be approximately (insert actual dimensions).

Access to the compartment shall be from a rear facing lift-up compartment door. Door shall be fabricated from 3/16" smooth aluminum with full length 14 gauge stainless steel hinge, with 1/4" stainless steel pin, 6" non-locking stainless steel "D" ring handle, and a gas cylinder door holder. A polyester barrier film gasket shall be placed between stainless steel hinge and any dissimilar metals as necessary to prevent corrosion. Door shall overlap body surface to prevent entry of moisture and sealed with automotive type rubber molding to provide a weather resistant seal.

Compartment shall have a flush mounted light near door opening that will be automatically activated when door is opened and wired to compartment door ajar warning light provided in cab.

Devices to secure equipment, compartment dividers, or UHMW plastic angles, or sheeting will be used for storage of specified equipment as required to prevent damage to equipment.

A step shall be provided above bumper directly below compartment to assist in access to compartment storage. Step shall be fabricated from NFPA compliant aluminum treadplate with minimum 8" depth, width sized to fit space available.

The compartment will be designed to store the following equipment;

- The Honolulu Fire Department supplied custom sized surf board with removeable skeg shall be stored in this compartment.

ROOF ACCESS HANDRAIL

There shall be one (1) 24" horizontal handrail on rear of body. Handrail shall be NFPA compliant 1-1/4" knurled 304 stainless steel with welded end stanchions.

A safety sign FAMA23, which warns of the proper climbing method, shall be visible to personnel entering the cab and at each designated climbing location on the body.

A safety sign FAMA24, which warns personnel not to ride on the vehicle, shall be located at the rear step areas and at any cross walkways.

PLASTIC FLOOR AND SHELF TILE

All compartment floors, shelves, and trays shall be covered with Dri-Dek plastic interlocking grating.

- The plastic floor tile shall be black.
- The plastic edge trim shall be yellow.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

ROPE ANCHOR OR PORTABLE WINCH RECEIVERS

The completed unit shall have an integrated receiver or anchor system for use with removable rope anchor point and/or a portable electric winch, when specified.

Receivers or anchors installed at any location on the apparatus for use as removable winch anchors shall be designed and affixed to provide at least a 2.0 to 1 straight line pull no-yield safety factor over the load rating of the removable winch.

Receivers or anchors installed at any location on the apparatus for use with rope operations shall be designed and affixed to the apparatus to provide at least a 9,000 lbf (40,000 N) no-yield condition with a straight line pull.

A safety sign FAMA28 shall be located on or near each receiver or anchor stating the maximum straight line pull rating.

Side receiver(s) (if specified) shall have the following load rating:

	<u>STRAIGHT PULL</u>	<u>SAFETY FACTOR</u>
Rope Tie Off:	600 Lbs.	15:1
Winch:	5,000 Lbs.	2:1

Front and/or rear receiver(s) (if specified) shall have the following load rating:

	<u>STRAIGHT PULL</u>	<u>SAFETY FACTOR</u>
Rope Tie Off:	600 Lbs.	15:1
Winch:	Winch Load Rating (9,000 Lbs. Max)	2:1

The following items shall be provided to accomplish rope rescue and/or portable winch operation;

ROOF LOCATIONS

- Two (2) rope anchor point receiver(s) shall be provided and located on outboard edges of body roof area. The receiver(s) shall be manufactured using 2" x 2" x 1/4" wall steel trailer style receiver tube welded to 6" x 4" x 1/2" thick steel plate base and bolted to body structure. Anchor point will add 3-1/4" to body height and does not extend beyond body (without anchor point). The receiver assembly shall have a black hammertone powder coat paint finish. Each receiver location shall have a stainless steel scuff plate to protect paint on upper body. Reinforcements to body shall be added as necessary to increase the structural integrity and to provide a working weight rating of 600 lbs., with a 9,000 lbs. maximum load based upon using a 15:1 safety factor to match typical 1/2" rescue rope ratings.

ACCESSORIES

- Two (2) removable rope anchor(s) shall be provided with completed vehicle. Each rope anchor shall be fabricated from 3/4" steel, 2" high x 11.5" long with a multi-hole anchor plate (Similar to CMC). Eyelet end shall have radiused edge to prevent damage to rope or carabineer. Each rope anchor shall have a black hammertone powder coat paint finish. A steel 5/8" x 3" hitch pin shall lock the rope anchor into the receiver tube.
- Two (2) removable rope anchor(s) shall be provided with completed vehicle. Each rope anchor shall be fabricated from 3/4" steel, 2" high x 11.5" long with a 3" OD/2" ID eyelet. Eyelet end shall have radiused edge to prevent damage to rope or carabineer. Each rope anchor shall have a black hammertone powder coat paint finish and a steel 5/8" hitch pin to lock it in place. An aluminum mounting bracket shall be provided to store rope anchor(s) inside a body compartment as close to receiver location as possible.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

PORTABLE WINCH

- One (1) Ramsey model QM9000, 9,000 lb. 12 volt electric winch shall be furnished with the completed unit. It shall be capable of being stored in a compartment and mounted to the apparatus by inserting the mounting point into a properly rated receiver. A minimum of 105' of 5/16" stranded galvanized steel cable with pinned utility hook shall be installed on the drum. A 25' remote control shall be provided with the assembly that permits the operator to stand at a safe operating distance from the cable and winch.

FRONT BUMPER

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with a black hammertone powder coat paint finish located at the front bumper for use with removable rope anchor point and/or a portable electric winch (if specified).
 - There shall be one (1) 12 VDC plug(s) with quick connect provided to power a Ramsey portable winch. All 12 VDC cables to be sized according to Ramsey and installation for intended use.
 - The receiver(s) shall have one (1) rubber cover(s) provided.

STREETSIDE WHEEL WELL

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with black hammertone powder coat paint finish located on the streetside of the body in the forward wheel well panel area for use with removable rope anchor and/or a portable electric winch (when specified).
 - There shall be one (1) 12 VDC plug(s) with quick connect provided to power a Ramsey portable winch. All 12 VDC cables to be sized according to Ramsey and installation for intended use.
 - One (1) 12" x 2" M x 2" F winch mounting adapter(s) shall be provided. Winch adapter will extend the specified portable winch 6" from receiver. An aluminum mounting bracket shall be provided to store winch adapter(s) inside a body compartment as close to receiver location as possible.
 - The receiver(s) shall have one (1) rubber cover(s) provided.

CURBSIDE WHEEL WELL

- There shall be one (1) 2" x 2" x 1/4" wall steel receiver tube(s) with black hammertone powder coat paint finish located on the curbside of the body in the forward wheel well panel area for use with removable rope anchor and/or a portable electric winch (when specified).
 - There shall be one (1) 12 VDC plug(s) with quick connect provided to power a Ramsey portable winch. All 12 VDC cables to be sized according to Ramsey and installation for intended use.
 - One (1) 12" x 2" M x 2" F winch mounting adapter(s) shall be provided. Winch adapter will extend the specified portable winch 6" from receiver. An aluminum mounting bracket shall be provided to store winch adapter(s) inside a body compartment as close to receiver location as possible.
 - The receiver(s) shall have one (1) rubber cover(s) provided.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

REAR BUMPER

- The specified rear trailer hitch shall be compatible with the removable rope anchor point and/or a portable electric winch (when specified).
 - There shall be one (1) 12 VDC plug(s) with quick connect provided to power a Ramsey portable winch. All 12 VDC cables to be sized according to Ramsey and installation for intended use.
 - The receiver(s) shall have one (1) rubber cover(s) provided.

LOWER SIDE BODY PROTECTION - RUB RAIL

OnScene Solutions rub rails shall be provided below the compartment door openings on both the streetside and curbside.

The rub rail shall be fabricated from 6063 extruded aluminum, measuring approximately 2-3/4" high x 1-3/8" thick with tapered aluminum end caps. The rub rail shall be bolted to the body using stainless steel bolts and 1-1/2" diameter x 5/8" thick rubber mount isolators to prevent damage to the body.

The rails shall incorporate LED clearance marker lighting recessed into the rail fascia to avoid damage to the light in case of impact. The rub rail shall have an accessory mounting track integrated into the backside of the rail to allow mounting of accessories such as ground lighting.

FOLDING STEP(S)

There shall be two (2) Innovative Controls polished cast aluminum folding step(s) provided and installed to access rear roof compartment. Each step shall be heavy duty with stainless steel spring and textured step surface meeting NFPA standards. Each step shall include an LED light.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

WALK-IN INTERIOR FINISH DETAILS

DESK, CABINET, CONSOLE FINISH

All specified interior desks, cabinets, overhead cabinets, or consoles shall be fabricated from formed 1/8" 3003 H14 alloy smooth aluminum. After fabrication is completed they shall be painted with a hammer tone powder coat paint finish for a hard durable surface. Paint color shall be gray.

The use of wood materials or laminated surfaces in the construction of desks, cabinets, overhead cabinets, or consoles will not be allowed. There will be **No Exceptions** allowed on specified ruggedized finish.

CAB/BODY WALK-THROUGH CONNECTION

The front center of the rescue body shall be interconnected with the rear crew area of custom cab through a weather tight walk-through opening. The opening shall be designed to allow the custom cab to tilt forward without disconnecting an attached type seal between the cab and body. The opening shall be approximately 24" wide x 70" high (sized to match the cutout in the rear wall of the cab).

The front of the body shall be cut out to match the cab opening. Additional reinforcements with metal angle or tubing shall be provided to back of cab or front of body, if necessary so that the walk-through opening weakens neither the cab nor body integrity.

The connection shall be weather resistant, yet provide the cab and body to move independent of each other. A flexible 3" rubber weather strip shall be attached to a stainless steel sheet metal frame around the perimeter of the opening in the back wall of the cab. A drip rail shall be provided on front of body above the opening to channel water to both sides of opening. Stainless steel scuff panels shall be provided on back of cab where the rubber seal on body comes in contact with cab.

A formed metal frame shall be bolted to the front of the body. The body-mounted frame shall be provided where the rubber seal comes into contact with the body. The framework shall be painted to match the body color.

The base of the opening shall be covered with a 3/16" aluminum tread plate full width panel, which will overlap from the cab to body so that the rubber seal can not be damaged.

Full width padded foam cushion head bumpers shall be provided on both sides of opening. Head bumpers shall be covered with matching interior vinyl and bolted to each side of walk-through.

CUT OUT IN REAR CAB WALL

The rear wall of the custom cab shall be cut out 24" wide for walk-thru application. The height of the cutout shall be determined by the cab structure in the rear wall and the roof. The opening shall be completed by the custom cab/chassis manufacturer to assure proper cab structural integrity and completed final interior finish.

SLIDING POCKET DOOR

There shall be one (1) sliding pocket door(s) provided on interior of walk-in body area. Pocket door shall be fabricated from 1/8" smooth aluminum and be approximately 1-1/2" thick and hang on adjustable pocket door hardware. The door shall be painted to match the interior wall color. A stainless steel handle shall be provided on each side of door. The door shall be equipped with a pneumatic cylinder which will "over-center" to hold the door in open and closed positions.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

INTERIOR SPECIFICATIONS

INTERIOR INSULATION

Following the sheet metal fabrication the roof area, upper exterior walls and the entry door of the apparatus body shall be insulated with Dow Thermax, or equal 1-1/2" glass-fiber reinforced polyisocyanurate foam core laminated between 1.0 mil smooth, reflective aluminum foil facers on both sides, with an R9.8 value. The reinforcement, along with chemical modifications, contributes to fire resistance and dimensional stability. This insulation shall be the type that will not absorb moisture, move once in place or deteriorate. Mat type fiberglass or spray in foam insulation is not acceptable.

INTERIOR FINISH

The interior of the apparatus body shall have a fully maintenance free and durable finish. The interior finish shall be installed on the ceiling, front wall, and interior side walls from top of exterior compartments to ceiling height.

The interior panels shall be installed with sheet metal screws with gray plastic plugs covering the screws. The seams between FRP panels, interior corners, and exterior corners shall be trimmed with gray plastic molding.

The interior finish shall be pearl gray pebble grain FRP.

INTERIOR WALKWAY SIDE WALLS

Walkway side walls from floor level to top of exterior compartments shall be aluminum tread plate panels.

INTERIOR WALKWAY FLOOR

The NFPA compliant 3/16" aluminum tread plate walkway floor shall be installed above the barrier, with a 2" high vertical break on each side of the floor panel to form a watertight splash and kickboard along the walkway sides.

The walkway floor area continuously welded at all cross seams to provide a watertight finish, so that a water hose may be used to flush-out walkway area.

INTERIOR SUB-FLOOR

Above the body subframe shall be an isolation sheet that shall prevent outside elements from permeating the full length sound and thermal barrier of 3/4" thick air core plastic. The sheet shall be fabricated from the same type of material as is used in the subframe. The isolation sheet shall be flanged on both sides with a 1" high vertical break.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

STREETSIDE INTERIOR AREA (IS1)

- The 12 volt electrical distribution panel shall be located back of compartment.
- There shall be one (1) cabinet(s) provided on interior above the interior deck surface formed by exterior compartment ceilings. Cabinet(s) shall be framed in from the top of the interior deck surface to the ceiling of the walk-in area. Each cabinet shall be approximately 40" wide x 16" high x 28" deep.
- There shall be two (2) cargo nets using 2" nylon webbing provided, one (1) over cabinet opening, and one (1) over the lower walkway wall to cover access to exterior cabinets S1 with easy release automotive style latches at top and/or sides.

CURBSIDE INTERIOR AREA (IC1)

- There shall be one (1) cabinet(s) provided on interior above the interior deck surface formed by exterior compartment ceilings. Cabinet(s) shall be framed in from the top of the interior deck surface to the ceiling of the walk-in area. Each cabinet shall be approximately 40" wide x 16" high x 28" deep.
- Cabinet shall be provided with vertically mounted shallow aluminum Shelf-Trac for specified component installation.
- There shall be two (2) cargo nets using 2" nylon webbing provided, one (1) over cabinet opening, and one (1) over the lower walkway wall to cover access to exterior cabinets S1 with easy release automotive style latches at top and/or sides.
- There shall be one (1) vertically adjustable shelf in each of the above cabinets. It shall have a 1.25" lip to contain items while minimizing space used.

REAR INTERIOR AREA (IR1)

- There shall be one (1) cabinet(s) provided on interior in the upper transverse compartment S1/C1 and below the upper roof compartment. Cabinet shall be approximately 40" W x 12" H x 18" D..
- Cargo netting of 2" nylon webbing shall be provided over cabinet opening with easy release dowel style securement at top.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

LOW VOLTAGE ELECTRICAL SYSTEM- 12 VDC

General

Any low voltage electrical systems or warning devices installed on the fire apparatus shall be appropriate for the mounting location and intended electrical load.

Where wire passes through sheet metal, grommets shall be used to protect wire and wire looms. Electrical connections shall be with double crimp water-tight heat shrink connectors.

All 12 VDC wiring running from front to back of vehicle body shall be run in full length electrical wiring raceway down each side of body.

Wiring

All electrical circuit feeder wiring supplied and installed by the fire apparatus manufacturer shall meet the requirements of NFPA Chapter 13.

The circuit feeder wire shall be stranded copper or copper alloy conductors of a gauge rated to carry 125% of the maximum current for which the circuit is protected. Voltage drops in all wiring from the power source to the using device shall not exceed 10%. The use of star washers for circuit ground connections shall not be permitted.

All circuits shall otherwise be wired in conformance with SAE J1292, *Automobile, Truck, Truck-Tractor, Trailer, and Motor Coach Wiring*.

Wiring and Wire Harness Construction

All insulated wire and cable shall conform to SAE J1127, *Low Voltage Battery Cable*, or SAE J1128, *Low Voltage Primary Cable*, type SXL, GXL, or TXL.

All conductors shall be constructed in accordance with SAE J1127 or SAE J1128, except where good engineering practice dictates special strand construction. Conductor materials and stranding, other than copper, shall be permitted if all applicable requirements for physical, electrical, and environmental conditions are met as dictated by the end application. Physical and dimensional values of conductor insulation shall be in conformance with the requirements of SAE J1127 or SAE J1128, except where good engineering practice dictates special conductor insulation. The overall covering of conductors shall be moisture-resistant loom or braid that has a minimum continuous rating of 194°F (90°C) except where good engineering practice dictates special consideration for loom installations exposed to higher temperatures. The overall covering of jacketed cables shall be moisture resistant and have a minimum continuous temperature rating of 194°F (90°C), except where good engineering practice dictates special consideration for cable installations exposed to higher temperatures.

All wiring connections and terminations shall use a method that provides a positive mechanical and electrical connection. The wiring connections and terminations shall be installed in accordance with the device manufacturer's instructions. All ungrounded electrical terminals shall have protective covers or be in enclosures. Wire nut, insulation displacement, and insulation piercing connections shall not be used.

Wiring shall be restrained to prevent damage caused by chafing or ice buildup and protected against heat, liquid contaminants, or other environmental factors.

Wiring shall be uniquely identified at least every 2 ft (0.6 m) by color coding or permanent marking with a circuit function code. The identification shall reference a wiring diagram.

Circuits shall be provided with properly rated low voltage over-current protective devices. Such devices shall be readily accessible and protected against heat in excess of the over-current device's design range, mechanical damage, and water spray. Circuit protection shall be accomplished by utilizing fuses, circuit breakers, fusible links, or solid state equivalent devices.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

If a mechanical-type device is used, it shall conform to one of the following SAE standards:

- 1) SAE J156, *Fusible Links*
- 2) SAE J553, *Circuit Breakers*
- 3) SAE J554, *Electric Fuses (Cartridge Type)*
- 4) SAE J1888, *High Current Time Lag Electric Fuses*
- 5) SAE J2077, *Miniature Blade Type Electrical Fuses*

Switches, relays, terminals, and connectors shall have a direct current (dc) rating of 125% of maximum current for which the circuit is protected.

Power Supply

A 12 V or greater electrical alternator shall be provided. The alternator shall have a minimum output at idle to meet the minimum continuous electrical load of the vehicle, at 200°F (93°C) ambient temperature within the engine compartment, and shall be provided with full automatic regulation.

Minimum Continuous Electrical Load

The minimum continuous electrical load shall consist of the total amperage required to simultaneously operate the following in a stationary mode during emergency operations:

- 1) The propulsion engine and transmission
- 2) All legally required clearance and marker lights, headlights, and other electrical devices except windshield wipers and four-way hazard flashers
- 3) The radio(s) at a duty cycle of 10 percent transmit and 90% receive (for calculation and testing purposes, a default value of 5 A continuous)
- 4) The lighting necessary to produce 2 fc (20 lx) of illumination on all walking surfaces on the apparatus and on the ground at all egress points onto and off the apparatus, 5 fc (50 lx) of illumination on all control and instrument panels, and 50 percent of the total compartment lighting loads
- 5) The minimum optical warning system, where the apparatus is blocking the right-of way
- 6) The continuous electrical current required to simultaneously operate any fire pumps, aerial devices, and hydraulic pumps
- 7) Other warning devices and electrical loads defined by the purchaser as critical to the mission of the apparatus

If the apparatus is equipped to tow a trailer, an additional 45 A shall be added to the minimum continuous electrical load to provide electrical power for the federally required clearance and marker lighting and the optical warning devices mounted on the trailer.

The condition of the low voltage electrical system shall be monitored by a warning system that provides both an audible and a visual signal to persons on, in, or near the apparatus of an impending electrical system failure caused by the excessive discharge of the battery set.

The charge status of the battery shall be determined either by direct measurement of the battery charge or indirectly by monitoring the electrical system voltage.

If electrical system voltage is monitored, the alarm shall sound if the system voltage at the battery or at the master load disconnect switch drops below 11.8 V for 12 V nominal systems, 23.6 V for 24 V nominal systems, or 35.4 V for 42 V nominal systems for more than 120 seconds.

A voltmeter shall be mounted on the driver's instrument panel to allow direct observation of the system voltage.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

Electromagnetic Interference

Electromagnetic interference suppression shall be provided, as required, to satisfy the radiation limits specified in SAE J551/1, *Performance Levels and Methods of Measurement of Electromagnetic Compatibility of Vehicles, Boats (up to 15 m), and Machines (16.6 Hz to 18 GHz)*.

Wiring Diagram

A complete electrical wiring schematic of actual system shall be provided with finished apparatus. Similar or generic type electrical schematics shall NOT BE ACCEPTABLE.

Low Voltage Electrical System Performance Test

A low voltage electrical system test certification shall be provided with delivered apparatus.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

12 VOLT MULTIPLEX CONTROL CENTER

The apparatus shall be equipped with a Weldon V-MUX multiplexed 12 volt electrical system that will provide complete diagnostic capability, No Exception. The system shall have the capability of delivering multiple signals via a CAN bus, utilizing specifications set forth by SAE J1939. The system shall be node based to maximize stability so that failure of one node does not affect the operation of the other nodes. The system shall use shielded twisted-pair wire for transmission of system function signals. The shielded wire shall provide protection against EMI and RFI noise interruptions.

The multiplex system shall be responsible for providing power management functions as well as load shedding. The warning light system shall be controlled by the multiplex system. The system shall be capable of displaying text and/or graphic messages on a display module. The system shall be based on solid-state technology and shall include self-contained diagnostic indicators.

WELDON CERTIFICATION

A letter shall be provided with bid submittal that the Contractor has successfully completed the Weldon training requirements for Level 1 of the V-MUX Certified Supplier Program and is authorized to design, build, and service V-MUX electrical systems.

MULTIPLEX SYSTEM INTERFACE DISPLAY

The Weldon V-MUX Vista IV multiplex system interface display(s) shall be provided by the cab/chassis manufacturer. The full-color Vista interface display allows the user to control warning and scene lighting, HVAC controls (when specified), and view on-board diagnostics including service information. This display has a wide operating temperature range, automatic screen switching in response to current conditions, and a sleep mode option to eliminate night glare. The following features shall be included;

- 800 x 480 resolution
- Four video ports
- Flash updates with USB memory stick
- Display inside and outside temperature (when specified)
- Automatic climate control (when specified)
- 100% Configurable (OEM Level)
- Field re-programmable
- Peer to peer network
- On-board diagnostics / service information
- Colors change to indicate button status
- Video Ready for: Backup camera, Thermal camera, DVD, GPS...

MULTIPLEX DOWNLOADER AND DIAGNOSTIC KIT

Provided with the completed apparatus shall be one (1) multiplex downloader and diagnostic kit. The diagnostic software and all necessary connections will allow the operator to easily troubleshoot components of the multiplex system. The downloader portion will allow the operator to download changes from Weldon or the OEM's electrical department as necessary for troubleshooting and repairs. The kit shall be contained in a small waterproof carry case.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

BATTERY SYSTEM

The battery connectors shall be heavy duty type with cables terminating in heat shrink loom. Heavy duty battery cables shall provide maximum power to the electrical system. Where required, the cables shall be shielded from exhaust tubing and the muffler. Large rubber grommets shall be provided where cables enter the battery compartment.

Batteries shall be of the high-cycle type. With the engine off, the battery system shall be able to provide the minimum continuous electrical load for 10 minutes without discharging more than 50 percent of the reserve capacity and then to restart the engine. The battery system cold cranking amps (CCA) rating shall meet or exceed the minimum CCA recommendations of the engine manufacturer. The batteries shall be mounted to prevent movement during fire apparatus operation and shall be protected against accumulations of road spray, snow, and road debris. The batteries shall be readily accessible for examination, testing, and maintenance.

A means shall be provided for jump-starting the engine if the batteries are not accessible without lifting the cab of a tilt-cab apparatus.

Where an enclosed battery compartment is provided, it shall be ventilated to the exterior to prevent the buildup of heat and explosive fumes. The batteries shall be protected against vibration and temperatures that exceed the battery manufacturer's recommendation.

An onboard battery conditioner or charger or a polarized inlet shall be provided for charging all batteries. Where an onboard conditioner or charger is supplied, the associated line voltage electrical power system shall be installed in accordance with Chapter 22.

One of the following master disconnect switches shall be provided:

- 1) A master body disconnect switch that disconnects all electrical loads not provided by the chassis manufacturer
- 2) A master load disconnect switch that disconnects all electrical loads on the apparatus except the starter

Electronic control systems and similar devices shall be permitted to be otherwise connected if so specified by their manufacturer.

The alternator shall be wired directly to the batteries through the ammeter shunt(s), if one is provided, and not through the master load disconnect switch.

A green "battery disconnect on" indicator light that is visible from the driver's position shall be provided.

Rechargeable hand lights, radios, and other similar devices shall be permitted to be connected to the electrical system ahead of the master disconnect switch.

A sequential switching device shall be permitted to energize the optical warning devices and other high current devices required in minimum continuous electrical load, provided the switching device shall first energize the electrical devices required in minimum continuous electrical load within 5 seconds.

BATTERY SWITCH

One (1) "battery disconnect on" switch in cab located within easy reach of Driver with green indicator light that is visible from the driver's position shall be provided. The switch and indicator light shall be supplied and installed by the cab/chassis manufacturer.

BATTERY SOLENOID

Battery switch shall consist of a minimum 200 ampere, constant duty solenoid to feed from positive side of battery.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

SHORELINE SWITCHING

All battery charging shall be done by Outback charger/inverter. The battery charger shall be wired to the cab/chassis 120 VAC shoreline to activate automatically when power is connected.

A weatherproof two-position toggle type switch shall be installed above the shoreline receptacle. The switch shall be wired to operate the “on board” battery chargers/inverter and auxiliary air brake compressor in position one, and to run battery charger/inverter only in position two. Proper switching labeling shall be included.

- Top switch position – Battery charger and air compressor
- Bottom switch position – Battery charger/inverter

SHORE POWER INLET

The shore power inlet for battery conditioner shall be supplied and installed by the cab chassis manufacturer.

ENGINE COMPARTMENT LIGHT

Engine compartment light(s) shall be supplied and installed by the cab chassis manufacturer.

REAR BODY SWITCHING

1. There shall be a switch on streetside rear of body to activate the rear scene lights and any specified rear step lighting. The scene lights shall automatically shut-off when the parking brake is disengaged.
2. There shall be a switch on streetside rear of body to activate the air bag "Kneel" feature provided with specified cab and chassis. The rear air bags shall automatically inflate when the parking brake is disengaged.

The switch(es) shall be momentary style and connected to a bi-stable relay, allowing multiple switching locations.

CAB SPOTLIGHT

There shall be one (1) GoLight LED 20204 motorized, white, 12 VDC, 3 Amp, spotlight(s) that operates via a wired dash mount controller with joystick and on/off button located on officers dash panel. The joystick controls the motorized 135 degree tilt of the spotlight and the motorized rotation of the light a full 370 degrees. The light continues to move while the joystick is pressed. Once any button is released, the spotlight remains locked in that position until the joystick is moved again. The dash controller also turns the light on and off, so no additional switches are required. The dash mounted remote control allows for fingertip operation and is hard wired to the searchlight.

The GoLight is mounted to the surface of vehicle using (4) stainless steel screws and a rubber gasket for a quick, safe and secure attachment. Light shall have a 3 year limited warranty.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

CAB HAZARD WARNING LIGHT

A red flashing or rotating light, located in the driving compartment. The light shall be furnished by the cab/chassis manufacturer. The light shall be illuminated automatically whenever the vehicles parking brake is not fully engaged and any of the following conditions exist:

- Any passenger or equipment compartment door is not closed.
- Any ladder or equipment rack is not in the stowed position.
- Stabilizer system is not in its stowed position.
- Powered light tower is not stowed.
- Any other device permanently attached to the apparatus is open, extended, or deployed in a manner that is likely to cause damage to the apparatus if the apparatus is moved.

Compartments and equipment meeting all of the following conditions shall be permitted to be exempt from being wired to the hazard light:

- The volume is less than or equal to 4 ft³ (0.1 m³).
- The compartment has an opening less than or equal to 144 in.² (92,900 mm²).
- The open door does not extend sideways beyond the mirrors or up above the top of the fire apparatus.
- All equipment in the compartment is restrained so that nothing can fall out if the door is open while the apparatus is moving.
- Manually raised pole lights with an extension of less than 5 ft (1.5 m).

The hazard light shall be labeled "DO NOT MOVE APPARATUS WHEN FLASHING".

BACK-UP ALARM

An electronic back-up alarm shall be supplied and installed by the cab/chassis manufacturer. The back-up alarm shall actuate automatically when the transmission gear selector is placed in reverse.

REAR VIEW CAMERA

The cab chassis provided rear view camera shall be installed on the rear of the body.

INTERIOR LED LIGHTS

Three (3) OnScene Solution model #70154, 10" x 10" x 7/8", 10-30 VDC, surface white LED light(s) with clear lens shall be provided back of cab and front walk-in area of body. The lights shall be switched with high/low intensity setting at the entry door(s). In addition light(s) will be capable of a five (5) second delay after switching off.

TAIL LIGHTS

Rear body tail lights shall be vertically mounted and located per Federal Motor Vehicle Safety Standards, FMVSS and Canadian Motor Vehicle Safety Standards CMVSS. The following lights shall be provided;

- Two (2) Whelen C6T amber LED sequential arrow turn signal lights, amber lens
- Two (2) Whelen C6BTT red LED brake and tail lights, red lens
- Two (2) Whelen C6LCC white LED back-up lights, clear lens

Each of the lights above shall be mounted in a C6FC, chrome finish bezels.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

MIDSHIP MARKER/TURN SIGNAL

Two (2) Whelen model T0A00MAR 2" round amber LED midship body clearance marker/turn signal lights shall be provided and installed, one (1) light on each side of the body, in forward wheel well of rear axle. Midship marker/turn lights shall be wired to the headlight circuit of the chassis.

MARKER LIGHTS

The body shall be equipped with all necessary side and rear clearance lights and reflectors in accordance with Federal Motor Vehicle Safety Standards (FMVSS) and Canadian Motor Vehicle Safety Standards (CMVSS). Clearance lights shall be Truck-Lite model 18 series, 3 diode LED, reflectorized type to reduce the need for maintenance and lower the amp draw. Clearance lights on body shall be connected to the clearance light circuit of the chassis.

CAB STEP LIGHTS / GROUND LIGHTS

The step lights and/or ground lights shall be supplied and installed by the cab/chassis manufacturer. Light(s) shall be capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting designed to provide illumination on areas under the driver and crew riding area exits shall be switchable but activated automatically when the exit doors are opened.

LICENSE PLATE MOUNTING BRACKET

A license plate mounting bracket shall not be provided on completed unit.

ELECTRONIC SIREN

One (1) Whelen model 295SLSA1 electronic siren control with selectable 100 or 200 watt output, hands-free operation, user selectable siren tones, park kill, and standard hard wired microphone shall be provided and installed in officer side upper center dash. Siren power shall be wired through the master warning light switch.

Siren shall be able to be operated by a foot switch at the Drivers' position and a foot switch located at the Officers position on cab floor.

Foot switches, and the cab/chassis supplied foot switches shall all be mounted on a 30 degree wedge on cab floor.

SIREN SPEAKER

The siren speaker(s) shall be supplied and installed by the cab/chassis manufacturer, if required by Honolulu Fire Department.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

SIDE LED SCENE LIGHTS

There shall be four (4) Whelen 900 Series Super-LED® model C9SL, 9" x 7" surface mounted scene light(s) provided on the upper body. Light quantity shall be divided equally per side. The 900 configuration shall consist of 36 white Super-LEDs and a clear non optic polycarbonate lens with metalized SurfaceMax reflector with integrated optic collimators for maximum output. The 900 series light shall have 6,500 useable lumens each. Each light shall have a chrome flange. The scene light is covered by a five year factory warranty.

Two (2) switches shall be provided, one (1) for the streetside scene lights, and one (1) for the curbside scene lights.

The lights shall be controlled at the multiplex display(s) in the cab.

REAR LED SCENE LIGHTS

Two (2) Whelen 900 Series Super-LED® model C9SL, 9" x 7" surface mounted scene lights shall be provided on the upper rear body to light the work area immediately behind the vehicle. The 900 configuration shall consist of 36 white Super-LEDs and a clear non optic polycarbonate lens with metalized SurfaceMax reflector with integrated optic collimators for maximum output. The 900 series light shall have 6,500 useable lumens each. Each light shall have a chrome flange. The scene light is covered by a five year factory warranty.

The above scene lights shall light to a level of at least 3 fc (30 lx), measured at 25 equally spaced points on a 2.5 ft (750 mm) grid within a 10 ft x 10 ft (3 m x 3m) square to the rear of vehicle.

The lights shall be controlled at the multiplex display(s) in the cab.

The rear scene lights shall also be activated when the apparatus is in reverse.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

SIGTRONICS INTERCOM SYSTEM

A Sigtronics US-67S intercom system or approved substitute shall be provided. The mobile 2-way radio shall be interfaced with the intercom via a radio interface cable **provided by the HFD Radio Shop**. Wiring diagram shall also be provided by contacting Russell Kaneakua of the HFD Radio Shop. Proper wiring provides two-way radio monitoring by all positions and push-to-talk radio transmit functions from the driver and officer. The intercom shall not be interfaced to the broadcast radio and/or Compact Disc player.

The system shall include:

- One (1) each, intercom, US-67S. Intercom serial number shall be recorded and included with as-built and warranty documentation.
- Seven (7) each, headset jacks, enclosed in blue mounting boxes. There shall be one (1) each, headset jack for the driver, officer, four (4) crew members, and one (1) on front wall of front walk-in area. Wires to each headset jack to include a minimum 4" service length to facilitate service.
- Four (4) each, wired headsets, SE-8.
- Two (2) each, wireless headsets with charge stations, SWS-6
- Each headset within the cab and the command cab shall be hung from the ceiling by a headset hook. Six (6) headset hooks with necessary hardware. Hagar or approved substitute.
- Two (2) each, push-to-talk buttons, enclosed in blue mounting boxes. There shall be one (1) each, button, for the driver and officer.
- The wireless headsets and chargers units shall be provided, one (1) for the driver, and one (1) for officer position. and interfaced with the above Sigtronics intercom system. The intercom unit connect to the Harris XG-75M 800 MHz trunking mobile radio. Wireless devices must also interface with Bluetooth-enabled cell phones. Wireless headset shall be charged by the cable included in the kit connected to the battery saver circuit and routed to where the headsets will be stored in the cab. (Recommend they be stored on a hook in a position not blocking driver's view or impeding access to other equipment in the cab.)

The Contractor shall be responsible for all necessary cabling for a working system.

INTERCOM SYSTEM INSTALLATION

The above listed intercom system shall be installed in the cab locations as follows;

Front of Cab

- Driver's – Mounted above the right shoulder position on ceiling.
- Officer's – Mounted above the left shoulder position on ceiling.

Rear Crew Area

- Driver's side rear facing – Above the right shoulder on the wall or ceiling.
- Driver's side rear facing center – Above the left shoulder on the ceiling.
- Officer's side rear facing – Above the left shoulder on the wall or ceiling.
- Officer's side rear facing center – Above the right shoulder on the ceiling.
- Driver's side forward facing – Above the right shoulder on the rear wall or ceiling.
- Driver's side forward facing center – Above the left shoulder on the rear wall or ceiling.
- Officer's side forward facing – Above the left shoulder on the rear wall or ceiling.
- Officer's side forward facing center – Above the right shoulder on the rear wall or ceiling.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

WARNING LIGHT PACKAGE

Each apparatus shall have a system of optical warning devices that meets or exceeds the requirements of this section.

The optical warning system shall consist of an upper and a lower warning level. The requirements for each level shall be met by the warning devices in that particular level without consideration of the warning devices in the other level.

For the purposes of defining and measuring the required optical performance, the upper and lower warning levels shall be divided into four (4) warning zones. The four zones shall be determined by lines drawn through the geometric center of the apparatus at 45 degrees to a line drawn lengthwise through the geometric center of the apparatus. The four (4) zones shall be designated A, B, C, and D in a clockwise direction, with zone A to the front of the apparatus.

Each optical warning device shall be installed on the apparatus and connected to the apparatus's electrical system in accordance with the requirements of this standard and the requirements of the manufacturer of the device.

A master optical warning system switch that energizes all the optical warning devices shall be provided.

The optical warning system on the fire apparatus shall be capable of two (2) separate signaling modes during emergency operations. One (1) mode shall signal to drivers and pedestrians that the apparatus is responding to an emergency and is calling for the right-of-way. One (1) mode shall signal that the apparatus is stopped and is blocking the right-of-way. The use of some or all of the same warning lights shall be permitted for both modes provided the other requirements of this chapter are met.

A switching system shall be provided that senses the position of the parking brake or the park position of an automatic transmission. When the master optical warning system switch is closed and the parking brake is released or the automatic transmission is not in park, the warning devices signaling the call for the right-of-way shall be energized. When the master optical warning system switch is closed and the parking brake is on or the automatic transmission is in park, the warning devices signaling the blockage of the right-of-way shall be energized. The system shall be permitted to have a method of modifying the two (2) signaling modes.

The optical warning devices shall be constructed or arranged so as to avoid the projection of light, either directly or through mirrors, into any driving or crew compartment(s). The front optical warning devices shall be placed so as to maintain the maximum possible separation from the headlights.

Steadily burning, non flashing optical sources shall be permitted to be used.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

UPPER LEVEL OPTICAL WARNING DEVICES

The upper-level optical warning devices shall be mounted as high and as close to the corner points of the apparatus as is practical to define the clearance lines of the apparatus. The upper-level optical warning devices shall not be mounted above the maximum height, specified by the device manufacturer.

ZONE A - FRONT WARNING LIGHTS

There shall be one (1) Whelen Freedom F4N8VLED LED 82" lightbar permanently mounted to the cab roof.

The lightbar configuration (streetside to curbside) shall be:

<u>SECTION</u>	<u>INTERNAL COMPONENTS</u>	<u>LENS COLOR</u>
1	Red Rear Corner LED	Clear
2	Red Front Corner LED	Clear
3	Red Super Long-LED	Clear
4	Red Super Long-LED	Clear
5	Red Super Long-LED	Clear
6	Blank	Clear
7	White Super Long-LED	Clear
8	White Super Long-LED (Opticom)	Clear
9	White Super Long-LED (Opticom)	Clear
10	White Super Long-LED	Clear
11	Blank	Clear
12	Red Super Long-LED	Clear
13	Red Super Long-LED	Clear
14	Red Super Long-LED	Clear
15	Red Front Corner LED	Clear
16	Red Rear Corner LED	Clear

All clear lights shall shut down when the parking brake is set to comply with "Blocking" mode requirements as outlined in NFPA 1901.

The lightbar(s) shall be separately controlled at multiplex display in the cab as follows;

Four (4) virtual switches shall control the lightbar.

- One (1) for all the warning lights.
- One (1) Opticom Model 793B switch for the traffic light controller.
- One (1) for the streetside alley light
- One (1) for the curbside alley light

The lightbar shall be supplied with LR11 super LED alley lights on each end. Lights shall be wired to specified scene light switches. Addition of alley lights may change standard light bar configuration specified.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

GTT OPTICOM

A GTT Opticom model 795H Infrared LED emitter light with built-in power supply shall be provided inside the specified light bar. Adding the Opticom LED may re-configure the standard light(s) in specified light bar. The LED technology uses less power, has a longer life, and non-visible to the human eye.

The Opticom emitter light shall be activated with light bar and de-activated when the park brake is set and the vehicle is in blocking mode.

ZONES B AND D - SIDE WARNING LIGHTS

UPPER REAR CORNER WARNING LIGHTS

There shall be two (2) Whelen C9 SurfaceMax series (9" x 7") red Linear Super-LED with full-fill optic lights provided, one (1) each side. The self-contained flashing light shall have 75 Scan-Lock™ flash patterns including steady burn with hi/low power and covered by a five year factory warranty. Each light shall have a clear lens and chrome flange.

The lights shall be controlled at the multiplex display(s) in the cab.

UPPER FORWARD CORNER WARNING LIGHTS

There shall be two (2) Whelen C9 SurfaceMax series (9" x 7") red Linear Super-LED with full-fill optic lights provided, one (1) each side. The self-contained flashing light shall have 75 Scan-Lock™ flash patterns including steady burn with hi/low power and covered by a five year factory warranty. Each light shall have a clear lens and chrome flange.

The lights shall be controlled at the multiplex display(s) in the cab.

ZONE C - REAR WARNING LIGHTS

There shall be two (2) Whelen C9 SurfaceMax series (9" x 7") red Linear Super-LED with full-fill optic lights provided, one (1) each side. The self-contained flashing light shall have 75 Scan-Lock™ flash patterns including steady burn with hi/low power and covered by a five year factory warranty. Each light shall have a clear lens and chrome flange.

The lights shall be controlled at the multiplex display(s) in the cab.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

LOWER LEVEL OPTICAL WARNING DEVICES

To define the clearance lines of the apparatus, the optical center of the lower-level optical warning devices in the front of the vehicle shall be mounted on or forward of the front axle centerline and as close to the front corner points of the apparatus as is practical.

The optical center of the lower-level optical warning devices at the rear of the vehicle shall be mounted on or behind the rear axle centerline and as close to the rear corners of the apparatus as is practical. The optical center of any lower-level device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground for large apparatus, and 18 in. and 48 in. (460 mm and 1600 mm) above level ground.

A midship optical warning device shall be mounted right and the left sides of the apparatus if the distance between the front and rear lower-level optical devices exceeds 25 ft (7.6 m) at the optical center. Additional midship optical warning devices shall be required, where necessary, to maintain a horizontal distance between the centers of adjacent lower-level optical warning devices of 25 ft (7.6 m) or less. The optical center of any midship mounted optical warning device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground.

ZONE A - FRONT WARNING LIGHTS

The warning lights shall be supplied and installed by the cab/chassis manufacturer. They shall be Whelen lights to complete an NFPA compliant lower level warning light system.

The lights shall be controlled at the multiplex display(s) in the cab.

ZONES B AND D - CAB INTERSECTOR LIGHT (CAB FRONT CORNERS)

The warning lights shall be supplied and installed by the cab/chassis manufacturer. They shall be Whelen lights to complete an NFPA compliant lower level warning light system.

The lights shall be controlled at the multiplex display(s) in the cab.

ZONES B AND D - BODY LIGHT (BODY WHEELWELL AREA)

There shall be two (2) Whelen ION Wide Series (6" x 1 3/4") red Super-LED surface mount lights (WIONSMCR) provided, one (1) on each side. The wide angle warning light shall incorporate six red Super-LEDs. The self-contained flashing light shall have 75 Scan-Lock™ flash patterns including steady burn with hi/low power and covered by a five year factory warranty. Each light shall have a clear lens and chrome flange.

The lights shall be controlled at the multiplex display(s) in the cab.

ZONES B AND D - BODY INTERSECTOR LIGHT (BODY REAR CORNERS)

There shall be two (2) Whelen C6 SurfaceMax series (6" x 4") red Linear Super-LED with full-fill optic lights provided, one (1) each side. The self-contained flashing light shall have 75 Scan-Lock™ flash patterns including steady burn with hi/low power and covered by a five year factory warranty. Each light shall have a clear lens and chrome flange.

The lights shall be controlled at the multiplex display(s) in the cab.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

ZONE C - REAR WARNING LIGHTS (LOWER REAR CORNERS)

There shall be two (2) Whelen C6 SurfaceMax series (6" x 4") red Linear Super-LED with full-fill optic lights provided, one (1) each side. The self-contained flashing light shall have 75 Scan-Lock™ flash patterns including steady burn with hi/low power and covered by a five year factory warranty. Each light shall have a clear lens and chrome flange.

The lights shall be controlled at the multiplex display(s) in the cab.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

LINE VOLTAGE ELECTRICAL SYSTEM

CHARGER / INVERTER

One (1) Outback model VFX2812M inverter shall be provided and mounted tight to wall on streetside cab floor area under desk. A vertical kick panel shall be provided to protect charger/inverter unit. Unit will be connected to the starting batteries on cab/chassis. The Outback inverter is an advanced true sine wave power inverter perfect for operating equipment requiring up to 2800 watts. Unit shall have following features;

- 2800 watt Continuous / 4800 watt Surge
- 56 amp AC peak
- True sine wave output
- Intelligent battery charging
- High operating efficiency
- Corrosion-resistant internal components
- Integrated network communications
- Standard 5-year warranty
- 13" x 8.25" x 16.25", weight 61 lbs.

A weatherproof two-position toggle type switch shall be installed above the shoreline receptacle. The switch shall be wired to operate the "on board" battery chargers/inverter and auxiliary air brake compressor in position one, and to run battery charger/inverter only in position two. Proper switching labeling shall be included.

- Top switch position – Battery charger and air compressor
- Bottom switch position – Battery charger/inverter

SHORE POWER INLET - INVERTER

A transfer switch shall be required to isolate one power source from the other where a circuit(s) is intended to be supplied from more than one power source. To protect both the generator and external power source from back feed, two (2) 120 volt, 30 ampere, 4PST auxiliary contact with safety interlock relay shall be installed. Relay shall cut-off the connection between the generator supply circuit and device circuits when shore power is connected.

Transfer equipment, including transfer switches, shall operate such that all ungrounded conductors of one power source are disconnected before any ungrounded conductors of the second power source are connected. The neutral conductor shall be switched through the transfer switch. The apparatus shall have a label permanently affixed at the power inlet that indicates the line voltage, and amperage.

Shore power shall be wired to the specified 120 volt inverter.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

LINE VOLTAGE ELECTRICAL SYSTEM

GENERAL REQUIREMENTS

Stability

Any fixed line voltage power source producing alternating current (ac) shall produce electric power at 60 Hz, ± 3 Hz when producing power at all levels between no load and full rated power. Any fixed line voltage power source shall produce electric power at the rated voltage ± 10 percent when producing power at all levels between no load and full rated power.

The maximum voltage supplied to portable equipment shall not exceed 275 volts to ground. Higher voltage shall be permitted only when used to operate fixed wired, permanently mounted equipment on the apparatus.

Conformance with National Electrical Code

All components, equipment, and installation procedures shall conform to *NFPA 70, National Electrical Code*, except where superseded by the requirements of this chapter. Where the requirements of this chapter differ from those in *NFPA 70*, the requirements in this chapter shall apply.

Where available, line voltage electrical system equipment and materials included on the apparatus shall be listed and used only in the manner for which they have been listed. All equipment and materials shall be installed in accordance with the manufacturer's instructions.

Location Ratings

Any equipment used in a dry location shall be listed for dry locations. Any equipment used in a wet location shall be listed for wet locations.

Any equipment, except a PTO-driven generator, used in an underbody or under chassis location that is subject to road spray shall be either listed as Type 4 or mounted in an enclosure that is listed as Type 4.

If a PTO-driven generator is located in an underbody or under chassis location, the installation shall include a shield to prevent road spray from splashing directly on the generator.

Grounding

Grounding shall be in accordance with 250.34(A) and 250.34(B) of *NFPA 70*. Ungrounded systems shall not be used.

Only stranded or braided copper conductors shall be used for grounding and bonding.

The grounded current-carrying conductor (neutral) shall be insulated from the equipment-grounding conductors and from the equipment enclosures and other grounded parts.

The neutral conductor shall be colored white or gray in accordance with 200.6, "Means of Identifying Grounded Conductors," of *NFPA 70*.

Any bonding screws, straps, or buses in the distribution panel board or in other system components between the neutral and equipment-grounding conductor shall be removed and discarded.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

Bonding

The neutral conductor of the power source shall be bonded to the vehicle frame. The neutral bonding connection shall occur only at the power source. In addition to the bonding required for the low voltage return current, each body and each driving or crew compartment enclosure shall be bonded to the vehicle frame by a copper conductor.

The conductor shall have a minimum ampere rating, as defined in 310.15, "Ampacities for Conductors Rated 0–2000 Volts," of *NFPA 70*, of 115 percent of the rated ampere on the power source specification label.

A single conductor that is sized to meet the low voltage and line voltage requirements shall be permitted to be used.

Ground Fault Circuit Interrupters

In special service vehicles incorporating a lavatory, sink, toilet, shower, or tub, 120 V, 15 or 20 A receptacles within 6 ft (1.8 m) of these fixtures shall have ground fault circuit interrupter (GFCI) protection. GFCIs integrated into outlets or circuit breakers or as stand-alone devices shall be permitted to be used in situations.

Power Source General Requirements

All power source system mechanical and electrical components shall be sized to support the continuous duty nameplate rating of the power source.

The power source shall be shielded from contamination that would prevent the power source from operating within its design specifications.

Power Source Rating

For power sources of 8 kW or larger, the power source manufacturer shall declare the continuous duty rating that the power source can provide when installed on fire apparatus according to the manufacturer's instructions and run at 120°F (49°C) air intake temperature at 2000 ft (600 m) above sea level.

The rating on the power source specification label shall not exceed the declared rating from the power source manufacturer.

Access shall be provided to permit both routine maintenance and removal of the power source for major servicing. The power source shall be located such that neither it nor its mounting brackets interfere with the routine maintenance of the fire apparatus.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

Instrumentation

If the power source is rated at less than 3 kW, a “Power On” indicator shall be provided. If the power source is rated at 3 kW or more but less than 8 kW, a voltmeter shall be provided.

If the power source is rated at 8 kW or more, the following instrumentation shall be provided at an operator’s panel:

- 1) Voltmeter
- 2) Current meters for each ungrounded leg
- 3) Frequency (Hz) meter
- 4) Power source hour meter

The instrumentation shall be permanently mounted at an operator’s panel. The instruments shall be located in a plane facing the operator. Gauges, switches, or other instruments on this panel shall each have a label to indicate their function.

The instruments and other line voltage equipment and controls shall be protected from mechanical damage and not obstructed by tool mounting or equipment storage.

An instruction plate(s) that provides the operator with the essential power source operating instructions, including the power-up and power-down sequence, shall be permanently attached to the apparatus at any point where such operations can take place.

Operation

Provisions shall be made for placing the generator drive system in operation using controls and switches that are identified and within convenient reach of the operator.

Where the generator is driven by the chassis engine and engine compression brakes or engine exhaust brakes are furnished, they shall be automatically disengaged for generator operations.

Any control device used in the generator system power train between the engine and the generator shall be equipped with a means to prevent unintentional movement of the control device from its set position in the power generation mode.

If there is permanent wiring on the apparatus that is designed to be connected to the power source, a power source specification label that is permanently attached to the apparatus at the operator’s control station shall provide the operator with the information required.

The power source, at any load, shall not produce a noise level that exceeds 90 dBA in any driving compartment, crew compartment, or onboard command area with windows and doors closed or at any operator’s station on the apparatus.

Power Supply Assembly

The conductors used in the power supply assembly between the output terminals of the power source and the main over current protection device shall not exceed 12 ft (4 m) in length.

All power supply assembly conductors, including neutral and grounding conductors, shall have an equivalent ampere rating and shall be sized to carry not less than 115 percent of the ampere of the nameplate current rating of the power source.

If the power supply assembly connects to the vibrating part of a generator (not a connection on the base), the conductors shall be flexible cord or other fine-stranded conductors enclosed in metallic or nonmetallic liquid tight flexible conduit rated for wet locations and temperatures not less than 194°F (90°C).

Honolulu Fire Department

Production Specifications – SVI #1090-1091

Over-current Protection

Manually re-settable over current devices shall be installed to protect the line voltage electrical system components.

Power Source Protection

A main over current protection device shall be provided that is either incorporated in the power source or connected to the power source by a power supply assembly.

The size of the main over current protection device shall not exceed 100 percent of the rated amperage stated on the power source specification label or the rating of the next larger available size over current protection device, where so recommended by the power source manufacturer.

If the main over current protection device is subject to road spray, the unit shall be housed in a Type 4–rated enclosure.

Branch Circuit Over-current Protection

Over current protection devices shall be provided for each individual circuit and shall be sized at not less than 15 amps in accordance with 240.4, “Protection of Conductors,” of *NFPA 70*.

Any panel board shall have a main breaker where the panel has six or more individual branch circuits or the power source is rated 8 kW or larger.

Each over current protection device shall be marked with a label to identify the function of the circuit it protects.

Dedicated circuits shall be provided for any large appliance or device (air conditioning units, large motors, etc.) that requires 60 percent or more of the rated capacity of the circuit to which it is connected, and that circuit shall serve no other purpose.

Panelboards

All fixed power sources shall be hardwired to a permanently mounted panel board unless one of the following conditions exists:

- 1) All line voltage power connections are made through receptacles on the power source and the receptacles are protected by integrated over current devices.
- 2) Only one circuit is hardwired to the power source, which is protected by an integrated over current device.

The panel shall be visible and located so that there is unimpeded access to the panel board controls. All panel boards shall be designed for use in their intended location. The panel(s) shall be protected from mechanical damage, tool mounting, and equipment storage.

Where the power source is 120/240 V and 120 V loads are connected, the apparatus manufacturer or line voltage system installer shall consider load balancing to the extent that it is possible.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

Wiring Methods

Fixed wiring systems shall be limited to the following:

- 1) Metallic or nonmetallic liquid tight flexible conduit rated at temperatures not less than 194°F (90°C) with stranded copper wire rated for wet locations and temperatures not less than 194°F (90°C)
- 2) Type SOW, SOOW, SEOW, or SEOOW flexible cord rated at 600 V and at temperatures not less than 194°F (90°C)

Electrical cord or conduit shall not be attached to chassis suspension components, water or fuel lines, air or air brake lines, fire pump piping, hydraulic lines, exhaust system components, or low voltage wiring and shall be arranged as follows:

- 1) Separated by a minimum distance of 12 in. (300 mm) from exhaust piping or shielded from such piping
- 2) Separated from fuel lines by a minimum distance of 6 in. (150 mm)

A means shall be provided to allow “flexing” between the driving and crew compartment, the body, and other areas or equipment whose movement would stress the wiring.

Electrical cord or conduit shall be supported within 6 in. (150 mm) of any junction box and at a minimum of every 24 in. (600 mm) of run.

Supports shall be made of nonmetallic materials or of corrosion-resistant or corrosion-protected metal. All supports shall be of a design that does not cut or abrade the conduit or cord and shall be mechanically fastened to the apparatus.

Only fittings and components listed for the type of cord or conduit being installed shall be used.

Splices shall be made only in a listed junction box.

Additional Requirements for Flexible Cord Installations

Where flexible cord is used in any location where it could be damaged, it shall be protected by installation in conduit, enclosures, or guards.

Where flexible cord penetrates a metal surface, rubber or plastic grommets or bushings shall be installed.

Wiring Identification

Each line voltage circuit originating from the main panel board shall be identified.

The wire or circuit identification either shall reference a wiring diagram or wire list or shall indicate the final termination point of the circuit.

Where pre-wiring for future power sources or devices exists, the un-terminated ends shall be marked with a label showing their wire size and intended function.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

Wiring System Components

Only stranded copper conductors with an insulation rated for temperatures of at least 194°F (90°C) and wet locations shall be used. Conductors in flexible cord shall be sized in accordance with Table 400.5(A) of *NFPA 70*. Conductors used in conduit shall be sized in accordance with 310.15, “Ampacities for Conductors Rated 0–2000 Volts,” of *NFPA 70*. Aluminum or copper-clad aluminum conductors shall not be used.

All boxes shall conform to and be mounted in accordance with Article 314, “Outlet, Device, Pull, and Junction Boxes; Conduit Bodies; Fittings; and Manholes,” of *NFPA 70*. All boxes shall be accessible using ordinary hand tools. Boxes shall not be permitted behind welded or pop-riveted panels.

The maximum number of conductors permitted in any box shall be in accordance with 314.16, “Number of Conductors in Outlet, Device, and Junction Boxes, and Conduit Bodies,” of *NFPA 70*.

All wiring connections and terminations shall provide a positive mechanical and electrical connection. Connectors shall be installed in accordance with the manufacturer’s instructions. Wire nuts or insulation displacement and insulation piercing connectors shall not be used.

Each switch shall indicate the position of its contact points (i.e., open or closed) and shall be rated for the continuous operation of the load being controlled. All switches shall be marked with a label indicating the function of the switch. Circuit breakers used as switches shall be “switch rated” (SWD) or better. Switches shall simultaneously open all associated line voltage conductors. Switching of the neutral conductor alone shall not be permitted.

Line voltage circuits controlled by low voltage circuits shall be wired through properly rated relays in listed enclosures that control all non-grounded current-carrying conductors.

Receptacles and Inlet Devices

Wet and Dry Locations

All wet location receptacle outlets and inlet devices, including those on hardwired, remote power distribution boxes, shall be of the grounding type, provided with a wet location cover, and installed in accordance with Section 406.8, “Receptacles in Damp or Wet Locations,” of *NFPA 70*.

All receptacles located in a wet location shall be not less than 24 in. (600 mm) from the ground. Receptacles on off road fire apparatus shall be a minimum of 30 in. (750 mm) from the ground. All receptacles located in a dry location shall be of the grounding type and shall be at least 12 in. (300 mm) above the interior floor height. No receptacle shall be installed in a face-up position.

The face of any wet location receptacle shall be installed in a plane from vertical to not more than 45 degrees off vertical.

Receptacle Label

Each receptacle shall be marked with a label indicating the nominal line voltage (120 volts or 240 volts) and the current rating in amps of the circuit. If the receptacle is DC or other than single phase, that information shall also be marked on the label.

All receptacles and electrical inlet devices shall be listed to UL 498, *Standard for Safety Attachment Plugs and Receptacles*, or other recognized performance standards.

Receptacles used for DC voltages shall be rated for DC service.

Honolulu Fire Department

Production Specifications – SVI #1090-1091

Wiring Schematics

An "As-Built" Wiring diagrams for line voltage systems shall be provided to include the following information;

- (a) Pictorial representations of circuit logic for all electrical components and wiring
- (b) Circuit identification
- (c) Connector pin identification
- (d) Zone location of electrical components
- (e) Safety interlocks
- (f) Alternator–battery power distribution circuits
- (g) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems

Honolulu Fire Department

Production Specifications – SVI #1090-1091

EQUIPMENT PAYLOAD WEIGHT ALLOWANCE

In compliance with NFPA 1901 standards, the special service vehicle shall be designed for an equipment loading allowance of 6,000 lbs. of Honolulu Fire Department provided equipment based on a 40,001 - 50,000 pound gross vehicle weight rating.

EQUIPMENT

The following equipment shall be furnished with the completed special service vehicle;

- One (1) container of assorted stainless steel nuts, bolts, screws and washers used in the construction of the apparatus shall be provided with the completed apparatus.
- The Honolulu Fire Department supplied equipment shall be shipped to SVI for installation on unit locations per Honolulu Fire Department using PAC brackets or custom brackets as required and approved by Honolulu Fire Department.
- There shall be two (2) Zico SAC-44-E NFPA approved folding aluminum wheel chocks provided for 44" diameter tires that together will hold the vehicle when loaded to its GVWR or GCWR, on a hard surface with a 20 % grade, with the transmission in neutral, and the parking brake released.
 - The wheel chock(s) shall be mounted behind rear wheels, below body on streetside.
- One (1) 15 LB. CO2 fire extinguisher(s) shall be provided with the completed unit.
 - The above specified fire extinguisher(s) shall be installed on the completed unit, location to be determined by the Honolulu Fire Department.
- One (1) 20 lb. ABC dry chemical aluminum fire extinguisher(s) shall be provided with the completed unit.
 - The above specified fire extinguisher(s) shall be installed on the completed unit, location to be determined by the Honolulu Fire Department.
- Four (4) Streamlight Fire Vulcan C4 LED flashlight(s) with shoulder strap shall be provided with 80,000 candela and 3 hour run time. Each flashlight shall be orange in color and have a 12 volt DC charger and vehicle mount kit. Each flashlight shall have an LED spotlight style bulbs and reflectors. The flashlight(s) shall be wired to battery direct unless otherwise specified by Honolulu Fire Department.
- Four (4) flashlight(s) shall be mounted in cab on the rear area, locations per Honolulu Fire Department at mid inspection.

REMAINING NFPA MINOR EQUIPMENT BY PURCHASER

All other minor equipment not specified above, but required by NFPA 1901 for special service vehicles, section 10.9.3 shall be supplied and mounted by Honolulu Fire Department before the unit is placed in emergency service.