

Sugar Loaf Fire Protection District  
Boulder, CO  
Light Rescue- SVI#1244  
Production Specification



## **LIABILITY INSURANCE**

The manufacturer shall furnish with the bid a certificate of insurance for;

Workman's Compensation and Employer's Liability Insurance covering for all employees.

General Liability (each occurrence) of \$1,000,000.00. General Aggregate coverage of \$2,000,000.00. Products Completed / Operations Aggregate coverage of \$2,000,000.00. Medical Expense coverage of \$5,000 (any one person). Personal Injury of \$1,000,000.00.

Automobile liability of \$1,000,000.00 combined single limit (each accident), including any auto, all owned autos, scheduled autos, hired autos, non-owned autos, and garage liability.

Excess Umbrella Liability coverage of \$6,000,000.00 each occurrence, Aggregate of \$6,000,000.00. Garage Keepers Liability coverage of \$6,000,000.00 combined limit.

All insurance policies must be;

- Maintained for the life of the contract,
- Must provide ten (10) days notice before cancellation,
- Must cover all operations of the contractor, or anyone employed by them.

## **INTERNET IN-PROCESS SITE**

The manufacturer shall post and maintain a website where the Sugar Loaf Fire will be able to view digital images of their apparatus as its being built. The digital images shall be posted once a week starting when the body begins production or when the cab/chassis arrives and shall continue until the final completion of unit.

## **RESPONSIBILITY OF PURCHASER**

It shall be the responsibility of the purchaser to specify the details of the apparatus in addition to the requirements in NFPA 1901 needed by the manufacturer to build the apparatus, including:

- 1) Requirements not uniquely specified in NFPA 1901, such as the type of apparatus desired.
- 2) Any features of the apparatus desired in addition to, or in excess of, the requirements in NFPA 1901.

After acceptance of the fire apparatus, the purchaser shall be responsible for ongoing training of personnel to develop and maintain proficiency regarding the proper and safe use of the apparatus and the associated equipment.

## **RESPONSIBILITY OF CONTRACTOR**

The Contractor shall provide a detailed description of the apparatus, a list of equipment to be furnished, and other construction and performance details to which the apparatus shall conform. The detailed description of the apparatus shall include, but shall not be limited to,

1. Estimated In-Service Weight,
2. Wheelbase, Turning Clearance Radius,
3. Principal dimensions, Angle of Approach, Angle of Departure,
4. Transmission, Axle Ratios.

The Contractor's detailed description shall include a statement specifically describing each aspect of the delivered apparatus that will not be fully compliant with the requirements of this standard.

The purpose of these Contractor specifications shall be to define what the contractor intends to furnish and deliver to the purchaser.

Responsibility for the apparatus and equipment shall remain with the contractor until they are accepted by the purchaser.

## **VEHICLE STABILITY**

### **ROLLOVER STABILITY**

The apparatus shall meet the criteria defined below, or it shall be equipped with a stability control system defined below.

The apparatus shall meet the criteria defined in either of the following:

- 1) The apparatus shall remain stable to 26.5 degrees in both directions when tested on a tilt table in accordance with SAE J2180, *A Tilt Table Procedure for Measuring the Static Rollover Threshold for Heavy Trucks*.
- 2) The calculated or measured center of gravity (CG) shall be no higher than 80 percent of the rear axle track width.

Compliance shall be certified by testing, calculating, or measuring the apparatus or by comparing the apparatus to a compliant, substantially similar example apparatus and the certification shall be delivered with the fire apparatus.

The example apparatus shall be considered substantially similar if it includes a chassis with the same or higher CG height, the same or narrower rear axle track width, the same or greater water tank size and CG height, the same type of front and rear suspension and the same type and size of aerial device.

The apparatus shall be loaded with fuel, fire-fighting agents, hose, ladders, a weight of 250 lb in each seating position and weight equivalent to the Miscellaneous Equipment Allowance as defined in Table 12.1.2.

If the apparatus is designed to meet a specified higher equipment loading or larger hose bed capacity or to carry additional ground ladders, these greater loads shall be included in the testing, calculating or measuring.

The weight added to the fire apparatus for the purpose of test, calculation or measurement shall be distributed to approximate typical in-service use of the fire apparatus while not exceeding the manufacturer's published individual compartment weight ratings.

If the apparatus is equipped with a stability control system, the system shall have, at a minimum, a steering wheel position sensor, a vehicle yaw sensor, a lateral accelerometer and individual wheel brake controls.

### **FIRE APPARATUS PERFORMANCE**

The fire apparatus shall meet the requirements of this standard at elevations of 2000 ft (600 m) above sea level.

The fire apparatus shall meet all the requirements of this standard while stationary on a grade of 6 percent in any direction.

The fire apparatus shall meet the requirements of this standard in ambient temperature conditions between 32°F (0°C) and 110°F (43°C).

## **HIGHWAY PERFORMANCE**

The apparatus, when loaded to its estimated in-service weight, shall be capable of the following performance while on dry, paved roads that are in good condition:

- 1) Accelerating from 0 to 35 mph (55 km/hr) within 25 seconds on a 0 percent grade
- 2) Attaining a speed of 50 mph (80 km/hr) on a 0 percent grade
- 3) Maintaining a speed of at least 20 mph (32 km/hr) on any grade up to and including 6 percent

The maximum top speed of fire apparatus with a GVWR over 26,000 lb (11,800 kg) shall not exceed either 68 mph (109 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

If the combined water tank and foam agent tank capacities on the fire apparatus exceed 1250 gal (4732 L), or the GVWR of the vehicle is over 50,000 lb (22,680 kg), the maximum top speed of the apparatus shall not exceed either 60 mph (95 km/hr) or the manufacturer's maximum fire service speed rating for the tires installed on the apparatus, whichever is lower.

## **SERVICEABILITY**

The fire apparatus shall be designed to allow the manufacturer's recommended routine maintenance checks of lubricant and fluid levels to be performed by the operator without lifting the cab of a tilt-cab apparatus or without the need for hand tools.

Where special tools are required for routine service on any component of the apparatus, such tools shall be provided with the apparatus.

Apparatus components that interfere with repair or removal of other major components shall be attached with fasteners, such as cap screws and nuts, so that the components can be removed and installed with ordinary hand tools. These components shall not be welded or otherwise permanently secured into place.

## **FIRE APPARATUS DOCUMENTATION**

The contractor shall supply, at the time of delivery, at least one (1) copy of the following documents:

- 1) The manufacturer's record of apparatus construction details, including the following documents:
  - a) Owner's name and address
  - b) Apparatus manufacturer, model, and serial number
  - c) Chassis make, model, and serial number
  - d) GAWR of front and rear axles and GVWR
  - e) Front tire size and total rated capacity in pounds (kilograms)
  - f) Rear tire size and total rated capacity in pounds (kilograms)
  - g) Chassis weight distribution in pounds (kilograms) with water and manufacturer-mounted equipment (front and rear)
  - h) Engine make, model, serial number, rated horsepower and related speed, and governed speed; and if so equipped, engine transmission PTO(s) make, model, and gear ratio
  - i) Type of fuel and fuel tank capacity
  - j) Electrical system voltage and alternator output in amps
  - k) Battery make, model, and capacity in cold cranking amps (CCA)
  - l) Chassis transmission make, model, and serial number; and if so equipped, chassis transmission PTO(s) make, model, and gear ratio

- m) Ratios of all driving axles
  - n) Maximum governed road speed
  - o) Pump make, model, rated capacity in gallons per minute (liters per minute where applicable), maximum discharge pressure capability rating, and serial number
  - p) Pump transmission make, model, serial number, and gear ratio
  - q) Auxiliary pump make, model, rated capacity in gallons per minute (liters per minute where applicable), and serial number
  - r) Water tank certified capacity in gallons or liters
  - s) Foam tank (if provided) certified capacity in gallons (liters)
  - t) Aerial device type, rated vertical height in feet (meters), rated horizontal reach in feet (meters), and rated capacity in pounds (kilograms)
  - u) Paint manufacturer and paint number(s)
  - v) Company name and signature of responsible company representative
  - w) Weight documents from a certified scale showing actual loading on the front axle, rear axle(s), and overall fire apparatus (with the water tank full but without personnel, equipment, and hose)
- 2) Certification of compliance of the optical warning system (*see 13.8.16*)
  - 3) Siren manufacturer's certification of the siren (*see 13.9.1.1*)
  - 4) Written load analysis and results of the electrical system performance tests (*see 13.14.1 and Section 13.15*)
  - 5) Certification of slip resistance of all stepping, standing, and walking surfaces (*see 15.7.4.5*)
  - 6) If the apparatus has a fire pump, the pump manufacturer's certification of suction capability (*see 16.2.4.1*)
  - 7) If the apparatus is equipped with a fire pump and special conditions are specified by the purchaser, the pump manufacturer's certification of suction capacity under the special conditions (*see 16.2.4.2*)
  - 8) If the apparatus has a fire pump, a copy of the apparatus manufacturer's approval for stationary pumping applications (*see 16.3.1*)
  - 9) If the apparatus has a fire pump, the engine manufacturer's certified brake horsepower curve for the engine furnished, showing the maximum governed speed (*see 16.3.2.2*)
  - 10) If the apparatus has a fire pump, the pump manufacturer's certification of the hydrostatic test (*see 16.5.2.2*)
  - 11) If the apparatus has a fire pump with a maximum discharge pressure capability rating that exceeds the hydrostatic test pressure of 16.5.2.1, the pump manufacturer's certification of the hydrodynamic test
  - 12) If the apparatus has a fire pump, the certification of inspection and test for the fire pump (*see 16.13.1.1.5 or 16.13.1.2.4 as applicable*)
  - 13) If the apparatus is equipped with an auxiliary pump, the apparatus manufacturer's certification of the hydrostatic test (*see Section 17.13*)
  - 14) When the apparatus is equipped with a water tank, the certification of water tank capacity (*see Section 18.6*)
  - 15) If the apparatus has an aerial device, the certification of inspection and test for the aerial device (*see Section 19.24*)
  - 16) If the apparatus has an aerial device, all the technical information required for inspections to comply with NFPA 1911
  - 17) If the apparatus has a foam proportioning system, the foam proportioning system manufacturer's certification of accuracy (*see 20.10.4.2*) and the final installer's certification the foam proportioning system meets this standard (*see 20.11.2*)
  - 18) If the system has a CAFS, the documentation of the manufacturer's pre delivery tests (*see Section 21.9*)
  - 19) If the apparatus has a line voltage power source, the certification of the test for the power source (*see 22.15.7.2*)
  - 20) If the apparatus is equipped with an air system, air tank certificates (*see 24.5.1.2*), the SCBA fill station certification (*see 24.9.6*), and the results of the testing of the air system installation (*see 24.14.5 and 24.15.4*)
  - 21) Any other required manufacturer test data or reports

## **OPERATIONS AND SERVICE DOCUMENTATION**

The contractor shall deliver with the fire apparatus complete operation and service documentation covering the completed apparatus as delivered and accepted.

The documentation shall address at least the inspection, service, and operations of the fire apparatus and all major components thereof.

The contractor shall also deliver with the fire apparatus the following documentation for the entire apparatus and each major operating system or major component of the apparatus:

- 1) Manufacturer's name and address
- 2) Country of manufacture
- 3) Source for service and technical information
- 4) Parts replacement information
- 5) Descriptions, specifications, and ratings of the chassis, pump (if applicable), and aerial device (if applicable)
- 6) Wiring diagrams for low voltage and line voltage systems to include the following information:
  - a) Pictorial representations of circuit logic for all electrical components and wiring
  - b) Circuit identification
  - c) Connector pin identification
  - d) Zone location of electrical components
  - e) Safety interlocks
  - f) Alternator–battery power distribution circuits
  - g) Input/output assignment sheets or equivalent circuit logic implemented in multiplexing systems
- 7) Lubrication charts
- 8) Operating instructions for the chassis, any major components such as a pump or aerial device, and any auxiliary systems
- 9) Precautions related to multiple configurations of aerial devices, if applicable
- 10) Instructions regarding the frequency and procedure for recommended maintenance
- 11) Overall apparatus operating instructions
- 12) Safety considerations
- 13) Limitations of use
- 14) Inspection procedures
- 15) Recommended service procedures
- 16) Troubleshooting guide
- 17) Apparatus body, chassis and other component manufacturer's warranties
- 18) Special data required by this standard
- 19) A material safety data sheet (MSDS) for any fluid that is specified for use on the apparatus

The contractor shall deliver with the apparatus all manufacturer's operations and service documents supplied with components and equipment that are installed or supplied by the contractor.

## **NFPA REQUIRED DOCUMENTATION FORMAT - USB FLASH DRIVE**

The vehicle construction details and the operations and service documentation as required per NFPA 1901 latest edition shall be provided on a USB Flash Drive. These manuals shall be divided into sections for ease of reference. There shall be two (2) USB flash drives provided with the completed vehicle.

## **FIRE APPARATUS SAFETY GUIDE**

A Fire Apparatus Safety Guide published by Fire Apparatus manufacturer's Association shall be provided with delivered vehicle. This manual includes essential safety information for fire fighters, fire chiefs, apparatus mechanics, and fire department safety officers. The guide is applicable to municipal, wildland, and airport fire fighting apparatus manufactured on either custom or commercial chassis.

## **STATEMENT OF EXCEPTIONS**

The final-stage manufacturer shall deliver with the fire apparatus either a certification that the apparatus fully complies with all requirements of this standard or alternatively, a Statement of Exceptions specifically describing each aspect of the completed apparatus that is not fully compliant with the requirements of this standard at the time of delivery.

The Statement of Exceptions shall contain, for each noncompliant aspect of the apparatus or missing required item, the following information:

- 1) A separate specification of the section of the applicable standard for which compliance is lacking
- 2) A description of the particular aspect of the apparatus that is not in compliance therewith or required equipment that is missing
- 3) A description of the further changes or modifications to the delivered apparatus that must be completed to achieve full compliance
- 4) Identification of the entity that will be responsible for making the necessary post delivery changes or modifications or for supplying and installing any missing required equipment to the apparatus to achieve full compliance with this standard

Prior to or at the time of delivery of the apparatus, the Statement of Exceptions shall be signed by an authorized agent of the entity responsible for final assembly of the apparatus and by an authorized agent of the purchasing entity, indicating mutual understanding and agreement between the parties regarding the substance thereof.

## **CARRYING CAPACITY**

The GAWR and the GCWR or GVWR of the chassis shall be adequate to carry the weight of the completed vehicle when loaded to its estimated in-service weight. The manufacturer shall establish the estimated in service weight during the design of the vehicle.

The estimated in-service weight shall include the following:

1. The chassis, body and tank(s)
2. Full fuel, lubricant, and other chassis or component fluid tanks or reservoirs
3. Full water and other agent tanks
4. \*250 lb (114 kg) in each seating position
5. Fixed equipment such as pumps, aerial devices, generators, reels and air systems as installed
6. Ground ladders, suction hose, designed hose load in their hose beds and on their reels
7. An allowance for miscellaneous equipment that is the greatest of the following:
  - a) The values shown for items 1 - 7
  - b) A purchaser-provided list of equipment to be carried with weights
  - c) A purchaser-specified miscellaneous equipment allowance

The manufacturer shall engineer and design the fire apparatus such that the completed apparatus, when loaded to its estimated in-service weight, with all movable weights distributed as close as is practical to their intended in-service configuration, does not exceed the GVWR.

A final manufacturer's certification of the GVWR or GCWR, along with a certification of each GAWR, shall be supplied on a label affixed to the vehicle.

The fire apparatus manufacturer shall permanently affix a high-visibility label in a location visible to the driver while seated.

The label shall show the height of the completed unequipped fire apparatus in feet and inches (meters), the length of the completed fire apparatus in feet and inches (meters), and the GVWR in tons (metric tons).

Wording on the label shall indicate that the information shown was current when the apparatus was manufactured and that, if the overall height changes while the vehicle is in service, the fire department must revise that dimension on the plate.

Apparatus Type	Equip. Storage Area	Apparatus Size	Equipment Allowance	
			lb.	kg.
Special Service Fire Apparatus	Minimum of 120 cu ft (3.4 cu mt) of enclosed compartmentation.	10,000 lb to 15,000 lb (4,500 kg to 7,000 kg) GVWR	2,000	910
		15,001 lb to 20,000 lb (7,001 kg to 9,000 kg) GVWR	2,500	1,135
		20,001 lb to 30,000 lb (9,001 kg to 14,000 kg) GVWR	3,000	1,350
		30,001 lb to 40,000 lb (14,001 kg to 18,000 kg) GVWR	4,000	1,800
		40,001 lb to 50,000 lb (18,001 kg to 23,000 kg) GVWR	6,000	2,700
		50,001 lb to 60,000 lb (23,001 kg to 27,000 kg) GVWR	8,000	3,600
		60,001 lb and up (27,001 kg) GVWR	10,000	4,500

**TESTING**

**ROAD TEST**

Each apparatus shall be tested by the manufacturer before delivery to verify that it meets the following criteria;

Tests shall be conducted at a location and in a manner that does not violate local, state or provincial, or federal traffic laws. Tests shall be conducted on a dry, level, paved surface that is free of loose material, oil, or grease. Tests shall be conducted with the water and foam tanks full (water or product).

The apparatus shall accelerate from 0 to 35 mph (55 km/hr) within 25 seconds. The apparatus shall attain a speed of 50 mph (80 km/ hr).



The auxiliary braking system, if so equipped, shall function as intended by the auxiliary braking system manufacturer.

The air service brakes shall bring the apparatus to a complete stop from a speed of 20 mph (32.2 km/hr) in a distance not exceeding 35 ft (10.7 m).

The hydraulic service brakes shall bring the apparatus to a complete stop from a speed of 30 mph (48.2 km/hr) in a distance not exceeding 88 ft (26.8 m).

## **LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST**

The vehicles low voltage electrical system shall be tested and certified by the manufacturer. The certified test results shall be delivered with the completed vehicle. Tests shall be performed when the air temperature is between 0°F and 110°F (-18°C and 43°C).

### **TEST SEQUENCE**

The following three (3) tests shall be performed in the order in which they appear below. Before each test, the batteries shall be fully charged until the voltage stabilizes at the voltage regulator set point and the lowest charge current is maintained for ten (10) minutes. Failure of any of these tests shall require a repeat of the sequence.

#### **1. RESERVE CAPACITY TEST**

The engine shall be started and kept running until the engine and engine compartment temperatures are stabilized at normal operating temperatures and the battery system is fully charged. The engine shall be shut off and the minimum continuous electrical load shall be activated for ten (10) minutes.

All electrical loads shall be turned off prior to attempting to restart the engine. The battery system shall then be capable of restarting the engine. Failure to restart the engine shall be considered a test failure of the battery system.

#### **2. ALTERNATOR PERFORMANCE TEST**

##### **TEST AT IDLE**

The minimum continuous electrical load shall be activated with the engine running at idle speed. The engine temperature shall be stabilized at normal operating temperature. The battery system shall be tested to detect the presence of battery discharge current. The detection of battery discharge current shall be considered a test failure.

##### **TEST AT FULL LOAD**

The total continuous electrical load shall be activated with the engine running up to the engine manufacturer's governed speed. The test duration shall be a minimum of two (2) hours. Activation of the load management system shall be permitted during this test.

An alarm sounded by excessive battery discharge, as detected by the warning system required in 13.3.4, or a system voltage of less than 11.8 V dc for a 12 V nominal system, 23.6 V dc for a 24 V nominal system, or 35.4 V dc for a 42 V nominal system for more than 120 seconds shall be considered a test failure.

### **3. LOW VOLTAGE ALARM TEST**

The following test shall be started with the engine off and the battery voltage at or above 12 V for a 12 V nominal system, 24 V for a 24 V nominal system or 36 V for a 42 V nominal system.

With the engine shut off, the total continuous electrical load shall be activated and shall continue to be applied until the excessive battery discharge alarm activates. The battery voltage shall be measured at the battery terminals.

The test shall be considered a failure if the alarm does not sound in less than 140 seconds after the voltage drops to 11.70 V for a 12 V nominal system, 23.4 V dc for a 24 V nominal system, or 35.1 V for a 42 V nominal system.

The battery system shall then be able to restart the engine. Failure to restart the engine shall be considered a test failure.

### **LOW VOLTAGE - ELECTRICAL SYSTEM PERFORMANCE TEST**

#### **DOCUMENTATION**

The manufacturer shall deliver the following with the fire apparatus:

- 1) Documentation of the electrical system performance tests
- 2) A written electrical load analysis, including the following:
  - a) The nameplate rating of the alternator
  - b) The alternator rating
  - c) Each of the component loads specified that make up the minimum continuous electrical load
  - d) Additional electrical loads that, when added to the minimum continuous electrical load, determine the total continuous electrical load
  - e) Each individual intermittent electrical load

#### **WARRANTY**

A full statement shall be provided of the warranties for the vehicle(s) being bid. Warranties should clearly describe the terms under which the vehicle manufacturer accepts responsibility for the cost to repair defects caused by faulty design, quality of work or material and for the applicable period of time after delivery.

Cost of repairs refers to all costs related thereto including, but not limited to, the cost of materials and the cost of labor.

The Body Manufacturer shall warrant all materials and accessories used on the vehicle(s), whether fabricated by manufacturer or purchased from an outside source and will deal directly with the Sugar Loaf Fire on all warranty work.

#### **GENERAL LIMITED WARRANTY - TWO (2) YEARS**

The vehicle shall be free of defects in material and workmanship for a period of two (2) years or 36,000 miles (or 57,936 kilometers), whichever occurs first starting thirty (30) days after the original invoice date.

The Contractor must be the "single source" coordinator of all warranties on the vehicle.

#### **LOW VOLTAGE ELECTRICAL WARRANTY - FIVE (5) YEARS**

The vehicle low voltage electrical system shall be free of defects in material and workmanship for a period of five (5) years or 60,000 miles (or 96,561 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

### **STRUCTURAL WARRANTY - TEN (10) YEARS**

The body shall be free of structural or design failure or workmanship for a period of ten (10) years, or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date.

### **UNDERCOAT WARRANTY**

The body undercoating shall have a warranty provided by the manufacturer for the lifetime of the vehicle or twenty (20) years, whichever occurs first. The warranty shall be transferable between vehicle owners. Should the undercoating material applied to the underside of the body and wheel wells of the vehicle ever flake off, peel, chip or crack due to drying out, the damaged area shall be re-sprayed without charge to the vehicle owner.

### **PAINT LIMITED WARRANTY - TEN (10) YEARS**

The body shall be free of bubbling or peeling as a result of a defect in the method of manufacture for a period of ten (10) years or 100,000 miles (or 160,934 kilometers), whichever occurs first, starting thirty (30) days after the original invoice date. **Pro-rated warranties will not be acceptable.**

### **GRAPHICS LIMITED WARRANTY**

The 3M graphics installation shall be warranted for a period of two (2) years. The 3M materials installed on completed vehicle shall be warranted for seven (7) years. The 3M Diamond grade film (if specified) shall be warranted for ten (10) years.

### **CONSTRUCTION PERIOD**

The completed vehicle shall be delivered within four hundred ninety (490) days after pre-construction meeting and receipt and approval of any signed change orders from Sugar Loaf Fire.

Contractor shall not be held liable for delays of chassis delivery due to accidents, strikes, floods or other events not subject to their control. Contractor shall provide written notice to Sugar Loaf Fire as to delays and to what extent these delays have in completing vehicle within the stated construction time period.

### **OVERALL HEIGHT REQUIREMENT**

There is no overall height (OAH) restriction for this vehicle.

### **OVERALL LENGTH REQUIREMENT**

There is no overall length (OAL) restriction for this vehicle.

### **ANGLE OF APPROACH**

The angle of approach for this vehicle shall not be less than eight (8) degrees when it is loaded to the estimated in-service weight as specified by the current edition of NFPA 1901.

### **ANGLE OF DEPARTURE**

The angle of departure for this vehicle shall not be less than eight (8) degrees when it is loaded to the estimated in-service weight as specified by the current edition of NFPA 1901.

### **PRE-CONSTRUCTION CONFERENCE**

A pre-construction conference shall be required at the Contractor's factory for three (3) personnel from the Sugar Loaf Fire to finalize all construction details prior to manufacturing.

The Contractor shall at his/her expense, provide transportation, lodging, rental car and meal expenses during the pre-construction conference. Any travel distance greater than 250 miles shall be by non-stop commercial air travel.

### **FINAL INSPECTION CONFERENCE**

A final inspection conference shall be required at the Contractor's factory for three (3) personnel from the Sugar Loaf Fire to inspect the vehicle and construction details prior to shipment of the completed vehicle. This inspection shall take place after any specified striping and lettering is installed.

The Contractor shall at his/her expense, provide transportation, lodging, rental car and meal expenses during the final inspection conference. Any travel distance greater than 250 miles shall be by non-stop commercial air travel.

### **DELIVERY AND DEMONSTRATION**

The Contractor shall be responsible for the delivery of the completed unit to the Sugar Loaf Fire's location. On initial delivery of the apparatus, the Contractor shall supply a qualified representative to demonstrate the apparatus and provide initial instruction to representatives of the Sugar Loaf Fire regarding the operation, care and maintenance of the apparatus and equipment supplied at Sugar Loaf Fire location.

The Delivery Engineer shall set delivery and instruction schedule with the person appointed by Sugar Loaf Fire.

After delivery of the apparatus, the Sugar Loaf Fire shall be responsible for ongoing training of its personnel to proficiency regarding the proper and safe use of the apparatus and associated equipment.

## **CAB CHASSIS SPECIFICATION**

2022 F-550 Chassis 4x4 SD Crew Cab 179" WB DRW XLT

2022 F-550 Chassis 4x4 SD Crew Cab 179" WB DRW XLT

### **Packages**

663A Order Code 663A

*Includes:*

- *Transmission: TorqShift 10-Speed Automatic  
10R140 with neutral idle and selectable drive modes: normal, tow/haul, eco, deep sand/snow and slippery.*
- *Wheels: 19.5" x 6" Argent Painted Steel  
Hub covers/center ornaments not included.*
- *Radio: AM/FM Stereo w/MP3 Player  
Includes 7 speakers and auxiliary audio input jack.  
- SYNC 3 Communications & Entertainment System  
Includes enhanced voice recognition, 8" LCD capacitive touchscreen in center stack with swipe capability, pinch-to-zoom capability included with available voice-activated touchscreen navigation system, AppLink, 911 Assist, Apple CarPlay and Android Auto and 2 smart-charging USB ports. SYNC AppLink lets you control some of your favorite compatible mobile apps with your voice. It is compatible with select smartphone platforms. Commands may vary by phone and AppLink softwares.*
- *SiriusXM Radio  
Includes 1 I/P mounted center speaker and a 3-month prepaid subscription. Service is not available in Alaska and Hawaii. Subscriptions to all SiriusXM services are sold by SiriusXM after trial period. If you decide to continue service after your trial, the subscription plan you choose will automatically renew thereafter and you will be charged according to your chosen payment method at then-current rates. Fees and taxes apply. To cancel you must call SiriusXM at 1-866-635-2349. See SiriusXM customer agreement for complete terms at [www.siriusxm.com](http://www.siriusxm.com). All fees and programming subject to change. Sirius, XM and all related marks and logos are trademarks of Sirius XM Radio Inc.*
- *Cloth 40/20/40 Split Bench Seat  
Includes 20% center under-seat storage, center armrest, cupholder, storage, 2-way adjustable driver/passenger headrests and driver's side manual lumbar.*

### **Powertrain**

99T Engine: 6.7L 4V OHV Power Stroke V8 Turbo Diesel B20

*Includes Diesel Exhaust Fluid (DEF) tank, intelligent oil-life monitor and manual push-button engine-exhaust braking.*

*Includes:*

- *Dual 78-AH 750 CCA Batteries*
- 44G Transmission: TorqShift 10-Speed Automatic  
*10R140 with neutral idle and selectable drive modes: normal, tow/haul, eco, deep sand/snow and slippery.*
- X8L Limited Slip w/4.88 Axle Ratio
- 68M GVWR: 19,500 lb Payload Plus Upgrade Package  
*Includes upgraded frame, rear-axle and low deflection/high capacity springs. Increases max RGAWR to 14, 706. Note: See Order Guide Supplemental Reference for further details on GVWR.*

### **Wheels & Tires**

## Code Description

### TGK Tires: 225/70Rx19.5G BSW Traction (TGK)

*Includes 4 traction tires on the rear and 2 traction tires on the front. Not recommended for over the road applications; could incur irregular front tire wear and/or NVH.*

### 64Z Wheels: 19.5" x 6" Argent Painted Steel

*Hub covers/center ornaments not included.*

## Seats & Seat Trim

### 3 Cloth 40/20/40 Split Bench Seat

*Includes 20% center under-seat storage, center armrest, cupholder, storage, 2-way adjustable driver/passenger headrests and driver's side manual lumbar.*

## Other Options

### PAINT Monotone Paint Application

### 179WB 179" Wheelbase

### STDRD Radio: AM/FM Stereo w/MP3 Player

*Includes 7 speakers and auxiliary audio input jack.*

*Includes:*

- SYNC 3 Communications & Entertainment System

*Includes enhanced voice recognition, 8" LCD capacitive touchscreen in center stack with swipe capability, pinch-to-zoom capability included with available voice-activated touchscreen navigation system, AppLink, 911 Assist, Apple CarPlay and Android Auto and 2 smart-charging USB ports. SYNC AppLink lets you control some of your favorite compatible mobile apps with your voice. It is compatible with select smartphone platforms. Commands may vary by phone and AppLink softwares.*

- SiriusXM Radio

*Includes 1 I/P mounted center speaker and a 3-month prepaid subscription. Service is not available in Alaska and Hawaii. Subscriptions to all SiriusXM services are sold by SiriusXM after trial period. If you decide to continue service after your trial, the subscription plan you choose will automatically renew thereafter and you will be charged according to your chosen payment method at then-current rates. Fees and taxes apply. To cancel you must call SiriusXM at 1-866-635-2349. See SiriusXM customer agreement for complete terms at [www.siriusxm.com](http://www.siriusxm.com). All fees and programming subject to change. Sirius, XM and all related marks and logos are trademarks of Sirius XM Radio Inc.*

### 41H Engine Block Heater

### 41P Transfer Case Skid Plates

### 61J 6-Ton Hydraulic Jack

### 62R Transmission Power Take-Off Provision

*Includes mobile and stationary PTO modes.*

### 98R Operator Commanded Regeneration

### 67B 397 Amp Alternators

## Code Description

### 872 Rear View Camera & Prep Kit

*Pre-installed content includes cab wiring and frame wiring to the rear most cross member. Upfitters kit includes camera with mounting bracket, 20' jumper wire and camera mounting/aiming instructions.*

### 153 Front License Plate Bracket

*Standard in states requiring 2 license plates and optional to all others.*

### 41A Rapid-Heat Supplemental Cab Heater

*Includes:*

- 397 Amp Alternators

## Fleet Options

### 47J Fire/Rescue Prep Pkg w/EPA Special Emissions (LPO) Requires valid FIN code.

*Includes 7,000 lbs. max front springs/GAWR rating for configuration selected. Incomplete vehicle package - requires further manufacture and certification by a final stage manufacturer. Ford urges Fire/Rescue vehicle manufacturers to follow the recommendations of the Ford Incomplete Vehicle Manual and the Ford Truck Body Builders Layout Book (and pertinent supplements). NOTE 1: Stationary Elevated Idle Control (SEIC) has been integrated into the engine control module. NOTE 2: Engine calibration significantly reduces the possibility of depower mode when in stationary PTO operation. NOTE 3: Operator commanded regen allowed down to 30% of DPF filter full, instead of 100%. NOTE 4: Must meet the definition of an emergency vehicle, an Ambulance or Fire Truck per 40 CFR 86.1803.01 in the federal register. NOTE 5: California Code of Regulations allows for the sale of federally certified emergency vehicles in California.*

*Includes:*

*- 397 Amp Alternators*

*- Operator Commanded Regeneration*

### 942 Daytime Running Lamps (DRL) (LPO)

Requires valid FIN code.

*The non-controllable 942 Daytime Running Lamps (DRL) replace the standard Daytime Running Lamps (DRL) on/off cluster controllable.*

### WARANT Fleet Customer Powertrain Limited Warranty

Requires valid FIN code.

*Ford is increasing the 5-year 60,000-mile limited powertrain warranty to 5-years, 100,000 miles. Only Fleet purchasers with a valid Fleet Identification Number (FIN code) will receive the extended warranty. When the sale is entered into the sales reporting system with a sales type fleet along with a valid FIN code, the warranty extension will automatically be added to the vehicle. The extension will stay with the vehicle even if it is subsequently sold to a non-fleet customer before the expiration. This extension applies to both gas and diesel powertrains. Dealers can check for the warranty extension on eligible fleet vehicles in OASIS. Please refer to the Warranty and Policy Manual section 3.13.00 Gas Engine Commercial Warranty. This change will also be reflected in the printed Warranty Guided distributed with the purchase of every new vehicle.*

E4\_02 Vermillion Red

## Code Description

Requires Valid FIN Code.

### Emissions

425 50-State Emissions System

### Interior Color

3S\_01 Medium Earth Gray

## Dimensions

• Exterior length: 265.2" • Cab to axle: 60.0" • Exterior width: 80.0" • Exterior height: 81.8" • Wheelbase: 179.0" • Front track: 74.8" • Rear track: 74.0" • Turning radius: 25.6' • Rear tire outside width: 93.9" • Min ground clearance: 8.2" • Front legroom: 43.9" • Rear legroom: 43.6" • Front headroom: 40.8" • Rear headroom: 40.4" • Front hiproom: 62.5" • Rear hiproom: 64.7" • Front shoulder room: 66.7" • Rear shoulder room: 65.9" • Passenger volume: 131.7cu.ft. • Cargo volume: 52.1cu.ft. • Maximum cargo volume: 52.1cu.ft.

## Powertrain

\* **Powerstroke 330hp 6.7L OHV 32 valve intercooled turbo V-8 engine with diesel direct injection** \* **Recommended fuel : diesel** • federal • TorqShift 10 speed automatic transmission with overdrive • Part-time \* **Limited slip differential** • Fuel Economy Cty: N/A • Fuel Economy Highway: N/A \* **Transmission PTO provision**

## Suspension/Handling

• Front Mono-beam non-independent suspension with anti-roll bar, HD shocks \* **Rear DANA 130 rigid axle leaf spring suspension with anti-roll bar, HD shocks** • Firm ride Suspension • Hydraulic power-assist re-circulating ball Steering • Front and rear 19.5 x 6 argent steel wheels \* **LT225/70SR19.5 GBSW AT front and rear tires** • Dual rear wheels

## Body Exterior

• 4 doors • Conventional left rear passenger • Conventional right rear passenger • Driver and passenger power remote heated, manual folding door mirrors with turn signal indicator • Turn signal indicator in mirrors • Black door mirrors • Chrome bumpers • Trailer harness • Clearcoat paint • Front and rear 19.5 x 6 wheels • 2 front tow hook(s)

## Convenience

• Manual air conditioning with air filter \* **Supplemental heater** • Cruise control with steering wheel controls • Power windows • Driver and passenger 1-touch up • Driver and passenger 1-touch down • Remote power door locks with 2 stage unlock and illuminated entry • Manual tilt steering wheel • Manual telescopic steering wheel • Day-night rearview mirror • FordPass Connect 4G internet access • SYNC 3 911 Assist emergency SOS • Wireless phone connectivity • 2 1st row LCD monitors • Front and rear cupholders • Dual visor mirrors • Full overhead console • Driver and passenger door bins • Rear door bins • Upfitter switches

## Seats and Trim

• Seating capacity of 6 • Front 40-20-40 split-bench seat • 4-way driver seat adjustment • Manual driver lumbar support • 4-way passenger seat adjustment • Centre front armrest with storage • 60-40 folding rear split-bench seat • Cloth seat upholstery • Metal-look instrument panel insert

## Entertainment Features

• SiriusXM AM/FM/Satellite radio with radio data system • Auxiliary audio input • SYNC 3 external memory control • Steering wheel mounted radio controls • 7 speakers • Streaming audio • Fixed antenna

## Lighting, Visibility and Instrumentation

• Halogen aero-composite headlights • Delay-off headlights • Auto on/off headlights • Variable intermittent front windshield wipers • Deep tinted windows • Front and rear reading lights • Tachometer • Compass • Outside temperature display \* **Camera(s) - rear** • Trip computer • Trip odometer • Configurable digital/analog gauges

## Safety and Security

• 4-wheel ABS brakes • Brake assist • 4-wheel disc brakes • Driveline traction control • Dual front impact airbag supplemental restraint system • Dual seat mounted side impact airbag supplemental restraint system • Safety Canopy System curtain 1st and 2nd row overhead airbag supplemental restraint system • Remote activated perimeter/approach lighting • Power remote door locks with 2 stage unlock and panic alarm • Security system with SecuriLock immobilizer • MyKey restricted driving mode • Manually adjustable front head restraints • 3 manually adjustable rear head restraints



## Dimensions

### General Weights

\* Curb **8,373 lbs.** \* GVWR **19,500 lbs.**

\* Payload **11,290 lbs.**

### Front Weights

\* Front GAWR **7,000 lbs.** \* Front curb weight **4,978 lbs.**

Front axle capacity 7,000 lbs. \* Front spring rating **7,000 lbs.**

Front tire/wheel capacity 7,500 lbs.

### Rear Weights

\* Rear GAWR **14,706 lbs.** \* Rear curb weight **3,395 lbs.**

\* Rear axle capacity **14,706 lbs.** \* Rear spring rating **15,000 lbs.**

Rear tire/wheel capacity 15,000 lbs.

### Trailer Type

Harness Yes Brake controller Yes

Trailer sway control Yes

### General Trailering

\* 5th-wheel towing capacity **23300 lbs.** \* Gooseneck towing capacity **23300 lbs.**

Towing capacity 18500 lbs. \* GCWR **32500 lbs.**

### Fuel Tank type

Capacity 40 gal.

### Off Road

Min ground clearance 8 "

### Interior cargo

Cargo volume 52.1 cu.ft. Maximum cargo volume 52.1 cu.ft.

### Rear Frame

Height loaded 29 " Height unloaded 34 "

## Powertrain

### Engine Type

\* Brand **Powerstroke** Block material Iron

Cylinders V-8 Head material Aluminum

\* Ignition **Compression** \* Injection **Diesel direct injection**

\* Liters **6.7L** Orientation Longitudinal

\* Recommended fuel **Diesel** \* Valves per cylinder **4**

Valvetrain OHV \* Forced induction **Intercooled turbo**

### Engine Spec

\* Bore **3.90"** \* Compression ratio **15.8:1**

\* Displacement **406 cu.in.** \* Stroke **4.25"**

### Engine Power

SAEJ1349 AUG2004 compliant Yes \* Output **330 HP @ 2,600 RPM**

\* Torque **825 ft.-lb @ 2,000 RPM**

### Alternator

Type Dual Amps 397

### Battery

Amp hours 78 Cold cranking amps 750

Run down protection Yes Type Dual

### *Engine Extras*

\* **Block heater Yes**

### *Transmission*

Electronic control Yes Lock-up Yes

Overdrive Yes Speed 10

Type Automatic

### *Transmission Gear Ratios*

1st 4.696 2nd 2.985

3rd 2.146 4th 1.769

5th 1.52 6th 1.275

7th 1 8th 0.854

9th 0.689 10th 0.616

Reverse Gear ratios 4.866

### *Transmission Extras*

Driver selectable mode Yes Sequential shift control SelectShift

Oil cooler Regular duty \* **PTO provision Yes**

### *Drive Type*

4wd type Part-time Type Four-wheel

### *Drive Feature*

\* **Limited slip differential Mechanical** Traction control Driveline

\* **Power take-off provision Yes** Locking hub control Auto

Transfer case shift Electronic

### *Drive Axle*

Ratio 4.88

### *Exhaust*

Material Stainless steel System type Single

### *Emissions*

CARB Federal

### *Fuel Economy*

\* **Fuel type Diesel**

### *Engine Retarder*

\* **Type Yes**

### **Driveability**

#### *Brakes*

ABS 4-wheel ABS channels 3

Type 4-wheel disc Vented discs Front and rear

#### *Brake Assistance*

Brake assist Yes

#### *Suspension Control*

Ride Firm

#### *Front Suspension*

Independence Mono-beam non-independent Anti-roll bar Regular

### *Front Spring*

Type Coil \* **Grade HD**

### *Front Shocks*

Type HD

### *Rear Suspension*

\* **Independence DANA 130 rigid axle** Type Leaf

Anti-roll bar Regular

### *Rear Spring*

Type Leaf Grade HD

### *Rear Shocks*

Type HD

### *Steering*

Activation Hydraulic power-assist Type Re-circulating ball

### *Steering Specs*

# of wheels 2

## **Exterior**

### *Front Wheels*

Diameter 19.5" Width 6.00"

### *Rear Wheels*

Diameter 19.5" Width 6.00"

Dual Yes

### *Front and Rear Wheels*

Appearance Argent Material Steel

### *Front Tires (Will have a spare tire w/ jack)*

Aspect 70 Diameter 19.5"

Sidewalls BSW Speed S

\* **Tread AT** Type LT

Width 225mm LT load rating G

\* **RPM 645**

### *Rear Tires*

Aspect 70 Diameter 19.5"

Sidewalls BSW Speed S

\* **Tread AT** Type LT

Width 225mm LT load rating G

\* **RPM 645**

### *Wheels*

Front track 74.8" Rear track 74.0"

Turning radius 25.6' Wheelbase 179.0"

Rear tire outside width 93.9"

### *Body Features*

\* **Front license plate bracket Yes** Front splash guards Yes

\* **Skid plate(s) 1** Body material Aluminum

Side impact beams **Yes** Front tow hook(s) **2**

### ***Body Doors***

Door count **4** Left rear passenger **Conventional**

Right rear passenger **Conventional**

### ***Exterior Dimensions***

Length **265.2"** Body width **80.0"**

Body height **81.8"** Cab to axle **60.0"**

Axle to end of frame **47.2"** Frame section modulus **12.7cu.in.**

Frame yield strength (psi) **50000.0** Frame rail width **34.2"**

Front bumper to Front axle **38.3"** Cab to end of frame **107.2"**

Front bumper to back of cab **158.1"**

## **Safety**

### ***Airbags***

Driver front-impact **Yes** Driver side-impact **Seat mounted**

Overhead **Safety Canopy System curtain 1st and 2nd row**

Passenger front-impact **Yes**

Passenger side-impact **Seat mounted**

### ***Seatbelt***

Height adjustable **Front**

### ***Security***

Immobilizer **SecuriLock** Panic alarm **Yes**

Restricted driving mode **MyKey**

## **Seating**

### ***Passenger Capacity***

Capacity **6**

### ***Front Seats***

Split **40-20-40** Type **Split-bench**

### ***Driver Seat***

Fore/aft **Manual** Reclining **Manual**

Way direction control **4** Lumbar support **Manual**

### ***Passenger seat***

## **Selected Equip & Specs (cont'd)**

Fore/aft **Manual** Reclining **Manual**

Way direction control **4**

### ***Front Head Restraint***

Control **Manual** Type **Adjustable**

### ***Front Armrest***

Centre **Yes** Storage **Yes**

### ***Rear Seats***

Descriptor Split-bench Facing Front  
Folding 60-40 Folding position Fold-up cushion  
Type Fixed

#### *Rear Head Restraints*

Control Manual Type Adjustable  
Number 3

#### *Front Seat Trim*

Material Cloth Back material Cloth

#### *Rear Seat Trim Group*

Material Cloth Back material Carpet

### **Convenience**

#### *AC And Heat Type*

Air conditioning Manual Air filter Yes  
Underseat ducts Yes \* Supplemental heater Yes

#### *Audio System*

Auxiliary audio input Yes Radio SiriusXM AM/FM/Satellite  
Radio data system Yes Radio grade Regular  
Seek-scan Yes External memory control SYNC 3

#### *Audio Speakers*

Speaker type Regular Speakers 7

#### *Audio Controls*

Speed sensitive volume Yes Steering wheel controls Yes  
Voice activation Yes Streaming audio Bluetooth yes

#### *Audio Antenna*

Type Fixed

#### *LCD Monitors*

1st row 2 Primary monitor size (inches) 8

#### *Cruise Control*

Cruise control With steering wheel controls

#### *Convenience Features*

Retained accessory power Yes 12V DC power outlet 3  
Emergency SOS SYNC 3 911 Assist Wireless phone connectivity Bluetooth  
120V AC power outlet 2 Smart device integration Mirroring  
Upfitter switches Yes

#### *Door Lock Activation*

Type Power with 2 stage unlock Remote Keyfob (all doors)  
Integrated key/remote Yes

#### *Door Locks Extra FOB Controls*

Remote engine start Smart device only

#### *Instrumentation Type*

Appearance Digital/analog Configurable Yes

#### *Instrumentation Gauges*

Tachometer Yes Engine temperature Yes

\* **Turbo/supercharger boost Yes** Transmission fluid temp Yes

Engine hour meter Yes

#### *Instrumentation Warnings*

Oil pressure Yes Engine temperature Yes

Battery Yes Lights on Yes

Key Yes Low fuel Yes

Door ajar Yes Service interval Yes

Brake fluid Yes

#### *Instrumentation Displays*

Clock In-radio display Compass Yes

Exterior temp Yes Systems monitor Yes

\* **Camera(s) - rear Yes**

#### *Instrumentation Feature*

Trip computer Yes Trip odometer Yes

#### *Steering Wheel Type*

Material Urethane Tilting Manual

Telescoping Manual

#### *Front Side Windows*

Window 1st row activation Power

#### *Windows Rear Side*

2nd row activation Power

#### *Window Features*

1-touch down Driver and passenger 1-touch up Driver and passenger

Tinted Deep

#### *Front Windshield*

Wiper Variable intermittent

#### *Rear Windshield*

Window Fixed

#### **Interior**

##### *Driver Visor*

Mirror Yes

##### *Passenger Visor*

Mirror Yes

##### *Rear View Mirror*

Day-night Yes

##### *Headliner*

Coverage Full Material Cloth

### *Floor Trim*

Coverage Full Covering Carpet

Mats Carpet front and rear

### *Trim Feature*

Instrument panel insert Metal-look Gear shifter material Urethane

Interior accents Chrome

### *Lighting*

Dome light type Fade Front reading Yes

Illuminated entry Yes Rear reading Yes

Variable IP lighting Yes

### *Overhead Console Storage*

Storage Yes Type Full

### *Storage*

Driver door bin Yes Front Beverage holder(s) Yes

Glove box Locking Passenger door bin Yes

Seatback storage pockets 2 Illuminated Yes

Rear yes Yes Instrument panel Covered bin

Dashboard Yes Rear door bins Yes

1st row underseat Locking

### *Legroom*

Front 43.9" Rear 43.6"

### *Headroom*

Front 40.8" Rear 40.4"

### *Hip Room*

Front 62.5" Rear 64.7"

### *Shoulder Room*

Front 66.7" Rear 65.9"

### *Interior Volume*

Passenger volume 131.7 cu.ft.

## **Warranty**

### **Standard Warranty**

#### *Basic*

Distance 36,000 miles Months 36 months

#### *Powertrain*

Distance 60,000 miles Months 60 months

#### *Corrosion Perforation*

Distance Unlimited miles Months 60 months

#### *Roadside Assistance*

Distance 60,000 miles Months 60 months

### **Additional Warranty**

#### *Diesel Engine*

Distance 100,000 miles Months 60 months

## **CAB TO AXLE DIMENSION**

Cab to axle will be 60".

## **CHASSIS MODIFICATIONS**

### **LUBRICATION AND TIRE DATA PLATE**

A permanent label in the driving compartment shall specify the quantity and type of the following fluids used in the vehicle and tire information:

- Engine oil
- Engine coolant
- Chassis transmission fluid
- Pump transmission lubrication fluid . . (if applicable)
- Pump priming system fluid, if applicable . . (if applicable)
- Drive axle(s) lubrication fluid
- Air conditioning refrigerant . . (if applicable)
- Air conditioning lubrication oil . . (if applicable)
- Power steering fluid
- Cab tilt mechanism fluid . . (if applicable)
- Transfer case fluid . . (if applicable)
- Equipment rack fluid (if applicable)
- CAFS air compressor system lubricant . . (if applicable)
- Generator system lubricant . . (if applicable)
- Front tire cold pressure
- Rear tire cold pressure
- Maximum tire speed ratings

### **VEHICLE DATA PLATE**

A permanent label in the driving compartment which indicates the following:

- Filter part numbers for the;
  - Engine
  - Transmission
  - Air
  - Fuel
- Serial numbers for the;
  - Engine
  - Transmission
- Delivered Weights of the Front and Rear Axles
- Paint Brand and Code(s)
- Sales Order Number



## **OVERALL HEIGHT, LENGTH DATA PLATE (US)**

The fire apparatus manufacturer shall permanently affix a high-visibility label in a location visible to the driver while seated.

The label shall show the height of the completed unequipped vehicle in feet and inches (meters), the length of the completed vehicle in feet and inches (meters to nearest 1/10th), and the GVWR in tons (metric tons).

Wording on the label shall indicate that; "The information shown was current when the apparatus was manufactured. If the overall height changes while the vehicle is in service, the fire department must revise that dimension on the plate".

## **PERSONNEL CAPACITY**

A label that states the number of personnel the vehicle is designed to carry shall be located in an area visible to the driver.

## **SEAT BELT WARNING - FAMA06/07**

A safety sign FAMA06 shall be visible from each seat that is not equipped with occupant restraint and therefore not intended to be occupied while the vehicle is in motion.

A safety sign FAMA07, which warns of the importance of seat belt use, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

## **EQUIPMENT MOUNTING FAMA10**

A safety sign FAMA10, which warns of the need to secure items in the cab, shall be visible inside the cab.

## **FIRE SERVICE TIRES - FAMA12**

A safety sign FAMA12, which warns of the special requirements for fire service-rated tires, shall be visible to the driver entering the cab of any apparatus so equipped.

## **HELMET WARNING - FAMA15**

A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

## **CLIMBING METHOD - FAMA23**

A safety sign FAMA23, which warns of the proper climbing method, shall be visible to personnel entering the cab and at each designated climbing location on the body.

## **REAR STEP CROSSWALK WARNING - FAMA24**

A safety sign FAMA24, which warns personnel not to ride on the vehicle, shall be located at the rear step areas and at any cross walkways.

## **FINAL STAGE MANUFACTURER VEHICLE CERTIFICATION**

A final stage manufacturer vehicle certification label shall be provided and installed in the driver cab door jamb area.

### **OEM FRONT BUMPER REPLACEMENT**

An SVI Extreme Contoured one-piece, fully welded steel construction front bumper shall be bolted in place of the OEM bumper. Two (2) 3/4" steel tow eyes shall be provided on front with 3/4" opening.

Bumper shall have a two-stage finish using epoxy pre-coating and high-grade textured black powder coating for durability and long lasting corrosion resistance.

### **FRONT BUMPER PUSH BAR / GRILLE GUARD**

The front bumper shall be provided with a steel push bar / grille guard combination welded to bumper.

### **FRONT MOUNTED WINCH**

The front bumper extension shall be provided with a heavy duty winch installation. The winch shall be a Ramsey RE-12000R, 12 volt electric, 12,000 lb. capacity winch.

The winch shall be equipped with 100' of 3/8" galvanized cable.

A 25' remote control shall be provided with the assembly that permits the Operator to stand at a safe operating distance from the cable and winch

The cable shall end with a clamp type loop and a drop forged heavy duty hook. The cable shall feed through a full captive type 4-way roller and guide assembly.

### **GROUND LIGHTS**

There shall be two (2) OnScene 8" Access white LED lights installed below bumper capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting shall be switchable but activated automatically when the vehicle park brake is set.

### **SIREN SPEAKER**

One (1) Whelen model SA314A 100 watt aluminum, 6.4" x 6.1" x 3.1" deep siren speaker shall be provided and located behind grill or front bumper with natural aluminum finish.

The solid state siren speaker shall be vibration resistant. The SA314A shall comply with California Title XIII, Class A, and SAE J1849 requirements and with OSHA 1910.95 Guidelines regarding "Permissible Noise Exposure". All mounting hardware shall be stainless steel and covered by a two year factory warranty.

The siren speaker shall be located on the streetside of front bumper.

### **SPEAKER GRILLE**

The specified speaker(s) shall have an "SVI" grille over speaker with polished stainless steel finish.

## AIR INTAKE SYSTEM

An air filter shall be provided in the engine's air intake system by the body builder. Air inlet restrictions shall not exceed the engine manufacturer's recommendations.

The air inlet shall be equipped with a means of separating water and burning embers from the air intake system.

This requirement shall be permitted to be achieved by either of the following methods:

1. Provision of a device such that burning particulate matter larger than 0.039 in. (1.0 mm) in diameter cannot reach the air filter element.
2. Provision of a multi screen ember separator capable of meeting the test requirements defined in the Parker Hannafin, Racor Division, publication LF 1093-90, *Ember Separation Test Procedure*, or an equivalent test.

## EXHAUST

The exhaust system shall be as provided by cab/chassis manufacturer.

## ZONE A - FRONT WARNING LIGHTS, UPPER


There shall be one (1) Whelen Freedom F4N0QLED LED 60" lightbar permanently mounted to the cab roof.

The lightbar configuration (streetside to curbside) shall be:

<u>SECTION</u>	<u>INTERNAL COMPONENTS</u>	<u>LENS COLOR</u>
1	Red Side LED	Clear
2	Red Front Corner LED	Clear
3	<b>TIR6 LED Take-Down</b>	Clear
4	White Super Long-LED	Clear
5	Blank	Clear
6	<b>Blue</b> Super Long-LED	Clear
7	Blank (Opticom if specified)	Clear
8	Blank (Opticom if specified)	Clear
9	Red Super Long-LED	Clear
10	Blank	Clear
11	White Super Long-LED	Clear
12	<b>TIR6 LED Take-Down</b>	Clear
13	Red Front Corner LED	Clear
14	Red Side LED	Clear

**Freedom® IV Series Light Bar Order Form/Worksheet**

Configuration

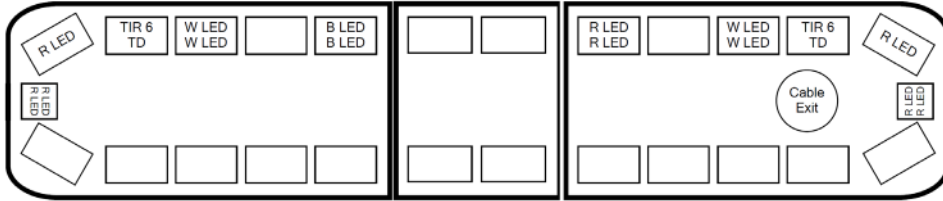


The lightbar(s) shall be separately controlled at switch panel in the cab.

**ZONE A - FRONT WARNING LIGHTS**

There shall be two (2) Whelen surface mount ION Series LED light(s) with wide angle optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns.

- Each light shall have:
- One (1) Red LED, One (1) Blue LED
  - Clear Lens
  - Black Flange
- Red Light Streetside / Blue Light Curbside

Lenses

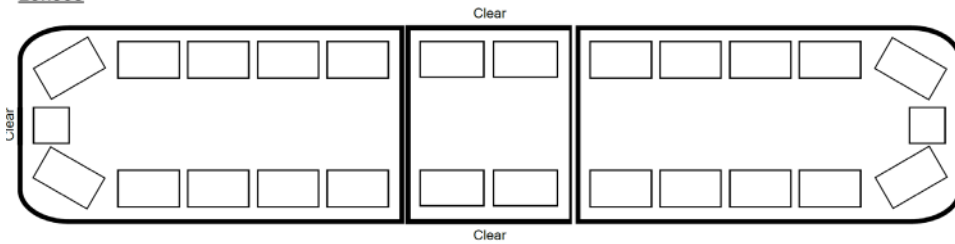

The Lights shall be controlled at the Switch Panel in Cab.

**ZONES B AND D - CAB INTERSECTOR LIGHT (CAB FRONT CORNERS)**

There shall be two (2) Whelen surface mount ION Series LED light(s) with wide angle optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns.

- Each light shall have:
- Red LEDs
  - Clear Lens
  - Black Flange

The Lights shall be controlled at the Switch Panel in Cab.

**GROUND CLEARANCE**

A 2" suspension leveling lift shall be installed to level vehicle and increase ground clearance. The components shall be readily available, and not custom built. Payload must not be adversely affected by any changes in the suspension. Drive lines must not be adversely affected by any changes in the suspension.

## **COMMUNICATION RADIO/ANTENNA INSTALLATION**

There shall be one (1) mobile communication radio(s) with antenna installed in the cab. The location of radio shall be determined by the Sugar Loaf Fire at the pre-construction meeting. All required radio programming shall be responsibility of Sugar Loaf Fire. Radio(s) may not be fully tested if no radio program is provided with radio and will be responsibility of Sugar Loaf Fire after delivery.

Radio shall be installed per Manufacturer's requirements and wired for proper 12 volt power and ground.

- Radio shall be provided by Sugar Loaf Fire.

## **SEATING MODIFICATION**

The center portion of the 40/20/40 split bench seat shall be removed to accommodate the installation of the specified console.

## **SEAT BELT COLOR AND MOUNTING**

The seat belt webbing color requirement of 14.1.3.3 shall not apply to vehicles with a GVWR of 19,500 lb (8,845 kg) or less.

Section 14.1.3.3 of the NFPA 1901 Standards, requires all seat belt webbing in cab to be bright red or bright orange in color, and the buckle portion of the seat belt shall be mounted on a rigid or semi rigid stalk such that the buckle remains positioned in an accessible location.

## **SEAT BELT WEB LENGTH - COMMERCIAL CAB**

The chassis seat belt web length as supplied by the commercial chassis manufacturer will not be compliant to NFPA Standards 14.1.3.2 and 14.1.3.3.

Sections 14.1.3.2 and 14.1.3.3 of the NFPA 1901 standards, require the effective seat belt web length for a Type 1 lap belt for pelvic restraint to be a minimum of 60", and a Type 2 pelvic and upper torso restraint-style seat belt assembly to be a minimum of 110".

Per Sugar Loaf Fire specification for a commercial chassis, this emergency vehicle may not have seat belts of this required length. These belts may not provide sufficient length for large firefighters in bunker gear. This specification for an emergency fire apparatus for these seat belts shall be non-compliant to NFPA 1901 standards, effective at the time of order.

Seat Belt/VDR System: UPGRADE TO PICK SYSTEM

## **IGNITION KEY**

If the vehicle is specified to have an ignition key it will be attached to steering column or dash with vinyl covered steel cable.

## **SIX (6) – LED TIRE PRESSURE VISUAL INDICATORS**

Each tire valve stem shall be equipped with an LED Tire Alert (or equal), heavy duty valve cap LED indicator that indicates proper tire pressure. The LED Tire Alert valve cap is self-calibrating. When the cap is mounted on the valve stem the first time, it will memorize that tire pressure, and can be set to recognize a drop in pressure as little as 6 psi. It can be checked for functionality and battery condition by simply unscrewing the cap. If it is in working condition, it will immediately start blinking.

## **HELMET STORAGE, DRIVING AREA**

No helmet storage is required in the cab driving area. A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

## **HELMET STORAGE, CREW AREA**

No helmet storage is required in the cab crew area. A safety sign FAMA15, which warns not to wear helmets while the vehicle is in motion, shall be visible from each seat that is intended to be occupied while the vehicle is in motion.

## **CAB TESTING CERTIFICATION**

Section 14.3.2 of the NFPA 1901 standards, 2009 edition, require the cabs on apparatus with a GVWR greater than 26,000 lb. (11,800 kg) shall meet the requirements of one of the following sets of standards:

- 1) European Occupant Protection Standard ECE Regulation No. 29.
- 2) SAE J2422 Cab Roof Strength Evaluation - Quasi-Static Loading Heavy Trucks.

Per Sugar Loaf Fire specification for a commercial chassis, this emergency vehicle may not have a cab that has been tested to these standards. This specification for an emergency fire apparatus for the cab testing requirements shall be non-compliant to NFPA 1901 standards, effective at the time of the bid opening.

## **CAB INTERIOR COMPONENT PAINT COLOR, OEM SUPPLIED**

Powder coat shall be hammertone silver/grey. Cardinal T064-GR05

## **MUDFLAPS**

There shall be 1/4" rubber mudflaps with logo provided and installed behind rear axle tires to prevent throwing road debris and lower road spray.

## **AUTOMATIC TIRE CHAINS**

The completed unit shall have OnSpot automatic tire chains provided and installed on the rear axle to provide traction while traveling on ice and snow at speeds between 2 and 35 MPH.

## **TIRE CHAINS ACTIVATION**

The tire chains shall be activated by a dashboard switch easily accessible from the drivers seat. The switch shall be complete with a red switch guard to avoid accidental engagement of the automatic tire chains. The switch guard shall be properly labeled with a sticker with operating instructions provided.

The tire chains shall be interlocked with the transmission and shall engage only if the vehicle is traveling 30 MPH or less. After traveling over 30 MPH, the vehicle must be reduced to a speed below 5 MPH for the tire chains to be engaged or re-engaged.

- Automatic tire chain system shall be provided with a 12 VDC air compressor kit to provide air source on a non-air brake provided chassis.

## **ROAD EMERGENCY SAFETY KIT**

The completed unit shall be supplied with one (1) set of three (3) dual faced reflective triangles, and three (3) warning flares complete with storage case per DOT requirements.

One (1) 2.5 lb. ABC type vehicle fire extinguisher with bracket per DOT requirements shall be provided and mounted inside cab area.

## **FRONT CAB INTERIOR COMPONENTS**

### **CAB CONSOLE**

A center cab console shall be provided between the Driver's and Officer's seats extending to rear wall of cab. Console shall be as large as possible and fabricated of 1/8" smooth aluminum. A textured powder coat paint finish shall be provided for durability and finished appearance.

Console shall include;

- Forward section of cab console shall include;

### **ROCKER SWITCH PANEL**

The control of the 12 volt equipment installed on chassis and body shall be centrally located in the cab. The individual rocker style switches shall be located on a separate electrical panel, complete with backlit name tags describing function of each individual switch. The back lighting shall have two (2) levels of intensity, low level lights activated when the vehicle lights or ignition switch is turned "On", and high level lights activated when individual switch is turned "On". An internally lighted rocker switch shall be furnished to the left of specified emergency lighting switches, and identified as "MASTER EMERGENCY SWITCH".

Switch circuitry shall be on a printed circuit board. The lights shall be solid state type and have a 100,000 hour life span.

#### **Switch Postion:**

- 1. EMERGENCY MASTER**
- 2. FRONT SCENE**
- 3. LEFT SCENE**
- 4. RIGHT SCENE**
- 5. REAR SCENE**

## **6. GROUND LIGHTS**

## **7. BLANK**

## **8. LOAD MANAGER INDICATOR**

- Cab console, panel position forward shall include;
- There shall be one (1) communications radio and/or siren 3" recess mount(s) with black powdercoat paint finish in specified console.
- Cab console, panel position center shall include;

## **ELECTRONIC SIREN**

One (1) Whelen model 295SLSA1 electronic siren control with selectable 100 or 200 watt output, hands-free operation, user selectable siren tones, park kill, and standard hard wired microphone shall be provided and installed in cab within easy reach of Driver. Siren power shall be wired through the master warning light switch.

- There shall be one (1) communications radio and/or siren 3" recess mount(s) with black powdercoat paint finish in specified console.

The specified siren functions shall be controlled by siren mounted switches.

- Cab console, panel position rearward shall include;

The lights shall be controlled by a Whelen TACTL5 control located in cab dash or center console area and provide; Left Arrow, Right Arrow, Center Out, and Wig-Wag patterns. The LED display on the control head shall replicate the Traffic Advisor's directional sequence. The TACTL5 shall have a rear panel dip switch for the ability to set eight additional Scan-Lock™ flash patterns. The wig-wag light pattern shall be activated with the E-Master and can be switched to the other patterns at any time through the control panel.

- Cab console, center position forward shall include;
  - One (1) 12 VDC cigarette style power port(s) shall be provided in cabinet with dust cover.
- Power port shall be wired battery direct.
  - One (1) 12 VDC USB dual charger port(s) shall be provided in console with dust cover.
- Power port shall be wired battery direct.
- Cab console, rear position shall include;
- Cab console area provided with open storage area.
  - The open storage area shall be provided with two (2) adjustable dividers.



## **FUEL FILL**

There shall be one (1) chassis supplied fuel fill mounted in the streetside exterior wheel well panel, behind the rear axle.

## **DEF FLUID FILL**

The DEF fluid fill shall be as supplied by commercial cab/chassis manufacturer and located on the streetside fender panel.

## **LIGHT TOWER**

One (1) Command Light Knight 2, KL Series light tower(s) shall be provided and installed on the completed unit.

The Command Light shall be covered by a five (5) year limited warranty from defects in materials and workmanship. An operation, maintenance, and parts manual shall be provided with the completed unit.

### **Light Tower Construction and Design**

The Command Light assembly shall be of aluminum construction, with stainless steel shafts and bronze bushings for long life and low maintenance.

The electrically controlled unit shall not require usage of the vehicle's air supply for operation, thereby eliminating the chance for air leaks in the vehicle braking system. Hydraulic or pneumatic type floodlights are not acceptable alternatives to the specified all electric light tower.

The light tower shall be tested to in wind conditions of 90 mph (150 kph) minimum. Other type floodlights that have not been tested to these conditions are not acceptable.

The light tower shall be capable of overhanging the side or back of the vehicle to provide maximum illumination to the vicinity adjacent to the vehicle for the safety of emergency personnel in high traffic conditions. Any tower that is only capable of rotations at the top of a pole is not an acceptable alternative to the specified tower.

### **Light Tower Electrical System**

The light tower shall be a two-stage articulating device with a lighting bank on top of the second stage capable of continuous 360 degree rotation. The light shall be elevated by electric linear actuators, one (1) actuator shall elevate the light bank and one (1) actuator shall adjust the light bank angle from 0 to 110 degrees. Power for the light bank shall be supplied through power collecting rings thus allowing continuous 360 degree rotation in either direction.

The tower base shall have a light that illuminates the envelope of motion during any movement of the light tower mast per NFPA 1901.

A red flashing or rotating light located in the driving compartment shall be illuminated automatically whenever the vehicles parking brake is not fully engaged, indicating that the light tower is not in stowed position, as required by NFPA 1901.

### Light Tower Floodlights

The Command Light model KL415D-W2 shall be equipped with the following bank of floodlights:

Floodlight manufacturer:	Whelen Engineering
Number of lamp heads:	Four (4) Pioneer Plus PFH2BLED
Voltage:	12 VDC
Watts of each lamp head:	150 watt
Total watts of light tower:	750 watts
Total lumens of light tower:	81,044
Configuration:	The light heads shall be mounted with two (2) on each side of the light tower, giving two (2) vertical lines of two (2) when the lights are in the upright position.

### Light Tower Backlight Option

A backlight option shall be provided on the light tower. The lower pair of light heads shall be capable of being rotated about a horizontal axis 180 degree, providing light down on the vehicle or to the opposite side of the vehicle while allowing the fixed lights to remain pointed at the scene.

The hand-held remote control shall have an additional switch supplied for the backlight rotation option.

### Light Tower Paint

The light tower shall be electro-statically powder coated with a hammer tone gray color.

### Light Tower Controls

The light tower(s) shall be operated with a hand-held 15-foot umbilical line remote control. The storage station for the remote control unit shall be equipped with a button to activate the "Auto-Park" automatic nesting feature. The remote control shall be located per the itemized compartment list and include;

Three (3) switches; one (1) for each pair of lights.

One (1) switch for light bank rotation.

One (1) switch for elevating lower stage.

One (1) switch for elevating upper stage.

One (1) switch for optional light bank rotation.

One (1) switch for the optional strobe.

One (1) indicator light to indicate when light bank is out of the roof nesting position.

One (1) indicator light to indicate when light bank is rotated to proper nesting position.

### Light Tower Mounting

The light tower shall be mounted to roof of the commercial cab which shall be reinforced as necessary to support weight of the light tower.

Where the light tower is to be mounted above a finished walk-in area; the roof backing plates and structure shall have threaded holes to allow removal of light tower without removal of the interior paneling.

Where the light tower is mounted in close proximity to other roof mounted items (i.e. antennas, air conditioners, and weather stations) the light tower shall be orientated in order to help prevent a operator driven collision.

## **BODY DESIGN**

The importance of public safety associated with emergency vehicles requires that the construction of this vehicle meet the following specifications. These specifications are written to establish the minimum level of quality and design. All Bidders shall be required to meet these minimum requirements.

It is the intent of these specifications to fully describe the requirements for a custom built emergency type vehicle. In order to extend the expected service life of this vehicle, the body module shall be removable from the chassis frame and be capable of being installed on a new chassis.

The sheet metal material requirements, including alloy and material thickness, throughout the specifications are considered to be a minimum. Since such materials are available to all Manufacturers, the material specifications shall be strictly adhered to.

The fabrication of the body shall be formed sheet metal. Formed components shall allow the Sugar Loaf Fire to have the body repaired locally in the case where any object has struck the body and caused damage. The use of proprietary extrusions will prevent the Sugar Loaf Fire from such repair and shall NOT be used. All fabricated body components to be cut by a laser or water-jet for superior cut edge quality.

Following construction of the subframe, which supports the apparatus body, the sheet metal portion of the body shall be built directly on the subframe. The joining of the subframe and body shall be of a welded integral construction.

The sheet metal fabrication of the body shall be performed using inert gas continuous feed welders only. The entire body shall be welded construction. The use of pop rivets in any portion of structural construction may allow premature failure of the body structure. Therefore, pop rivets shall NOT be used in the construction of the structural portions of the body. This includes side body sheets, inner panels of compartment doors, and any other structural portions of the body.

## **EXTERIOR ALUMINUM BODY**

The fabrication of the body shall be constructed from aluminum 3003H-14 alloy smooth plate. This shall include compartment front panel, vertical side sheets, side upper rollover panels, rear panels and compartment door frames.

The body compartment floors and exterior panels shall be constructed with not less than 3/16" (.187) aluminum 3003H-14 smooth plate. Interior compartment dividing walls shall be constructed with not less than 1/8" (.125) aluminum 3003H-14 smooth plate. Lighter gauge sheet metal will not be acceptable in these areas, No Exceptions.

The front and rear corners of body shall be formed as part of the front or rear body panels. This provides a stronger body corner and finished appearance. The use of extruded corners, or caps will not be acceptable, No Exceptions.

The door side frame openings shall be formed "C" channel design. An electrical wiring conduit raceway running the full length of exterior compartments shall be provided. This raceway shall contain all 12 volt wiring running to the rear of the apparatus, permitting easy accessibility to wiring.

Individual compartment modules, with dead air space voids between compartments, will not be an acceptable method of compartment construction.

The compartments shall be an integral part of the body construction. Compartment floors from front of body to ahead of rear axle, also from rear axle to rear of body shall be single one-piece sections. Compartment floors shall be preformed, then positioned in body and welded into final position.

Compartment floors shall have a "sweep-out" design with door opening threshold positioned lower than compartment floor, permitting easy cleaning of compartments. Angles, lips, or door moldings are not acceptable in the base of compartment door opening. One-way rubber drain valves shall be provided in compartment floors so that a water hose may be used to flush-out compartment area.

All exterior seams in sheet metal below frame, and around the rear wheel well area shall be welded and caulked to resist moisture from entering the compartments. All other interior seams and corners shall be sealed with silicone based caulk prior to painting.

Only stainless steel bolts, nuts, and sheet metal screws shall be used in mounting exterior trim, hardware and equipment.

### **DRIP RAILS**

The body shall have drip rails over the side full height compartments. The drip rails shall be formed into the upper body panels providing a ridged lower panel and a flat upper body panel surface. The use of mechanically fastened, taped or glued on drip rails will not be acceptable, No Exceptions.

### **ROOF CONSTRUCTION**

The roof structure shall be integral with the body sheet metal construction and shall be an all welded assembly. The body roof structure shall be overlaid with not less than 3/16" aluminum 3003H-14 alloy tread plate and welded to roof structure and body sheet metal. All seams in roof material shall be fully and continuously welded to resist entry of moisture.

There shall be a total of four (4) 2" x 2" x 1/4" 6061-T6 alloy aluminum "C" channels running the length of body, two (2) on each outboard side. These "C" channels shall be used for roof support and in addition shall be used for mounting of any specified reels. This open "C" channel design along with special reel mounting clips allows for a universal location of any specified reels within each compartment.

In between the two (2) center "C" channels running the length of body shall be 2" x 2" x 1/4" 6061-T6 alloy aluminum tubing running in between and welded in place on approximate 16" centers to support roof and/or walkway structure if specified.

A 2" formed radius shall be provided along the body sides and utilized as a wiring trough. The use of aluminum extrusions in this area shall not be acceptable, .

### **BODY SUBFRAME**

The chassis frame rails shall be fitted with 1/4" custom extruded UHMW polyethylene rail cap to isolate the body frame members from direct contact with chassis frame rails.

The body subframe shall be constructed from 6061T6 aluminum alloy tubing. Subframe shall consist of two (2) 2" x 4" x 1/4" aluminum tubes minimum, the same width as the chassis frame rails. Welded to this tubing shall be cross members of 2" x 4" x 1/4" aluminum. Smaller dimension, lighter gauge tubing or angle material subframe shall not be accepted.

These cross members shall extend the full width of the body to support the compartments. Cross members shall be located at front and rear of the body, below compartment divider walls, and in front and rear of wheel well opening. Additional aluminum cross members shall be located on 16" centers, or as necessary to support walkway or heavy equipment.

To form the frame, the tubing shall be beveled and welded at each joint using 5356 aluminum alloy welding wire.

## **BODY MOUNTING**

For optimum chassis frame and body life, the body subframe shall be fastened to the chassis frame with four (4) 1/2" x 2" strap mounts, welded to the body subframe. The straps shall be bolted to the chassis frame work utilizing 1/2" Grade 8 bolts.

## **10" REAR STEP BUMPER**

The full width rear bumper shall be constructed from 2" x 2" x 1/4" aluminum tubing frame and covered with 3/16" NFPA compliant aluminum tread plate. The bumper shall extend from the rear vertical body panel 10" and provide a rear step with a minimum of 1/2" space at body for water drainage.

## **REAR TOW EYES**

There shall be two (2) heavy duty rear mounted tow eyes securely attached to the body subframe, below body. The tow eyes shall be fabricated from 3/4" thick steel plate with a 3" diameter opening. Tow eyes shall have a black powder coat finish.

## **TRAILER HITCH**

A Class III weight carrying capacity rear hitch receiver shall be provided below the rear bumper. The receiver shall be attached to chassis frame with heavy duty steel frame work with a black hammertone powder coat paint finish.

The hitch shall be complete with a 2" square receiver. Without the use of a "weight distribution" ball hitch the Class III receiver shall have a capacity of 6,000 lbs. gross trailer weight and a maximum tongue weight of 600 lbs.

A label shall be provided in a location in which it is visible to an operator making trailer connections. The label shall state the maximum GVWR and tongue weight of the trailer that can be safely towed with the hitch system.

Two (2) safety chain attachment points shall be provided near the hitch point for hitches designed to use safety chains, each designed with an ultimate strength of not less than the maximum GVWR specified on label.

## **TRAILER ELECTRICAL RECEPTACLE**

For hydraulic brake equipped or electric brake equipped trailer towing capability, a primary electrical receptacle shall be provided near the hitch point and shall match the umbilical cable specified. Receptacle shall be a 7-Way Blade Type socket, the same as used on most Light Duty Trucks and RV's.

## **TRAILER AUXILIARY ELECTRICAL RECEPTACLE**

An auxiliary electrical receptacle shall be provided near the hitch point and shall match the umbilical cable specified for optical warning lights. Receptacle shall be a 7-Way Pin Type Socket, ISO3731 compliant with a reverse ground terminal.

## **RECEIVER WITH TRAILER BALL**

No hitch receiver with trailer ball will be provided with completed unit.

## **GROUND LIGHTS**

There shall be two (2) OnScene 8" Access white LED lights installed below bumper capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting shall be switchable but activated automatically when the vehicle park brake is set.

## **WHEEL WELL EXTERIOR PANEL**

The exterior panel of the body wheel well enclosure shall be constructed from 1/8" aluminum smooth plate.

## **DIEFORMED BEADED EDGE BODY FENDERS**

A die formed beaded edge shall be provided along the radius of the wheel well opening for a finished appearance.

## **WHEEL WELL LINERS**

The wheel wells shall be provided with an easily removable polymer, circular inner fender liner. The inner liner shall be bolted to the wheel well with stainless steel bolts and spaced away from the wheel well so the liner will not accumulate dirt or water.

## **SCBA CYLINDER COMPARTMENTS**

Two (2) SCBA cylinder storage compartments shall be provided on curbside of the body in rear wheel well area. Each compartment shall have a stainless steel hinge with brushed stainless steel door assembly with a positive catch latch. Each compartment shall have a 8" diameter tube behind the wheel well panel attached to the door assembly. Each compartment shall allow the storage of an SCBA cylinder or a fire extinguisher up to 7-3/4" in diameter x 22" deep. The door shall activate the "Hazard Warning Light" in the cab when not in the closed position.

## **FASTENERS**

Prior to the assembly and reinstallation of exterior components; i.e. warning and DOT lights, handrails, steps, door hardware, and miscellaneous items, a Mylar isolation tape, or gasket shall be used to prevent damage to the finish painted surface. These components shall be fastened to body using either a plastic insert into body metal with stainless steel screws or zinc coated nut-surts into body surface using stainless steel bolts to resist corrosion from dissimilar metals.

## **ELECTROLYSIS CORROSION CONTROL**

The vehicle shall be assembled using ECK brand or similar corrosion control compound on all high corrosion potential areas.

ECK protects aluminum and stainless steel against electrolytic reaction, isolates dissimilar metals and gives bedding protection for hardware and fasteners. ECK contains anti-seizing lubricant for threads. ECK is dielectric and perfect for use with electrical connectors.

### **PAINT FINISH - SINGLE COLOR**

The body shall be painted with a single color of PPG Delfleet® Evolution per Sugar Loaf Fire approved paint spray out provided.

- Paint Color: Match cab/chassis supplied paint color.

### **BODY UNDERCOATING**

The entire underside of body shall be sprayed with black automotive undercoating. Undercoating shall cover all areas underside of body and wheel well area to help resist corrosion under the vehicle.

### **UNDERCOAT WARRANTY**

The body undercoating shall have a warranty provided by the manufacturer for the lifetime of the vehicle or twenty (20) years, whichever occurs first. The warranty shall be transferable between vehicle owners. Should the undercoating material applied to the underside of the body and wheel wells of the vehicle ever flake off, peel, chip or crack due to drying out, the damaged area shall be re-sprayed without charge to the vehicle owner.

### **PAINT WARRANTY**

The vehicle shall be provided with a ten (10) year non-prorated warranty to the original owner. Warranty is provided by PPG Inc. A warranty sheet with all conditions and maintenance procedures shall be provided with the delivered vehicle. **Pro-rated warranties will not be acceptable.**

### **COMPARTMENT INTERIOR FINISH**

The interior of all exterior body compartments shall be a "Maintenance Free" smooth unpainted finish. All body seams shall be finished with a caulk sealant for both appearance and moisture protection.

## **REFLECTIVE STRIPE REQUIREMENTS**

### **Material**

All retroreflective materials shall conform to the requirements of ASTM D4956, *Standard Specification for Retroreflective Sheeting for Traffic Control*, Section 6.1.1 for Type I Sheeting.

All retroreflective materials used that are colors not listed in ASTM D4956, Section 6.1.1, shall have a minimum coefficient of retro-reflection of 10 with observation angle of 0.2 degrees and entrance angle of -4 degrees.

Any printed or processed retroreflective film construction used shall conform to the standards required of an integral colored film as specified in ASTM D4956, Section 6.1.1.

### **Minimum Requirements**

A retroreflective stripe(s) shall be affixed to at least 50 percent of the cab and body length on each side, excluding the pump panel areas, and at least 25 percent of the width of the front of the vehicle, not including mirrors or other protrusions.

The stripe or combination of stripes shall be a minimum of 4 in. (100 mm) in total width.

The 4 in. (100 mm) wide stripe or combination of stripes shall be permitted to be interrupted by objects (i.e., receptacles, cracks between slats in roll up doors) provided the full stripe is seen as conspicuous when approaching the apparatus.

A graphic design shall be permitted to replace all or part of the required striping material if the design or combination thereof covers at least the same perimeter length(s).

### **GRAPHICS PROOF (Reference Signed approval also)**

A color graphics proof of the reflective striping layout shall be provided for approval by Sugar Loaf Fire prior to installation. The graphics proof shall be submitted to Sugar Loaf Fire on 8.5" x 11" sheets with front, sides, rear and plan views, each on one (1) sheet. In addition if there is any special art work an additional sheet shall be provided showing all details. **Note:** The graphics color proof may not reflect the correct paint break lines on the chassis and body please refer to the paint section of your specifications for correct paint break lines.

### **REFLECTIVE STRIPE - CAB SIDE**

The reflective stripe material shall be 6" wide, 3M Scotchlite 680 series graphic film.

- This reflective stripe shall be white in color.

### **REFLECTIVE STRIPE - CAB FRONT**

The reflective stripe material shall be 6" wide, 3M Scotchlite 680 series graphic film.

- This reflective stripe shall be white in color.

### **CHEVRON STRIPE - CAB BUMPER**

A reflective stripe shall be affixed to the front of cab. The stripe or combination of stripes shall be a minimum of 4 in. (100 mm) in total width.



The approximate 10" wide Chevron retroreflective stripe shall be affixed to at least 25 percent of the width of the front of the apparatus with retroreflective striping in a chevron pattern sloping downward and away from the centerline of the vehicle at an angle of 45 degrees. Each stripe shall be 6" width. Chevron panels shall have a 3M UV over laminate to protect from UV rays, scene damage, and everyday use. Chevron panels shall have a minimum 10 year warranty for material failure, and colorfastness.

- The stripe material shall be 3M Scotchlite 680 series graphic film.

All retroreflective materials required shall conform to the requirements of ASTM D 4956, *Standard Specification for Retroreflective Sheeting for Traffic Control*, Section 6.1.1 for Type I Sheeting.

- This reflective stripe shall be black in color.

### **REFLECTIVE STRIPE - CAB DOOR INTERIOR**

Any door of the apparatus designed to allow persons to enter or exit the apparatus shall have at least 96 in.2 (62,000 mm2) of retroreflective material affixed to the inside of the door.

The inside of each cab door shall have 4" Chevron style 3M Scotchlite 680 series graphic film.

This reflective chevron stripe shall alternate red and yellow in color.

### **REFLECTIVE STRIPE - BODY SIDES**

The reflective stripe material shall be 6" wide, 3M Scotchlite 680 series graphic film.

- This reflective stripe shall be white in color.

The stripe shall extend from the front of cab in a straight line, then just ahead of the rear wheels the stripe shall angle up and extend straight back to the rear of the body.

### **CHEVRON REFLECTIVE STRIPE - REAR SIDES PANELS**

At least 50 percent of the rear-facing vertical surfaces, visible from the rear of the apparatus, excluding any pump panel areas not covered by a door, shall be equipped with retroreflective striping in a chevron pattern sloping downward and away from the centerline of the vehicle at an angle of 45 degrees. Each stripe shall be 6" width.

The rear side panels of the body on each side of a rear stairway or compartment shall have a chevron style reflective stripe, extending from bumper height up to side compartment drip rail height. Each chevron panel shall be a full sheet and shall have a 3M UV over laminate to protect from UV rays, scene damage, and everyday use.

The stripe material shall be 3M Diamond Grade.

This reflective chevron stripe shall alternate red and fluorescent yellow-green in color.

## **LETTERING**

### **GRAPHICS PROOF**

A color graphics proof of the lettering layout shall be provided for approval by Sugar Loaf Fire prior to installation. The graphics proof shall be submitted to Sugar Loaf Fire on 8.5" x 11" sheets with front, sides, rear and plan views, each on one (1) sheet. In addition if there is any special art work an additional sheet shall be provided showing all details.

The following lettering shall be provided and installed on the completed unit as follows;

### **SIDE CAB DOOR LETTERING**

There shall be thirty six (36) 3" high reflective letters furnished and installed on the vehicle.

"SUGAR LOAF FIRE DEPT" Shall be located on each door.

- This reflective lettering shall be gold in color.

### **UPPER BODY SIDE LETTERING**

There shall be twenty (20) 4" high reflective letters furnished and installed on the vehicle.

"RESCUE 5522" shall be located on each upper body side.

- This reflective lettering shall be white in color.

### **REAR BODY LETTERING**

There shall be four (4) 4" high reflective letters furnished and installed on the vehicle.

- This reflective lettering shall be white in color.

### **FRONT OF CAB LETTERING**

#### **CUSTOM DECAL LOGO - 12" -18"**

One (1) custom designed 12" - 18" 3M Scotchlite type retroreflective logo shall be provided and located on the completed vehicle. The exact design and/or artwork shall be provided by the Sugar Loaf Fire prior to construction.

One (1) copy of the above custom logo shall be provided and located on the completed vehicle as directed by Sugar Loaf Fire.

**EXTERIOR COMPARTMENT DOORS**

**ROLL-UP DOOR CONSTRUCTION - ROBINSON (ROM)**

The vehicle shall be equipped with R•O•M Series IV roll-up exterior compartment doors. The R•O•M roll-up doors shall be complete with the following features;

Each shutter slat, track, bottom rail, and drip rail shall be constructed from anodized 6063 T6 aluminum. Shutter slats shall feature a double wall extrusion 0.315" thick with a concave interior surface to minimize loose equipment jamming the shutter door closed. Shutter slats shall feature an interlocking end shoe to prevent side to side binding of the shutter door during operation. Slat must have interlocking joints with an inverted locking flange. Slat inner seal shall be a one piece PVC extrusion; seal design will be such to prevent metal to metal contact while minimizing dirt and water from entering the compartment.

Shutter door track shall be one piece design with integral overlapping flange to provide a clean finished look without the need of caulk. Door track shall feature an extruded Santoprene rubber double lip low profile side seal with a silicone co-extruded back to reduce friction during shutter operation.

Shutter bottom rail shall be a one piece double wall extrusion with integrated finger pull. Finger pull shall be curved upward with a linear striated surface to improve operator grip while operating the shutter door. Bottom rail shall have a smooth contoured interior surface to prevent loose equipment from jamming the shutter door. Bottom rail seal shall be made from Santoprene; it will be a double "V" seal to resist water and debris from entering compartment. Bottom rail lift bar shall be a one piece "D" shaped aluminum extrusion with linear striations to improve operator grip during operation. Lift bar shall have a wall thickness of 0.125". Lift bar shall be supported by no less than two pivot blocks; pivot blocks shall be constructed from Type 66 Glass filled reinforced nylon for superior strength. Bottom rail end blocks shall have incorporated drain holes which will allow any moisture that collects inside the extrusion to drain out.

Shutter door shall have an enclosed counter balance system. Counter balance system shall be 4" in diameter and held in place by two (2) heavy duty 18 gauge zinc plated plates. Counter balance system shall have two (2) over-molded rubber guide wheels to provide a smooth transition from vertical track to counter balance system; no foam material of any kind shall be permitted or used in this area.

The R•O•M Series IV roll-up compartment doors shall be free of manufacturing defects for a period of up to 7 years from date of purchase provided doors are used under conditions of normal use, regular periodic maintenance and service is performed, and doors were installed in accordance with R•O•M's instructions.

**ROM DOOR BOTTOM RAIL**

All exterior compartment doors shall have the standard 3.0" tall bottom rail extrusion for easy one (1) hand opening and closing.

The specified retroreflective stripe material shall be applied on the roll-up compartment doors. The stripe shall be precision machine cut for each door slat of the roll-up doors. Under no circumstance will the stripe material be cut on roll-up door surface.

**BODY HEIGHT MEASUREMENTS**

The vertical body dimensions shall be as follows:

**AHEAD OF REAR AXLE**

	<u>Description</u>	<u>Dimension</u>
A	Bottom of Subframe to Top of Body	64.0"
B	Bottom of Subframe to Bottom of Body	18.0"

C	Vertical Door Opening -with roll-up door -with hinged door	60.5" 59.0"
---	--	----------------

**ABOVE REAR AXLE**

	<u>Description</u>	<u>Dimension</u>
D	Vertical Door Opening - Above Rear Wheel -with roll-up door -with hinged door	37.0" 35.5"

**BEHIND REAR AXLE**

	<u>Description</u>	<u>Dimension</u>
E	Bottom of Subframe to Bottom of Body	15.0"
F	Vertical Door Opening -with roll-up door -with hinged door	53.0" 56.5"

**GENERAL**

	<u>Description</u>	<u>Dimension</u>
G	Bottom or Drip Rail to Top of Body	13.5"

(Dimensions are approximate and subject to change during construction or design process.)

**BODY WIDTH DIMENSIONS**

The body shall be 96.0" wide, and 98.0" wide at drip rails. Interior compartment depth dimensions shall be approximately:

<u>Area Description</u>	<u>Dimension</u>
Transverse above subframe	91.0"
Compartment depth below subframe	21.0"

## STREETSIDE COMPARTMENT - FRONT (S1)

The interior useable compartment width shall be approximately 32.0" wide.

- This compartment shall have a R•O•M series IV roll-up door.
- The compartment door opening shall be approximately 25" wide.
- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior door track to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.

## COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 83 series aluminum tray base with 70% extension, and rating of 1,000 lbs. Slide-out tray(s) base shall be full width (street/curb) and as wide as the compartment layout or door opening permits, capable of extending out either side of the body located above the level of the chassis frame rails. Each slide base shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will lock the tray in the closed, 40% extended and 70% extended positions.
  - Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
    - **Two (2) rows of shelf trac horizontally installed to mount SCBA Brackets.**
  - The above component(s) shall have a smooth un-painted finish.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- There shall be four (4) Zico 1000 series KD-UH walkaway type SCBA air pack bracket(s) with high cycle coated spring clips and short foot plate.

The SCBA Spring Clips shall be mounted on the vertical partition located on the pull out tray.

- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- Two (2) OnScene Access white LED, full height compartment lights, vertically mounted.
- The controls for the specified light tower(s).

**The light tower controller shall be located above the frame rails and mounted flat on the front wall.**

- The 12 volt electrical distribution panel shall be located in the front lower compartment.

## STREETSIDE COMPARTMENT - ABOVE REAR WHEELS (S2)

The interior useable compartment width shall be approximately 45.0" wide.

- This compartment shall have a R•O•M series IV roll-up door.
- The compartment door opening shall be approximately 38" wide.
- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior door track to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.

## COMPARTMENT LAYOUT

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 83 series aluminum tray base with 70% extension, and rating of 1,000 lbs. Slide-out tray(s) base shall be full width (street/curb) and as wide as the compartment layout or door opening permits, capable of extending out either side of the body located above the level of the chassis frame rails. Each slide base shall have a cable operated, spring loaded latch complimented by a large hand opening and red pull handle (Pull to Release) which will lock the tray in the closed, 40% extended and 70% extended positions. Each tray top shall be fabricated from 3/16" 3003 aluminum sheet shall have welded corners to form a box type tray surface with an internal depth of approximately 3 ½".
- **There shall be a second level of aluminum added to the tray to match current SVI truck. Second layer tray will be on the curbside half only.**
  - The above component(s) shall have a smooth un-painted finish.
- 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- There shall be one (1) transverse module fabricated from 3/16" (.188) 3003H-14 aluminum alloy smooth sheet. The module will be designed for the following long tools and equipment:

- One (1) Sugar Loaf Fire supplied stokes basket(s). **83" Long x 22" Wide x 8" Tall.**
- One (1) Sugar Loaf Fire supplied scoop. **Will be stored in the Stokes basket.**
- One (1) Sugar Loaf Fire supplied back board(s) shall be installed after delivery. Will be stored in the Stokes Basket.
- There shall be one (1) OnScene Solutions Velcro cargo straps provided to secure the stored equipment.
- Two (2) OnScene Access white LED, full height compartment lights, vertically mounted.



### **STREETSIDE COMPARTMENT - REAR (S3)**

The interior useable compartment width shall be approximately 35.5" wide.

- This compartment shall have a R•O•M series IV roll-up door.
- The compartment door opening shall be approximately 28.5" wide.
- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior door track to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.

### **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) adjustable shelf/shelves approximately 21" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges.
  - The above component(s) shall have a smooth un-painted finish.
  - 3M™ Diamond Grade™ Conspicuity striping shall be provided on the front face of the shelf(s).
- This reflective stripe shall be red/white in color.
- The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
- Two (2) OnScene Access white LED, full height compartment lights, vertically mounted.
- There shall be one pair of battery direct and ground power studs provided as a Blue Sea Systems Dual PowerPost assembly. The ground post shall be 3/8-16 thread and the positive post shall be 5/16-18 thread. Top cable to include a color coded post cover.

- The power stud shall be protected by a 40 amp maxi fuse located at the source.
- PowerPost shall be located in the top left interior corner.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

## **CURBSIDE COMPARTMENT - FRONT (C1)**

The interior useable compartment width shall be approximately 32.0" wide.

- This compartment shall have a R•O•M series IV roll-up door.
- The compartment door opening shall be approximately 25" wide.
- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior door track to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.

## **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 83 series aluminum tray base with 70% extension, and rating of 1,000 lbs. Slide-out tray(s) base shall be approximately 94" deep; capable of extending out either side of the body located above the level of the chassis frame rails. (Specified in opposite side compartment.)
  - Vertical partition(s) shall be provided on slide-out tray base dividing the tray into left and right sides. Each vertical partition shall be horizontally adjustable; mounted on aluminum Shelf Trac on tray floor. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.
  - 3M™ Diamond Grade™ 2" wide conspicuity striping shall be provided on the front and side faces of the tray.
- The floor of the compartment above the frame rails shall be extended to the interior edge of the door. The floor shall have a 2" vertical lip and a 1" return to increase strength.
- Two (2) OnScene Access white LED, full height compartment lights, vertically mounted.

## **CURBSIDE COMPARTMENT - ABOVE REAR WHEEL (C2)**

The interior useable compartment width shall be approximately 45.0" wide.

- This compartment shall have a R•O•M series IV roll-up door.
- The compartment door opening shall be approximately 38 wide.
- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior door track to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.

## **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) OnScene Solutions 83 series aluminum tray base with 70% extension, and rating of 1,000 lbs. Slide-out tray(s) base shall be approximately 94" deep; capable of extending out either side of the body located above the level of the chassis frame rails. (Specified in opposite side compartment.)
- There shall be a transverse storage module which extends from the opposite side of the body (specified in opposite side compartment).
  - There shall be one (1) OnScene Solutions Velcro cargo straps provided to secure the stored equipment.
- Two (2) OnScene Access white LED, full height compartment lights, vertically mounted.

### **CURBSIDE COMPARTMENT - REAR (C3)**

The interior useable compartment width shall be approximately 35.5" wide.

- This compartment shall have a R•O•M series IV roll-up door.
- The compartment door opening shall be approximately 28.5" wide.
- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior door track to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.

### **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be three (3) adjustable shelf/shelves approximately 21" deep. Each shelf shall be fabricated from 3/16" 3003 aluminum sheet with a 2" vertical flange along the front and rear edges.
  - The above component(s) shall have a smooth un-painted finish.
  - 3M™ Diamond Grade™ Conspicuity striping shall be provided on the front face of the shelf(s).
- The floor of the compartment above the frame rails shall cover the area directly above the frame rails ONLY (non-extended floor).
- Two (2) OnScene Access white LED, full height compartment lights, vertically mounted.
- There shall be one (1) 120 VAC outlet(s) located in compartment.
  - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
  - Outlet(s) shall be powered through the on-board shore power system.

- The outlet shall be located on forward wall, upper left area.
- Two (2) 3-1/2" x 3-1/2" black plastic louvered vents shall be provided in the lower compartment.

## **REAR COMPARTMENT - CENTER (RC1)**

The rear center compartment shall be closed to both side rear compartments.

The rear center compartment shall start at the top of the body sub-frame and be as high as the side compartments, unless specified otherwise.

The interior useable compartment width shall be approximately 45.0" wide.

- This compartment shall have a R•O•M series IV roll-up door.
- The compartment door opening shall be approximately 38" wide.
- The roll-up door shall have an unpainted satin aluminum finish on the door slats and the door trim components.
- The door shall be equipped with a CPI harsh environment mechanical type door ajar switch located inside compartment interior door track to activate compartment lighting and door ajar signal in cab when door is opened.
- There shall be NO keyed lock on this roll-up compartment door.
- One (1) 1" wide elastic nylon strap shall be provided to assist in closing the compartment door. The strap shall be fastened to the lower left inside door sill with a nickel plated Footman loop secured to back of door. The strap shall extend from door to a nickel plated Footman loop secured to wall or vertical slot of Shelf-Trac on left side of the door opening.
- One (1) aluminum drip pan/door guard shall be provided below door roll area. Drip pan/door guard shall have thumb nuts making it easily removable without tools with a maintenance-free, un-painted finish. A plastic drain line shall be provided on each end of the drip pan to lower door threshold.
- Compartment threshold protection shall be provided on the bottom edge of the compartment door sill. The threshold protection shall be an extruded aluminum shape with an un-painted anodized finish.

## **COMPARTMENT LAYOUT**

- There shall be vertically mounted aluminum Shelf-Trac welded to compartment walls for specified component installation. Shelf-Trac extrusion shall have side extruded channels for use in mounting or securing special ancillary items, without need for drilling into body.
- There shall be one (1) vertical compartment partition(s) provided dividing the compartment into fore and aft sides. The vertical partition(s) shall be 3/16" (.188) 3003H-14 alloy smooth aluminum sheet.

**The vertical partition shall be located approximately 11" from the Streetside Door Track and shall be designed to hold a Ferno Stair Chair.**

- Partition shall be bolted in position at base and top of partition.
- The above component(s) shall have a smooth un-painted finish.
- Two (2) OnScene Access white LED, full height compartment lights, vertically mounted.

- There shall be one pair of battery direct and ground power studs provided as a Blue Sea Systems Dual PowerPost assembly. The ground post shall be 3/8-16 thread and the positive post shall be 5/16-18 thread. Top cable to include a color coded post cover.
- The power stud shall be protected by a 40 amp maxi fuse located at the source.
- PowerPost shall be located in the top left interior corner.
- There shall be one (1) 120 VAC outlet(s) located in compartment.
  - The outlet receptacle(s) shall be 20 amp, straight-blade (NEMA 5-20R).
- There shall be one (1) approximate 2' long 120 VAC outlet strip(s) with straight blade household type outlets provided.
  - Outlet(s) shall be powered through the on-board shore power system.



## **UPPER BODY OPEN STORAGE COMPARTMENT - CENTER**

Above the ~~forward~~ exterior compartments shall be an upper body storage compartment with sides fabricated from 1/8" (.125) aluminum 3003H-14 tread plate ~~with a 1" lip with a 1" return break formed into upper edges for strength and rigidity. Rows of large diamond pattern holes shall be provided for ventilation.~~

The floor shall be fabricated from 1/8" (.125) aluminum 3003H-14 **smooth tread** plate. The compartment shall be open on the top and bolted to body roof with stainless steel hardware.

The compartment shall be ~~12" deep x 48" wide x 36" front to back.~~ **approximately 8" deep x 62" wide x 99" long**

**Install six (6) stainless steel D-Rings to the upper side walls of the tub, one (1) each front and rear centered and two (2) street/curbsides evenly spaced. McMaster 3076T037 or equivalent.**

**Tub shall include drains to the ground.**

## **BODY OPTIONS AND UPGRADES**

### **LOWER SIDE BODY PROTECTION - RUB RAIL**

OnScene Solutions rub rails shall be provided below the compartment door openings on both the streetside and curbside.

The rub rail shall be fabricated from 6063 extruded aluminum, measuring approximately 2-3/4" high x 1-3/8" thick with tapered aluminum end caps. The rub rail shall be bolted to the body using stainless steel bolts and 1-1/2" diameter x 5/8" thick rubber mount isolators to prevent damage to the body.

The rails shall incorporate LED clearance marker lighting recessed into the rail fascia to avoid damage to the light in case of impact. The rub rail shall have an accessory mounting track integrated into the backside of the rail to allow mounting of accessories such as ground lighting.

3M™ Diamond Grade™ Conspicuity striping shall be provided in the rub rail. The striping shall be red/white in color.

### **FRONT PROTECTION PANELS**

To protect areas subject to intensive wear, scuffing or abuse, the protection panels shall be installed on the entire front vertical body panels and wrap around to the front compartment door opening. The protection panels shall be fabricated from 1/8" aluminum treadplate.

## **ROOF ACCESS HANDRAIL**

There shall be one (1) 24" horizontal handrail mounted on top of body to assist in roof access. Handrail shall be NFPA compliant 1-1/4" knurled 304 stainless steel with welded end stanchions.

A safety sign FAMA23, which warns of the proper climbing method, shall be visible to personnel entering the cab and at each designated climbing location on the body.

A safety sign FAMA24, which warns personnel not to ride on the vehicle, shall be located at the rear step areas and at any cross walkways.

**The handrail shall be located on the curbside rear of body 6" forward of rear panel and centered between the tub side wall and curbside edge of treadplate.**

## **FOLDING STEP(S)**

There shall be four (4) Innovative Controls polished cast aluminum folding step(s) provided and installed on completed vehicle. Each step shall be heavy duty with stainless steel spring and textured step surface meeting NFPA standards. Each step shall include an LED light.

**The steps shall be located on the curbside rear of body.**

## **LOW VOLTAGE ELECTRICAL SYSTEM- 12 VDC**

### General

Any low voltage electrical systems or warning devices installed on the fire apparatus shall be appropriate for the mounting location and intended electrical load.

Where wire passes through sheet metal, grommets shall be used to protect wire and wire looms. Electrical connections shall be with double crimp water-tight heat shrink connectors.

All 12 VDC wiring running from front to back of vehicle body shall be run in full length electrical wiring raceway down each side of body.

### Wiring

All electrical circuit feeder wiring supplied and installed by the fire apparatus manufacturer shall meet the requirements of NFPA Chapter 13.

The circuit feeder wire shall be stranded copper or copper alloy conductors of a gauge rated to carry 125 % of the maximum current for which the circuit is protected. Voltage drops in all wiring from the power source to the using device shall not exceed 10 %. The use of star washers for circuit ground connections shall not be permitted.

All circuits shall otherwise be wired in conformance with SAE J1292, *Automobile, Truck, Truck-Tractor, Trailer, and Motor Coach Wiring*.

## Wiring and Wire Harness Construction

All insulated wire and cable shall conform to SAE J1127, *Low Voltage Battery Cable*, or SAE J1128, *Low Voltage Primary Cable*, type SXL, GXL, or TXL.

All conductors shall be constructed in accordance with SAE J1127 or SAE J1128, except where good engineering practice dictates special strand construction. Conductor materials and stranding, other than copper, shall be permitted if all applicable requirements for physical, electrical, and environmental conditions are met as dictated by the end application. Physical and dimensional values of conductor insulation shall be in conformance with the requirements of SAE J1127 or SAE J1128, except where good engineering practice dictates special conductor insulation. The overall covering of conductors shall be moisture-resistant loom or braid that has a minimum continuous rating of 194°F (90°C) except where good engineering practice dictates special consideration for loom installations exposed to higher temperatures. The overall covering of jacketed cables shall be moisture resistant and have a minimum continuous temperature rating of 194°F (90°C), except where good engineering practice dictates special consideration for cable installations exposed to higher temperatures.

All wiring connections and terminations shall use a method that provides a positive mechanical and electrical connection. The wiring connections and terminations shall be installed in accordance with the device manufacturer's instructions. All ungrounded electrical terminals shall have protective covers or be in enclosures. Wire nut, insulation displacement, and insulation piercing connections shall not be used.

Wiring shall be restrained to prevent damage caused by chafing or ice buildup and protected against heat, liquid contaminants, or other environmental factors.

Wiring shall be uniquely identified at least every 2 ft (0.6 m) by color coding or permanent marking with a circuit function code. The identification shall reference a wiring diagram.

Circuits shall be provided with properly rated low voltage over-current protective devices. Such devices shall be readily accessible and protected against heat in excess of the over-current device's design range, mechanical damage, and water spray. Circuit protection shall be accomplished by utilizing fuses, circuit breakers, fusible links, or solid state equivalent devices.

If a mechanical-type device is used, it shall conform to one of the following SAE standards:

- 1) SAE J156, *Fusible Links*
- 2) SAE J553, *Circuit Breakers*
- 3) SAE J554, *Electric Fuses (Cartridge Type)*
- 4) SAE J1888, *High Current Time Lag Electric Fuses*
- 5) SAE J2077, *Miniature Blade Type Electrical Fuses*

Switches, relays, terminals, and connectors shall have a direct current (dc) rating of 125 % of maximum current for which the circuit is protected.

## Power Supply

A 12 V or greater electrical alternator shall be provided. The alternator shall have a minimum output at idle to meet the minimum continuous electrical load of the vehicle, at 200°F (93°C) ambient temperature within the engine compartment, and shall be provided with full automatic regulation.

## Minimum Continuous Electrical Load

The minimum continuous electrical load shall consist of the total amperage required to simultaneously operate the following in a stationary mode during emergency operations:

- 1) The propulsion engine and transmission
- 2) All legally required clearance and marker lights, headlights, and other electrical devices except windshield wipers and four-way hazard flashers
- 3) The radio(s) at a duty cycle of 10 percent transmit and 90 % receive (for calculation and testing purposes, a default value of 5 A continuous)
- 4) The lighting necessary to produce 2 fc (20 lx) of illumination on all walking surfaces on the apparatus and on the ground at all egress points onto and off the apparatus, 5 fc (50 lx) of illumination on all control and instrument panels, and 50 percent of the total compartment lighting loads
- 5) The minimum optical warning system, where the apparatus is blocking the right-of way
- 6) The continuous electrical current required to simultaneously operate any fire pumps, aerial devices, and hydraulic pumps
- 7) Other warning devices and electrical loads defined by the purchaser as critical to the mission of the apparatus

If the apparatus is equipped to tow a trailer, an additional 45 A shall be added to the minimum continuous electrical load to provide electrical power for the federally required clearance and marker lighting and the optical warning devices mounted on the trailer.

The condition of the low voltage electrical system shall be monitored by a warning system that provides both an audible and a visual signal to persons on, in, or near the apparatus of an impending electrical system failure caused by the excessive discharge of the battery set.

The charge status of the battery shall be determined either by direct measurement of the battery charge or indirectly by monitoring the electrical system voltage.

If electrical system voltage is monitored, the alarm shall sound if the system voltage at the battery or at the master load disconnect switch drops below 11.8 V for 12 V nominal systems, 23.6 V for 24 V nominal systems, or 35.4 V for 42 V nominal systems for more than 120 seconds.

A voltmeter shall be mounted on the driver's instrument panel to allow direct observation of the system voltage.

#### Electromagnetic Interference

Electromagnetic interference suppression shall be provided, as required, to satisfy the radiation limits specified in SAE J551/1, *Performance Levels and Methods of Measurement of Electromagnetic Compatibility of Vehicles, Boats (up to 15 m), and Machines (16.6 Hz to 18 GHz)*.

#### Wiring Diagram

A complete electrical wiring schematic of actual system shall be provided with finished apparatus. Similar or generic type electrical schematics shall NOT BE ACCEPTABLE.

#### Low Voltage Electrical System Performance Test

A low voltage electrical system test certification shall be provided with delivered apparatus.

## **12 VOLT DIAGNOSTIC RELAY CONTROL CENTER**

The 12 volt power distribution shall be conveniently located with easy access for service. All relays and circuit breakers shall be plug-in type allowing for removal for repairs without necessitating soldering or tools. The sockets mounts for both the relays and circuit breakers shall be of a design that permits the use of standard automotive type components.

The 12 volt distribution panel shall utilize printed circuit boards mounted in high strength enclosure. Each printed circuit board shall be provided with twelve (12) heavy duty independent switching relays. Each relay shall have the ability to be configured either normally open or normally closed and be protected by a 20 amp automatic reset breaker. Each circuit will be provided with a LED for visual diagnostic.

Power distribution panel shall be located in apparatus body within a protected enclosure with removable or hinged cover.

## **ELECTRICAL SYSTEM MANAGER**

### **LOAD MANAGEMENT**

If the total continuous electrical load exceeds the minimum continuous electrical output rating of the installed alternator(s), an Innovative Controls automatic electrical load management system shall be required. The minimum continuous electrical loads shall not be subject to automatic load management.

The apparatus 12 volt electrical system shall be provided with a system manager for:

- Monitoring chassis battery voltage
- Shedding pre-determined electrical circuits
- Sequencing pre-determined electrical circuits
- Automatically controlling chassis engine fast-idle
- Monitor master switch and parking brake applications
- Automatically control warning light modes ("Calling-For" and "Blocking Right of Way")
- Provide low voltage alarm
- Programmable control circuits
- Remote system status indicator panel

System manager shall perform all electrical functions required by current NFPA 1901 Standards.

### **BATTERY MONITORING**

The system manager shall monitor the vehicle battery voltage. When electrical loads exceed the alternator output and the voltage drops, the load manager shall start shutting down electrical outputs. The system shall shut down only as many outputs required to maintain the system voltage. A special indicator to show different states of the electrical system by flashing at rate proportional to the battery discharge.

### **LOAD SEQUENCING AND SHEDDING**

The system shall be capable of sequentially switching and shedding 12 volt loads. The Master light switch starts the sequential switch when it is turned "On". Likewise turning the Master Switch "Off" will sequentially de-energize the loads.

## **BATTERY SYSTEM**

Any body builder supplied battery connections shall be heavy duty type with cables terminating in heat shrink loom. Heavy duty battery cables shall provide maximum power to the electrical system. Where required, the cables shall be shielded from exhaust tubing and the muffler. Large rubber grommets shall be provided where cables enter the battery compartment.

If an enclosed battery compartment is provided, it shall be ventilated to the exterior to prevent the buildup of heat and explosive fumes. The batteries shall be protected against vibration and temperatures that exceed the battery manufacturer's recommendation.

## **BATTERY SWITCH**

The chassis ignition key shall activate a heavy duty relay to provide 12 volt battery power to the vehicle.

## **BATTERY SOLENOID**

Battery switch shall consist of a minimum 200 ampere, constant duty solenoid to feed from positive side of battery.

## **BATTERY CONDITIONER**

One (1) Kussmaul model Auto Charge 1000 single battery conditioner, with 120 VAC input and 15 amp, 12 volt output shall be provided. This system shall monitor the condition of batteries and provide an electrical current at variable rates to overcome battery failure.

## **BATTERY CHARGE INDICATOR**

A Kussmaul 091-94-12 charge indicator display shall be provided and located near drivers' door area. This single battery system indicator is a suppressed zero bar graph voltage display which may be installed in any 12 volt system.

## **SHORE POWER INLET**

One (1) Kussmaul 120 VAC, 20 amp Super Auto-Eject shore power inlet(s) shall be provided. The shore power connection shall automatically disengage from vehicle when chassis ignition is engaged.

The protective ground from the shoreline inlet shall be bonded to the vehicle frame.

- The outlet cover shall be red.
- The shore power inlet shall be located on the streetside front of body, outboard of the cab.

## **ENGINE COMPARTMENT LIGHT**

Engine compartment light(s) shall be supplied and installed by the cab chassis manufacturer.

## **CAB HAZARD WARNING LIGHT**

A Truck-Lite red LED flashing light shall be provided and located in the driving compartment and be illuminated automatically whenever the vehicles parking brake is not fully engaged and any of the following conditions exist:

- Any passenger or equipment compartment door is not closed.
- Any ladder or equipment rack is not in the stowed position.
- Stabilizer system is not in its stowed position.
- Powered light tower is not stowed.
- Any other device permanently attached to the apparatus is open, extended, or deployed in a manner that is likely to cause damage to the apparatus if the apparatus is moved.

Compartments and equipment meeting all of the following conditions shall be permitted to be exempt from being wired to the hazard light:

- The volume is less than or equal to 4 ft<sup>3</sup> (0.1 m<sup>3</sup>).
- The compartment has an opening less than or equal to 144 in.<sup>2</sup> (92,900 mm<sup>2</sup>).
- The open door does not extend sideways beyond the mirrors or up above the top of the fire apparatus.
- All equipment in the compartment is restrained so that nothing can fall out if the door is open while the apparatus is moving.
- Manually raised pole lights with an extension of less than 5 ft (1.5 m).

The hazard light shall be labeled; "Do not move apparatus when light is on."

In addition, label shall be in both English/French for units built for Canada; "*Ne pas déplacer l'engin lorsque la lumière est allumée.*"

An audible alarm shall be provided for the door ajar light.

## **BACK-UP ALARM**

The body manufacturer shall furnish and install one (1) 107 dB(A) electronic back-up alarm. Back-up alarm to actuate automatically when the transmission gear selector is placed in reverse.

## **REAR VIEW CAMERA**

The cab chassis provided rear view box camera shall be installed on the rear of the body.

## **TAIL LIGHTS**

Rear body tail lights shall be vertically mounted and located per Federal Motor Vehicle Safety Standards, FMVSS and Canadian Motor Vehicle Safety Standards CMVSS. The following lights shall be provided;

- Two (2) Whelen 60BTT red LED stop/tail/turn lights, red lens
- Two (2) Whelen 60C00WCR white LED back-up lights, clear lens

Each light shall have a chrome flange.

## **MARKER LIGHTS**

The body shall be equipped with all necessary clearance lights and reflectors in accordance with Federal Motor Vehicle Safety Standards (FMVSS) and Canadian Motor Vehicle Safety Standards (CMVSS) regulations. All body clearance lights shall be Truck-Lite Mini LED to reduce the need for maintenance and lower the amp draw. Clearance lights shall be wired to the headlight circuit of the chassis.

## **CAB STEP LIGHTS / GROUND LIGHTS**

There shall be two (2) OnScene 8" Access white LED light(s) installed on the vehicle (equally divided per side) capable of providing illumination at a minimum level of 2 fc (20 lx) on ground areas within 30 in. (800 mm) of the edge of the vehicle in areas designed for personnel to climb onto or descend from the vehicle to the ground level.

Lighting designed to provide illumination on areas under the driver and crew riding area exits shall be switchable but activated automatically when the exit doors are opened.

## **LICENSE PLATE LIGHT**

One (1) Arrow #437 chrome plated LED license plate light shall be installed on the rear of the body. License plate light shall be wired to the headlight circuit of chassis. A fastener system shall be provided for license plate installation.

## **SIDE LED SCENE LIGHTS**

There shall be four (4) Whelen 600 Series Super-LED® model 6SC0ENZR, 6" x 4" surface mounted scene lights provided on the upper body. Light quantity shall be divided equally per side. The 600 configuration shall consist of 12 clear Super-LEDs and a clear gradient optic polycarbonate lens with chrome flange.

Two (2) switches shall be provided, one (1) for the streetside scene lights, and one (1) for the curbside scene lights.

The Lights shall be controlled at the Switch Panel in Cab.

## **REAR LED SCENE LIGHTS**

Two (2) Whelen 600 Series Super-LED® model 6SC0ENZR, 6" x 4" surface mounted scene lights provided on the upper rear body to light the work area immediately behind the vehicle. The 600 series light configuration shall consist of 12 clear Super-LEDs and a clear gradient optic polycarbonate lens.

The above scene lights shall light to a level of at least 3 fc (30 lx), measured at 25 equally spaced points on a 2.5 ft (750 mm) grid with in a 10 ft x 10 ft (3 m x 3m) square to the rear of vehicle.

The Lights shall be controlled at the Switch Panel in Cab.

The rear scene lights shall also be activated when the apparatus is in reverse.



## **TRAFFIC ADVISOR LIGHTS**

A traffic advisor system shall be provided on rear of vehicle using;

- Six (6) Whelen Wide-angle ION series amber Super-LED lights with clear lens.
- Chrome flanges.
- Lights shall be individually mounted and evenly distributed.

The lights shall be controlled by a Whelen TACTL5 control located in cab dash or center console area and provide; Left Arrow, Right Arrow, Center Out, and Wig-Wag patterns. The LED display on the control head shall replicate the Traffic Advisor's directional sequence. The TACTL5 shall have a rear panel dip switch for the ability to set eight additional Scan-Lock™ flash patterns. The wig-wag light pattern shall be activated with the E-Master and can be switched to the other patterns at any time through the control panel.

## **WARNING LIGHT PACKAGE**

### **UPPER LEVEL OPTICAL WARNING DEVICES**

The upper-level optical warning devices shall be mounted as high and as close to the corner points of the apparatus as is practical to define the clearance lines of the apparatus. The upper-level optical warning devices shall not be mounted above the maximum height, specified by the device manufacturer.

### **ZONES B AND D - SIDE WARNING LIGHTS**

#### **UPPER REAR CORNER WARNING LIGHTS**

There shall be two (2) Whelen 600 Series, linear super-LED Light(s) with full-fill optic provided, one (1) each side.

Each light shall have:

- Red LED's
- Red Lens

Each light shall have a chrome flange.

Flash Pattern shall be (factory default) Whelen ACTION SCAN

The Lights shall be controlled at the Switch Panel in Cab.

### ZONE C - REAR WARNING LIGHTS

There shall be two (2) Whelen 600 Series, linear super-LED Light(s) with full-fill optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

- Colored Lens

Each light shall have a chrome flange.

- Blue Light Streetside / Red Light Curbside

Flash Pattern shall be (factory default) Whelen ACTION SCAN

The Lights shall be controlled at the Switch Panel in Cab.

### LOWER LEVEL OPTICAL WARNING DEVICES

To define the clearance lines of the apparatus, the optical center of the lower-level optical warning devices in the front of the vehicle shall be mounted on or forward of the front axle centerline and as close to the front corner points of the apparatus as is practical.

The optical center of the lower-level optical warning devices at the rear of the vehicle shall be mounted on or behind the rear axle centerline and as close to the rear corners of the apparatus as is practical. The optical center of any lower-level device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground for large apparatus, and 18 in. and 48 in. (460 mm and 1600 mm) above level ground.

A midship optical warning device shall be mounted right and the left sides of the apparatus if the distance between the front and rear lower-level optical devices exceeds 25 ft (7.6 m) at the optical center. Additional midship optical warning devices shall be required, where necessary, to maintain a horizontal distance between the centers of adjacent lower-level optical warning devices of 25 ft (7.6 m) or less. The optical center of any midship mounted optical warning device shall be between 18 in. and 62 in. (460 mm and 1600 mm) above level ground.

### ZONES B AND D - BODY LIGHT (BODY WHEELWELL AREA)

There shall be two (2) Whelen surface mount ION Series LED light(s) with wide angle optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns.

Each light shall have:

- Red LEDs
- Clear Lens
- Black Flange

The Lights shall be controlled at the Switch Panel in Cab.

#### ZONES B AND D - BODY INTERSECTOR LIGHT (BODY REAR CORNERS)

There shall be two (2) Whelen surface mount ION Series LED light(s) with wide angle optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns.

Each light shall have:

- Red LEDs
- Clear Lens
- Chrome Flange

The Lights shall be controlled at the Switch Panel in Cab.

#### ZONE C - REAR WARNING LIGHTS (LOWER REAR CORNERS)

There shall be two (2) Whelen 600 Series, linear super-LED Light(s) with full-fill optic provided, one (1) each side. The light head shall include an integral flasher with programmable flash patterns and Hi/Lo intensities.

Each Light shall have:

- Colored Lens

Each light shall have a chrome flange.

- Red Light Streetside / Blue Light Curbside

Flash Pattern shall be (factory default) Whelen ACTION SCAN

The Lights shall be controlled at the Switch Panel in Cab.

## **EQUIPMENT PAYLOAD WEIGHT ALLOWANCE**

In compliance with NFPA 1901 standards, the special service vehicle shall be designed for an equipment loading allowance of 4,000 lbs. of Sugar Loaf Fire provided equipment based on a 30,001 - 40,000 pound gross vehicle weight rating.

## **EQUIPMENT**

The following equipment shall be furnished with the completed special service vehicle;

- One (1) container of assorted stainless steel nuts, bolts, screws and washers used in the construction of the apparatus shall be provided with the completed apparatus.
- There shall be two (2) Worden HW C7Y-WH yellow handled aluminum wheel chocks provided for 44" diameter tires that together will hold the vehicle when loaded to its GVWR or GCWR, on a hard surface with a 20% grade, with the transmission in neutral, and the parking brake released. The wheel chocks shall have a bright yellow powder coat finish for high visibility, safety and corrosion resistance.
  - The wheel chock(s) shall be mounted on the apparatus, location as per the Sugar Loaf Fire.  
**Wheel Chocks shall be mounted on rear of apparatus, below RC1 compartment and above bumper; one (1) streetside and one (1) curbside.**
- Three (3) Streamlight FireBox LED flashlight(s) with shoulder strap shall be provided be provided with 540/330 lumen output and 7/15 hour run time.. Each flashlight shall be orange in color and have a 12 volt DC charger and vehicle mount kit. Each flashlight shall have a LED E-Spot spotlight style bulbs and reflectors with 2 ultra-bright LED taillights. The flashlight(s) shall be wired to battery direct unless otherwise specified by Sugar Loaf Fire.
  - **The flashlight(s) shall be mounted on the completed unit in the RC1 compartment on the right hand side of the vertical partition on a plate mounted to shelf trac so as to be vertically adjustable.**

## **REMAINING NFPA MINOR EQUIPMENT BY PURCHASER**

All other minor equipment not specified above, but required by NFPA 1901 for special service vehicles, section 10.9.3 shall be supplied and mounted by Sugar Loaf Fire before the unit is placed in emergency service.